



FUEL/AIR DATA COMPUTER

(ADC 2000)

**P/NS:
962830-XY**

**INSTALLATION MANUAL
P/N: IM2830**

REV T

SHADIN AVIONICS
7555 Market Place Drive
Eden Prairie, MN 55344

Customer Service: 952-927-6500
<https://www.shadin.com/>
service@shadin.com

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: i of vi

PAGE CONTROL CHART

| <u>SECTION NO.</u> | <u>DESCRIPTION</u> | <u>PAGE</u> |
|--------------------|--|-------------|
| | REVISION LOG | v |
| 1.0 | OVERVIEW | |
| 1.1 | The Manual | 1-1 |
| 1.2 | Product Information | 1-1 |
| 1.3 | System Configuration | 1-2 |
| 1.4 | Fuel Totalizer Configuration | 1-3 |
| 1.5 | F/ADC2000, Argus Moving Map Configuration | 1-3 |
| 2.0 | FUEL AND AIR DATA SYSTEM SPECIFICATIONS | |
| 2.1 | Input Data Range | 2-1 |
| 2.2 | Output Data Range | 2-1 |
| 2.3 | Dimensions | 2-5 |
| 2.4 | Power Requirements | 2-5 |
| 2.5 | Output Data | 2-5 |
| | 2.5.1 Serial Output Data Parameters | 2-5 |
| | 2.5.2 ARINC 429 Labels Associated with Switch Settings | 2-6 |
| | 2.5.3 ARINC 429 Labels Associated with Switch Settings | 2-7 |
| 2.6 | Limitations | 2-8 |
| | 2.6.1 Warm-up Time | 2-8 |
| | 2.6.2 Supplemental Equipment | 2-8 |
| | 2.6.3 Static/Pitot Source Error Correction (SSEC/PSEC) | 2-8 |
| | 2.6.4 SSEC/PSEC Listing | 2-9 |
| 2.7 | Part Numbering Scheme | 2-14 |
| 2.8 | Electrical Interface Specifications | 2-15 |
| | 2.8.1 Heading Interface | 2-15 |
| | 2.8.2 Fuel Flow Interfaces | 2-15 |
| | 2.8.2.1 Digital Fuel Flow | 2-15 |
| | 2.8.2.2 Sine Wave Fuel Flow | 2-16 |
| | 2.8.2.3 DC Voltage Fuel Flow | 2-16 |
| | 2.8.3 Baro Interface | 2-16 |
| 2.9 | Statistical Specifications | |
| | 2.9.1 Mean Time Between Failures | 2-17 |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: ii of vi

| <u>SECTION NO.</u> | <u>DESCRIPTION</u> | <u>PAGE</u> |
|---------------------------|---|--------------------|
| 3.0 | CERTIFICATION | 3-1 |
| 4.0 | PLACING AN ORDER | 4-1 |
| 5.0 | INSTALLATION PROCEDURE | |
| 5.1 | General | 5-1 |
| 5.2 | F/ADC Location Selection | 5-1 |
| 5.3 | Mounting the F/ADC | 5-1 |
| 5.4 | Mounting the OAT Probe | 5-2 |
| 5.5 | Connection to the Fuel Flow Sensor | 5-3 |
| 5.6 | Connection to the Heading Source | 5-4 |
| 5.7 | Connection to the Pitot and Static Lines | 5-5 |
| 5.8 | Connection to the Navigation Management System | 5-6 |
| 5.9 | Connection to the Altimeter Baro Pot (optional) | 5-6 |
| 5.10 | Post Installation Checkout | 5-6 |
| 6.0 | OPERATING INSTRUCTIONS | 6-1 |
| 7.0 | INITIALIZATION | 7-1 |
| 8.0 | MAJOR COMPONENTS OF THE SYSTEM | 8-1 |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: iii of vi

| <u>SECTION NO.</u> | <u>DESCRIPTION</u> | <u>PAGE</u> |
|--------------------|---|-------------|
| 9.0 | CONFIGURING THE AIR DATA | |
| 9.1 | Configuring with 'ADSETUP User Manual' | 9-1 |
| 9.2 | Configuring Manually | 9-2 |
| | Loopback Procedure 1 for S/W Version 93.00.16 - 93.00.29 | 9-3 |
| | Stage 0 Loopback Configuration | 9-3 |
| | Stage 1 Loopback Configuration | 9-4 |
| | Loopback Procedure 2 for S/W Version 93.00.51 – 93.00.71 | 9-6 |
| | Stage 0 Loopback Configuration | 9-6 |
| | Stage 1 Loopback Configuration | 9-7 |
| | Stage 2 Loopback Configuration | 9-9 |
| | Stage 3 Loopback Configuration | 9-10 |
| | Loopback Procedure 3 for S/W Version 93.00.77 | 9-11 |
| | Stage 0 Loopback Configuration | 9-11 |
| | Stage 1 Loopback Configuration | 9-12 |
| | Stage 2 Loopback Configuration | 9-14 |
| | Stage 3 Loopback Configuration | 9-15 |
| | Loopback Procedure 4 for S/W Version 93.00.82 | 9-16 |
| | Stage 0 Loopback Configuration | 9-16 |
| | Stage 1 Loopback Configuration | 9-17 |
| | Stage 2 Loopback Configuration | 9-19 |
| | Stage 3 Loopback Configuration | 9-20 |
| | Stage 4 Loopback Configuration | 9-21 |
| | Loopback Procedure 5 for S/W Version 93.00.85+ | 9-22 |
| | Stage 0 Loopback Configuration | 9-22 |
| | Stage 1 Loopback Configuration | 9-23 |
| | Stage 2 Loopback Configuration | 9-25 |
| | Stage 3 Loopback Configuration | 9-26 |
| | Stage 4 Loopback Configuration | 9-27 |
| | Select No Delay | 9-28 |
| 10.0 | SETTING THE K-FACTOR | |
| | Setting the K-Factor | 10-1 |
| | Table 6 - Analog K-Factor Settings | 10-2 |
| | Table 7 - Digital K-Factor Settings (Matrix 0) | 10-3 |
| | Table 7 - Digital K-Factor Settings (Matrix 0) | 10-4 |
| | Table 7 - Digital K-Factor Settings (Matrix 0) | 10-5 |
| | Table 8 - Alternate Digital-K-Factor Setting (Matrix 1) | 10-6 |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: iv of vi

11.0 INSTALL DRAWINGS AND INSTALL KITS PARTS LISTS

| <u>Drawing No.</u> | <u>Description/Part Number</u> | <u>DATE</u> | <u>REV</u> |
|--------------------|---|-------------|------------|
| 4028-394 | Installation DWG, ADC2000, Digital Fuel Flow P/N 962830-1 | 3/21/05 | E |
| 4028-431 | Installation DWG, ADC2000, Sine Fuel Flow P/N 962830-2 | 3/21/05 | D |
| 4028-432 | Installation DWG, ADC2000, DC Fuel Flow P/N 962830-3 | 3/21/05 | D |
| 4028-005 | Installation, OAT Probe Assembly Kit P/N 681201-1 | 2/14/05 | C |
| 4028-395 | Installation, Mounting Tray, ADC2000 | 8/01/05 | C |
| 4070-005 | Installation, Serial to Argus 5000/7000 Converter P/N 937000-03 | 2/14/05 | B |
| 4028-423 | Installation Wiring, Fuel/Air Data Computer, ADC200/2000 to Fuel Systems | 3/11/03 | B |
| 4028-425 | Installation Wiring, Fuel/Air Data Computer (ADC2000) to OAT/Heading System | 5/17/07 | B |
| 4028-944 | Installation Wiring, Loop Back Harness for F/ADC200, 2000, D-Sub Connector | 9/19/05 | C |
| 4028-945 | Installation Wiring, ADC2000 to Nav Receivers with ARINC 429 | 3/11/03 | A |
| 4028-946 | Installation Wiring, F/ADC200, 2000 to Navigational Receivers with RS-422, RS-485 | 3/11/03 | A |
| 4028-947 | Installation Wiring, F/ADC200, 2000, Shadin Fuel Flow Indicators to Bendix/King Nav Receiver | 3/11/03 | A |
| 4028-948 | Installation Wiring, F/ADC200, 2000 and Shadin Converter to Eventide Argus | 2/14/05 | A |
| 4028-A80 | Label, ADC200/2000 Access Cover, P/N 712801 | 2/14/05 | A |
| 4028-A82 | Installation Wiring, ADC 2000, D-Sub Connector to Altimeter Baro Pot | 3/11/03 | C |
| 4028-B94 | Installation Wiring, F/ADC200, 2000, Shadin Fuel Flow Indicators to Garmin 430/530 | 4/29/11 | B |
| N/A | Parts List, OAT Probe Assembly Kit P/N 681201-1 | 4/6/07 | H |
| N/A | Parts List, Install Kit, ADC2000 P/N IK9630-1 | 6/4/07 | D |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: v of vi

11.0 INSTALL DRAWINGS AND INSTALL KITS PARTS LISTS (continued)

| <u>Drawing No.</u> | <u>Description/Part Number</u> | <u>DATE</u> | <u>REV</u> |
|--------------------------|---|-------------|------------|
| AIRCRAFT SPECIFIC | | | |
| 4028-818 | Installation Wiring, F/ADC 200/2000 w/Analog FF to Beech King Air Indicators D-Sub Connector | 3/11/03 | B |
| 4028-819 | Installation Wiring, F/ADC 200, 2000 Sine FF to Mitsubishi MU-300 and Model 400 Beechjet | 2/14/05 | B |
| 4028-909 | Installation Wiring, F/ADC-200(2000) to Mitsubishi MU-2 w/Foxboro PC-620 System | 2/14/05 | B |
| 4028-936 | Installation Wiring, F/ADC200, 2000 or DigiData with DC FF to Cessna Citation 500, 501, 550, S550, 551, 552 | 2/14/05 | A |
| 4028-937 | Installation Wiring, F/ADC200, 2000 or DigiData with DC FF to Cessna Citation 525 Jet | 2/14/05 | A |
| 4028-938 | Installation Wiring, F/ADC200, 2000 or DigiData with Digital FF to BomBardier LearJet 24, 25D | 1/17/05 | A |
| 4028-939 | Installation Wiring, F/ADC-200, 2000 with Sine FF to Rockwell Commander 690 and 695 | 2/14/05 | A |
| 4028-940 | Installation Wiring, F/ADC-200, 2000 or DigiData with DC FF to Raytheon Beechjet 400A Aircraft | 2/14/05 | A |
| 4028-941 | Installation Wiring, F/ADC-200, 2000 or DigiData with DC FF to Westwind 1124 Models | 2/14/05 | A |
| 4028-942 | Installation Wiring, F/ADC-200, 2000 to Fairchild SA226 Series Aircraft | 1/17/05 | A |
| 4028-943 | Installation Wiring, F/ADC-200, 2000 to Nav Receivers w/RS-232 | 1/17/05 | C |
| 4028-949 | Installation Wiring, F/ADC-200, 2000 to Aerospatiale AS365N2 Dauphin | 2/14/05 | A |
| 4028-950 | Installation Wiring, F/ADC-200, 2000 to Aerospatiale AS332 Super Puma | 2/14/05 | A |
| 4028-A29 | Installation Wiring, F/ADC-200, 2000 or DigiData with DC FF Piper Cheyenne PA31T | 1/17/05 | C |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: vi of vi

REVISION LOG

| REV | DATE | APP'D | CHANGE |
|-----|----------|-------|--|
| - | 6/8/95 | SES | Baseline release |
| A | 9/12/95 | SES | Miscellaneous updates |
| B | 6/9/97 | KCL | 4 Stage loop back procedure report to 4028C; Expand index |
| C | 6/13/97 | KCL | Correct manual rev |
| D | 6/23/97 | KCL | Revise limitations section |
| E | 1/8/98 | KCL | Miscellaneous updates, format change |
| F | 12/17/98 | KCL | Added new sections 5.9, 5.10, Switch 4 table page 9-10, Special Options page 9-11, updated table 1 page 10-2, updated Dwg 4028-944 and included Dwg's 4028-A29, 4028-A80, and 4028-A82, and new parts list IK9630-1 |
| G | 7/26/00 | EDJ | Added Bendix B & Garmin 430/530 Format G to page 9-7, Added one more Ragen Indicator / Transmitter to page 11-32. Added Garmin 430/530 to page 1-1. Added ARINC Label 234 & 235 to page 2-4. Changed OAT Install kit to 681201A-1 on page iii. Changed pages 11-11, -13, -16, -21, & -29. Added Allied Signal to page 2-5. Moved Raytheon Hawker HS-125-3A to page 2-9. Added 2 nd AN816 fitting to page 5-5. |
| H | 9/13/00 | EDJ | Changed page <i>iv</i> to reflect change to 4028-943. Page <i>iii</i> and 1-3 changed to include Dwg # 4028-B94. Page 2-1 changed for OAT tolerance, IVS to 10,000 fpm, and Pitot & IAS set to 20 knots for low speed. Page 2-4 and 2-5 changed to clarify configuration A parameters. Page 5-4 changed to include Sandel heading source. Page 9-1, 9-2, 9-6, and 9-7 changed to clarify software version usage. Page 9-11 moved to 9-16. Pages 9-11 to 9-15 added for Procedure 3. Page 5-1 changed to add TSO paragraph. |
| J | 11/03/00 | KCL | Add sections 2.8 and 2.9. Update sections 2.0, 5.1, 5.7 and 9.2. Moved page 9-16 to 9-21. Included updated Dwg 4028-A82. |
| K | 6/27/02 | EDJ | Corrected typo in section 1.3 system figure. Added 681201 OAT probe installation and parts list to page <i>iv</i> drawing list. Updated Page 2-4 ARINC table. Corrected page 10-3 Table 2. Added pages 9-21 to 9-26. Page 9-21 became 9-27. |
| L | 3/21/05 | WP | Changed "Shadin Company Inc." and "SCI" to "Shadin" everywhere. Updated rev levels of cited documents. Removed loopback procedure for S/W Version 93.00.79. From §2.5.3, removed unsupported ARINC 429 Label 247. From §11.0 Install Drawings and Install Kits Parts Lists, removed 4012-177 and PL, 681201A-1. Updated Aerosonic altimeter, 10420-11968E replacing 102220-1188. |
| M | 9/20/05 | ZK | Updated 4028-395, 4028-944, IK9630-1 Parts List, and section 2.2. Corrected pages 5-1 and 10-5 |
| N | 7/25/06 | CB | Updated company logo & formatting |
| P | 6/04/07 | DU | Added tolerance tables for IAS, TAS, PALT, IVS, and MACH Number in Section 2.2, updated ARINC Label Configuration Table in Section 2.5.2, added Software Certification Level to Part Numbering Scheme in Section 2.7, updated Certification Section 3.0, added Loopback Procedure 5 for S/W Version 93.00.87+, added Pin 11 to DWG No. 4028-425, and updated 681201-1 & IK9630-1 Parts Lists. Released by ERN # 0703/007. |
| R | 6/19/07 | RJW | Added Antonov and Yak-40 SSEC information in Section 2.6.4. Corrected True & Magnetic heading text from °C to ° in Section 2.2. Changed software 93.00.87 & above to 93.00.85 & above in Sections 2.7 and Loopback Procedure 5 in section 9.2. |
| S | 5/6/11 | ZK | Updated Dwg 4028-B94 |
| T | 10/11/21 | ZK | Corrected SAT and TAT description on pages 2-5 and 2-6. Updated company address. |

The information in this manual is subject to change without notification. To ensure complete and current updates, note the Revision Log above and call Technical Assistance for updated information.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 1-1

1.0 OVERVIEW**1.1 The Manual**

This manual is designed to facilitate the installation of the Shadin Fuel/Air Data Computer (ADC 2000).

1.2 Product Information

The Shadin ADC 2000 system is designed to provide a **combined** source of fuel and air data. Listed below are the navigational systems that the ADC 2000 has been designed to be compatible with.

Receives Serial Data from:

Magellan
Skynav 5000

Avidyne
440, 540

ARNAV
STAR 5000
FMS 7000
R5000

Trimble
2000/2000A
2100/3000
3100/2101

Bendix King
KLN90
KLN90A
KLN90B
KLN89/89B

Garmin
150, 155, 155XL, 165
230, 230XL
300, 300XL
430/530
650/750

BFGoodrich
Pronav LNS 6000

IIMorrow
611, 612, 618
NMS 2001
800, 820, 360
GX50, 55, 60

Transmits Serial Data to:

ARNAV Magellan
Bendix/King Trimble
Garmin

Note: To find out which particular receiver models have Air Data receive capability, contact the manufacturers.

Transmits ARINC Data to:

ASINC Bendix King
Airshow EFIS 40/50

Honeywell
SPZ-5000

Universal
UNS-1M
Data Nav III

Global
GNSX
GNS-Xls

Trimble
TNL8100

IIMorrow
2101

Garmin
430/530
650/750


INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 1-2

1.3 System Configuration

The Fuel/Air Data system is a remote mounted box which is connected to the GPS receiver via serial data and standard ARINC 429 output. It is, also, connected to the pitot and static line, OAT probe, fuel flow sensors and the aircraft heading source. In addition, optional barometric information may be received from the aircraft altimeter, if available.

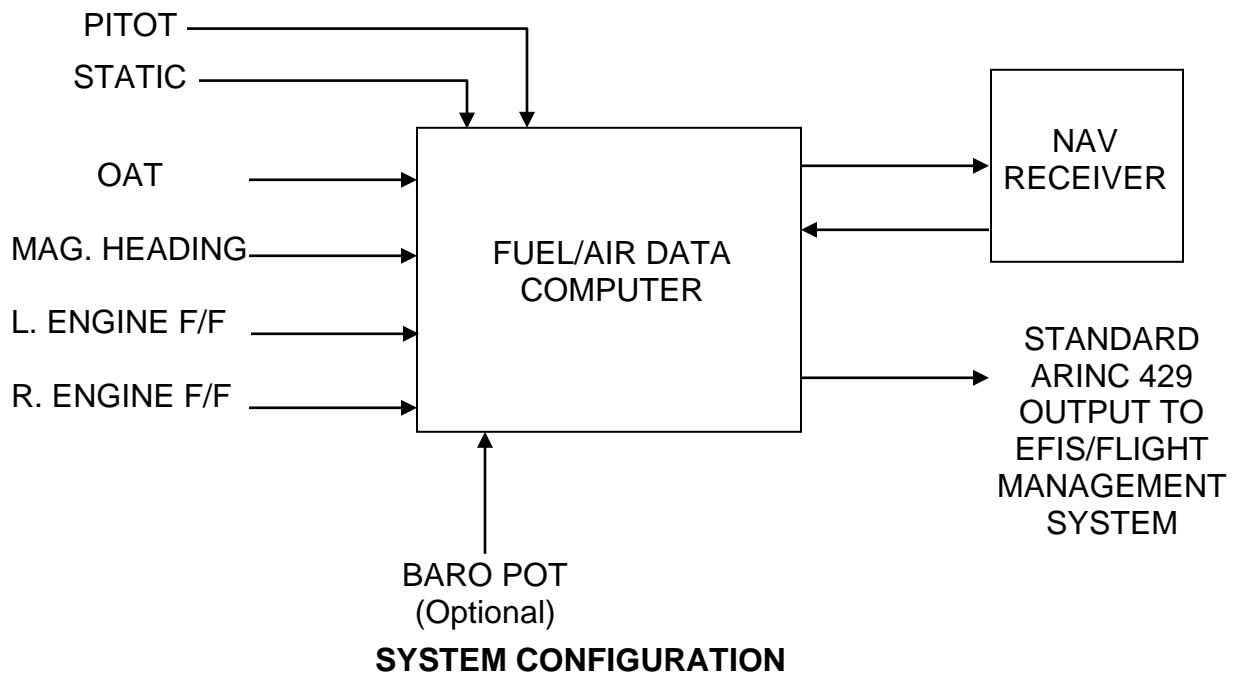


INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 1-3


1.4 Fuel Totalizer Configuration

Shown below is an optional system configuration utilizing a Shadin Fuel Flow Indicator. Note that the only navigational receivers supported in this configuration are the Bendix/King KLN and Garmin 430/530 series. Consult Drawing Number 4028-947 contained in this manual for installation information for the Bendix/King KLN series. Consult Drawing Number 4028-B94 for installation information for the Garmin 430/530.

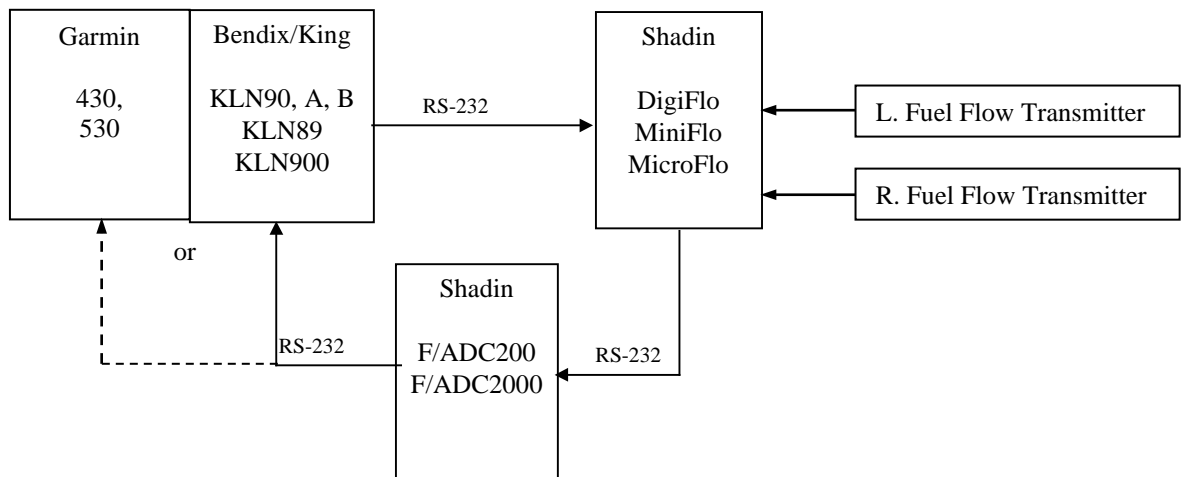

1.5 F/ADC2000, Argus Moving Map Configurations.

Shown below is the system configuration that supports output to an Eventide Argus moving map using the Shadin serial to serial data converter P/N 937000-03. The fuel and Air Data are displayed on the Eventide-Argus moving map. Consult Drawing numbers 4070-005 and 4028-948 contained in section 11.

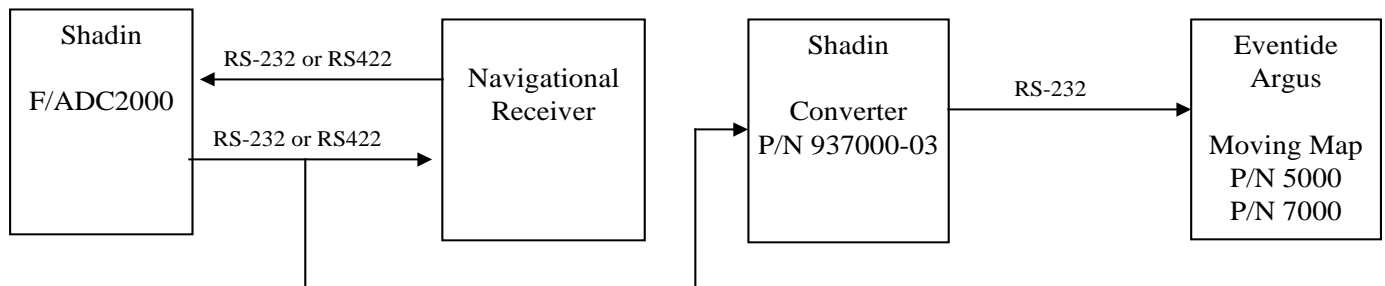

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-1

2.0 FUEL AND AIR DATA SYSTEM SPECIFICATIONS

2.1 Input Data Range

| | |
|-----------|------------------------------|
| Pitot | 20 to 350 kts. |
| Static | -1000 to 55,000 ft. |
| OAT | -60°C to +60°C |
| Heading | 0 - 360° |
| Fuel Flow | 1 to 450 GPH Range Selected |
| K-Factor | 500 to 130000 PPG Continuous |

2.2 Output Data Range

| <u>PARAMETER</u> | <u>Accuracy</u> | <u>RANGE</u> |
|------------------|-----------------|--------------------|
| IAS | Table 1 | 20 to 350 kts. |
| P.ALT | Table 2 | -1000 to 50000 ft. |
| OAT | ±1.5°C per TSO | -60°C to +60°C |
| TRUE HEADING | ±2° | 0 - 360 degrees |
| MAGNETIC HEADING | ±1° | 0 - 360 degrees |
| IVS | Table 3 | ± 10,000 ft./min. |
| TAS | Table 1 | 20 - 600 kts. |
| MACH | Table 4 | .2 - .95 |
| WIND SPEED | ±5 kts. | 5 - 360 kts. |
| WIND DIRECTION | ±10° | 0 - 360 degrees |
| FUEL FLOW | ±2% | 1 - 450 GPH |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-2

This table is used as the tolerance for both IAS and TAS. For values between table rows, linearly interpolate between the adjacent table points.

| AIRSPPEED KNOTS | TOLERANCE ± KNOTS |
|----------------------------|------------------------------|
| 50 | 5.0 |
| 80 | 3.0 |
| 100 | 2.0 |
| 120 | 2.0 |
| 150 | 2.0 |
| 200 | 2.0 |
| 250 | 2.4 |
| 300 | 2.8 |
| 350 | 3.2 |
| 400 | 3.6 |
| 450 | 4.0 |

Table 1 - Calibrated Airspeed Tolerance

This table is used as the tolerance for pressure altitude. Note that for an altitude between points in the tables, the tolerance is linearly interpolated between the adjacent table points.

| ALTITUDE FEET | TOLERANCE ± FEET |
|--------------------------|-----------------------------|
| 0 | 25 |
| 1000 | 25 |
| 2000 | 25 |
| 3000 | 25 |
| 4000 | 25 |
| 5000 | 25 |
| 8000 | 30 |
| 11000 | 35 |
| 14000 | 40 |
| 17000 | 45 |
| 20000 | 50 |
| 30000 | 75 |
| 40000 | 100 |
| 50000 | 125 |

Table 2 -Pressure Altitude Tolerance

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-3

This table is used as the tolerance for vertical speed. For values between table rows, linearly interpolate between the adjacent table points.

| VERTICAL SPEED FPM | TOLERANCE ± FPM |
|-----------------------------------|----------------------------|
| 20000 | 1000 |
| 6000 | 300 |
| 4000 | 200 |
| 2000 | 100 |
| 1000 | 50 |
| 500 | 45 |
| 200 | 45 |
| 100 | 45 |
| 50 | 45 |
| 0 | 45 |
| -50 | 45 |
| -100 | 45 |
| -200 | 45 |
| -500 | 45 |
| -1000 | 50 |
| -2000 | 100 |
| -4000 | 200 |
| -6000 | 300 |
| -20000 | 1000 |

Table 3 - Vertical Airspeed Tolerance

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-4

This table is used as the tolerance for MACH Number. For values between table rows, linearly interpolate between the adjacent table points.

| ALTITUDE | TOLERANCE | |
|----------|-----------|--------|
| | MACH | ± MACH |
| 0 | .3 | .012 |
| | .4 | .012 |
| | .5 | .010 |
| | .6 | .0075 |
| 10,000 | .4 | .012 |
| | .5 | .010 |
| | .6 | .0075 |
| | .7 | .005 |
| 20,000 | .4 | .012 |
| | .5 | .010 |
| | .6 | .0075 |
| | .7 | .005 |
| 30,000 | .6 | .0075 |
| | .7 | .005 |
| | .80 | .005 |
| | .90 | .005 |
| | .95 | .0075 |
| 40,000 | .70 | .005 |
| | .80 | .005 |
| | .90 | .005 |
| | .95 | .0075 |
| 50,000 | .75 | .005 |
| | .90 | .005 |
| | .95 | .0075 |
| | 1.00 | .015 |

Table 4 - MACH Tolerance

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-5

2.3 Dimensions (including mounting rack)

Size: 7.4" L x 4.3" H x 3.9" W

Weight: 36 oz.

2.4 Power Requirements

System Power required: 28 VDC @ 1300 mA 14 VDC @ 900 mA

2.5 Output Data

1. Electric Format: RS-422 or RS-232
2. ARINC 429 low speed

See paragraph 2.5.3 for ARINC 429 output data capabilities.

2.5.1 Serial Output Data Parameters

Fuel Group

Left Fuel Flow
 Right Fuel Flow
 Fuel Used Total
 Total Fuel Used
 Fuel Used Right
 Fuel Used Left
 Fuel Remaining*

Air Data Group

| | |
|------------------------------|--------------------|
| Aircraft Type | Density Altitude |
| MACH Number | Drift Angle |
| True Air Speed (TAS) | Magnetic Heading |
| Indicated Air Speed (IAS) | Baro Pressure |
| Wind Direction and Speed | Baro Corrected Alt |
| Vertical Speed | Pressure Altitude |
| Static Air Temperature (SAT) | Rate of Turn |
| Total Air Temperature (TAT) | |

*Only present with Digiflo input.

Note: Not all parameters will be available to all navigational receivers. Contact the manufacturer for display capabilities.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-6

2.5.2 ARINC 429 Labels Associated with Switch Settings

In Table 5 – ARINC Label Configuration below, the heading row containing the numbers 1-A indicates the setting of the ARINC rotary switch on the back of the unit. The number in the cell at the intersection of an ARINC switch setting and an ARINC label number is the repeat time in msec for that label. Zero indicates that the label is not generated with that switch setting. Tolerance on the rate is $\pm 10\%$ averaged over one second.

| LABEL | Description | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A |
|-------|-------------------------------|------|-----|----|-----|------|------|-----|-----|-----|----|----|
| 074G | Flight Plan Header | 1000 | 0 | 0 | 0 | 1000 | 1000 | 0 | 0 | 0 | 0 | 0 |
| 075G | Active Waypoint To/From | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 100 | Selected Course | 0 | 0 | 0 | 200 | 200 | 200 | 200 | 0 | 0 | 0 | 0 |
| 113G | Waypoint Group Checksum | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 114 | Desired Track (True) | 50 | 0 | 0 | 50 | 50 | 50 | 50 | 0 | 0 | 0 | 0 |
| 115 | Waypoint Bearing (True) | 50 | 0 | 0 | 50 | 50 | 50 | 50 | 0 | 0 | 0 | 0 |
| 116 | Cross Track Distance | 50 | 0 | 0 | 50 | 50 | 50 | 50 | 0 | 0 | 0 | 0 |
| 147G | Magnetic Variation | 200 | 0 | 0 | 200 | 200 | 200 | 200 | 0 | 0 | 0 | 0 |
| 203 | PALT (1013.25 mB) | 0 | 200 | 50 | 200 | 0 | 200 | 200 | 200 | 100 | 50 | 50 |
| 204 | PALT (Baro Corrected) | 0 | 200 | 50 | 200 | 0 | 0 | 200 | 200 | 100 | 50 | 50 |
| 205 | MACH | 0 | 200 | 50 | 200 | 0 | 200 | 200 | 200 | 0 | 0 | 0 |
| 206 | Indicated Airspeed (IAS) | 0 | 0 | 50 | 200 | 0 | 0 | 200 | 200 | 100 | 50 | 50 |
| 210 | True Airspeed | 100 | 100 | 0 | 100 | 0 | 100 | 100 | 100 | 100 | 50 | 50 |
| 211 | Total Air Temperature (TAT) | 0 | 200 | 0 | 200 | 0 | 0 | 200 | 200 | 0 | 0 | 0 |
| 212 | Vertical Speed (IVS) | 0 | 200 | 50 | 200 | 0 | 0 | 200 | 200 | 0 | 50 | 50 |
| 213 | Static Air Temperature (SAT) | 0 | 200 | 0 | 200 | 0 | 200 | 200 | 200 | 100 | 0 | 50 |
| 244 | Total Fuel Flow | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 100 | 0 | 0 | 0 |
| 251G | Distance To Go | 200 | 0 | 0 | 200 | 200 | 0 | 200 | 0 | 0 | 0 | 0 |
| 252 | Time To Go | 200 | 0 | 0 | 200 | 200 | 0 | 200 | 0 | 0 | 0 | 0 |
| 275G | LRN Status Word | 200 | 200 | 0 | 200 | 200 | 200 | 0 | 0 | 0 | 0 | 0 |
| 300 | Navigation Aid Info | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 303G | Waypoint Group Header | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 304G | Message ID Characters 1-3 | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 305G | Message ID Characters 4-6 | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 306G | Waypoint Latitude | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 307G | Waypoint Longitude | 100 | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 |
| 310 | Present Latitude | 200 | 0 | 0 | 200 | 200 | 200 | 200 | 0 | 0 | 0 | 0 |
| 311 | Present Longitude | 200 | 0 | 0 | 200 | 200 | 200 | 200 | 0 | 0 | 0 | 0 |
| 312 | Ground Speed | 50 | 0 | 0 | 50 | 50 | 50 | 50 | 0 | 0 | 0 | 0 |
| 313 | True Track | 0 | 0 | 0 | 200 | 200 | 200 | 200 | 0 | 0 | 0 | 0 |
| 314 | True Heading | 0 | 0 | 0 | 100 | 100 | 0 | 100 | 0 | 0 | 0 | 0 |
| 315 | Wind Speed | 100 | 100 | 0 | 100 | 100 | 100 | 100 | 0 | 0 | 0 | 0 |
| 316 | Wind Direction (True) | 100 | 100 | 0 | 100 | 100 | 100 | 100 | 0 | 0 | 0 | 0 |
| 320 | Magnetic Heading | 0 | 100 | 0 | 100 | 100 | 0 | 100 | 0 | 0 | 0 | 0 |
| 321 | Drift Angle | 50 | 50 | 0 | 50 | 50 | 0 | 50 | 0 | 0 | 0 | 0 |
| 347 | Left/Right Fuel Flow | 200 | 200 | 0 | 200 | 200 | 0 | 200 | 200 | 200 | 0 | 0 |
| 351G | Distance to Final Destination | 0 | 0 | 0 | 0 | 0 | 200 | 0 | 0 | 0 | 0 | 0 |
| 352G | Time to Final Destination | 0 | 0 | 0 | 0 | 0 | 200 | 0 | 0 | 0 | 0 | 0 |
| 371 | Equipment ID | 0 | 0 | 0 | 0 | 0 | 200 | 0 | 0 | 0 | 0 | 0 |

Table 5 – ARINC Label Configuration

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-7

2.5.3 ARINC 429 Labels Associated with Switch Settings

- 0 - Honeywell SPZ-5000 for Cessna
- 1 - Bendix KLN90B or Global GNSXC(LS)
- 2 - HUD-Heads Up Display for Flt Visions
- 3 - UNS1
- 4 - EFIS40/50
- 5 - ASINC Airshow Cabin Display
- 6 - Trimble 8100 (No label 275)
- 7 - TNL-8100
- 8 - Collins FMS 800 (100 ms rate)
- 9 - Mk VII GPWS (50 ms rate)
- A - Mk VI & VIII (50 mSec rate)

Note that 3 and 6 are the same except for label 275.

The following is a list of the different switch settings that the ARINC switch may be set to. The ARINC switch position is shown in section 9.2.

- 0 - Long Range Nav function of Honeywell SPZ-5000 Flight Guidance/EFIS System installed on the Cessna Citation Jet Aircraft.
- 1 - Bendix to Global/Cabin Info System installed on the Cessna Citation Jet Aircraft.
- 2 - Reserved
- 3 - 8100, UNS1
- 4 - Bendix/King EFIS 40/50
- 5 - ASINC Airshow
- 6 - 8100, UNS1, except no label 275. Use when there is no serial navigation data being received by the ADC2000.
- 7 - TNL-8100, with total fuel flow label 244
- 8 - Collins FMS 800
- 9 - Allied Signal, Mk VII GPWS (50 ms rate)
- A* - Allied Signal, Mk VI & VIII (50 ms rate)

* for ARINC software version 71.73.01 and up

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-8

2.6 Limitations

2.6.1 Warm-up time

The Fuel/Air Data System requires a warm-up time that varies with ambient temperature:

| | |
|---------------|-----------------------------|
| 70°C ambient | 5 minutes warm-up required |
| 15°C ambient | 10 minutes warm-up required |
| -20°C ambient | 15 minutes warm-up required |
| -40°C ambient | 20 minutes warm-up required |

If the ADC has been configured for a fuel flow delay, fuel flow and thus fuel used information shall be unavailable at startup for the duration of the selected delay.

2.6.2 Supplemental equipment

All Shadin F/ADC(s) and ADC(s) are not designed to replace factory installed Air Data fuel flow systems or other gauges. They are not intended to be used as a primary system to drive altimeters or airspeed indicators. The F/ADC fuel section is not a fuel quantity system and therefore reports only what was manually entered by the operator.

2.6.3 Static Source Error Correction (SSEC), Pitot Source Error Correction (PSEC)

For certain models of aircraft, the Fuel/Air Data System will make corrections to pressure altitude by compensating for static source error. For some of these models, the Fuel/Air Data System will make corrections to indicated airspeed by compensating for pitot source error.

The System does not provide true and absolute readings for all circumstances. It makes no altitude corrections when the uncorrected IAS is below 100 knots, and it makes no airspeed corrections when the uncorrected IAS is below 150 knots. It does not account for other factors, such as the current useful weight, that contribute to static source error and pitot source error. Rather, the Fuel/Air Data System performs calculations based solely on indicated airspeed and pressure altitude. The SSEC / PSEC corrections were derived from specific aircraft data referred to in section 2.6.4. To configure the Shadin F/ADC for a specific aircraft model refer to section 9.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-9

2.6.4 SSEC/PSEC LISTING**Antonov An-12 (SSEC only)**

Airplane Flight Manual, An-12, Sect. 1 General Information Page 9
 1991, MCA USSR Subsect. 1.5. S&DSECs
 approved 02/05/1992

Antonov An-24 (SSEC only)

Airplane Flight Manual, An-24, Sect. 6 Flight Characteristics Page 81
 2001, Ukrainian SAA Subsect. 6.7 S&DSECs
 approved 03/29/2002

Antonov An-26 (SSEC only)

Airplane Flight Manual, An-26, Sect. 6 Flight Characteristics Page 53
 2001, Ukrainian SAA Subsect. 6.10 S&DSECs
 approved 03/29/2002

Antonov An-30 (SSEC only)

Airplane Flight Manual, An-30, Sect. 6 Airplane Characteristics Page 31
 1982, MCA USSR Subsect. Flight Characteristics
 approved 12/25/1979

Beechcraft Beechjet-400 (SSEC only)

Airplane Flight Manual, BeechJet 400, Section 6, Performance Page 6-14
 FAA approved 1/86 Altitude Correction Figure 6-8
 Revision A9 14/92 Copilot System

Boeing 707-321B Advanced**SSEC**

Airplane Flight Manual, Boeing 707, Section IV, Performance Page 19
 FAA approved 3/27/69, D6-1588 Altitude Calibration FLAPS UP
 Revision 2/4/69 Pilot & Copilot

PSEC

Airplane Flight Manual, Boeing 707, Section IV, Performance Page 18
 FAA approved 9/20/66, D6-1588 Airspeed Calibration FLAPS UP
 Pilot & Copilot

Cessna 500 (SSEC only)

Airplane Flight Manual, Cessna/Citation Model 500, Section IV, Performance
 FAA approved Aug 7/74 Altitude Correction Figure 4-7
 Revision 53 - Dated 11 Dec 85 Pilot & Copilot system Page 4-17.1

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-10

SSEC/PSEC LISTING (Continued)

Cessna 501 (SSEC only)

Airplane Flight Manual, Cessna/Citation I SP Model 501, Section IV, Performance

FAA approved Altitude Correction Figure 4-5

Original Pilot & Copilot system Page 4-15

NOTE: Uses same Hardware configuration as Cessna 500

Cessna 525 (SSEC only)

Airplane Flight Manual Model 525

Altitude Correction Rept FT525-4

Pilot & Copilot system Page 47

Cessna 550 (SSEC only)

Airplane Flight Manual, Cessna/Citation II Model 550, Section IV, Performance

FAA approved Altitude Correction Figure 4-5

Original Pilot & Copilot system Page 4-15

Cessna 560 (SSEC only)

Airplane Flight Manual, Model 560, S/N 259 & Below, Section IV, Performance

FAA approved Altitude Correction Figure 4-5

Original Pilot & Copilot system Page 4-17

Cessna 560 (SSEC only)

Airplane Flight Manual, Model 560, S/N 260 & Up, Section IV, Performance

FAA approved Altitude Correction Figure 4-5

56FMA-00 Pilot & Copilot system Page 4-19

Cessna Citation S550 (SSEC only)

Airplanes -0115 through -0160 Except Airplanes Incorporating SBS550-32-7 and Airplanes -0001 through-0114 Incorporating SBS550-32-1 but not SBS550-32-7.

Section IV - Performance, Standard Charts Pages 4-17, 4-18

FAA approved Altimeter Position Correction Figure 4-5

Revision 37 Pilot & Copilot

Douglas DC-8

SSEC

Airplane Manual, Douglas DC-8, Section IV, Performance Page 20

FAA approved Altitude Correction

DAC-33161 10/1/66 Pilot & Copilot system

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-11

SSEC/PSEC LISTING (Continued)

PSEC

| | |
|--|------------------------|
| Airplane Manual, Douglas DC-8, Section IV, Performance | Page 11 |
| FAA approved | Airspeed Correction |
| DAC-33161 10/1/66 | Pilot & Copilot system |

Falcon 10 (SSEC only)

| | |
|--|-----------------|
| Airplane Flight Manual, Section 6. Performance, 7 Position Error | Page 6-27 |
| FAA approved 10/17/73 | Position Error |
| Revision 14, 6/6/78 | Pilot & Copilot |

Falcon 20-C, D, E (SSEC only)

| | |
|--|---------------------|
| Maintenance Instruction Manual, 34-18-03 | Page A48 |
| Sept 1/77 | Altitude Correction |
| CS-143 | Copilot system |

Falcon 20-F (SSEC only)

| | |
|--|---------------|
| Maintenance Instruction Manual, 34-18-03 | Section 5 |
| DTM30528 | Subsection 20 |
| DGAC Approved | Page 4 |

Falcon 50

SSEC

| | |
|--|---|
| Airplane Flight Manual, Section 5. Performance | Page 5.25.2 |
| DGAC approved | Copilot (for A/C equipped with one ADC) |
| Revision 24 | |

PSEC

| | |
|--|--|
| Airplane Flight Manual, Section 5. Performance | Page 5.25.2 |
| DGAC approved | Pilot (normal) and Copilot MACH Indicators |
| Revision 24 | |

LearJet 24 (SSEC only)

| | |
|--|------------------------|
| Airplane Manual, LearJet Model 24, Section IV, Performance | |
| FAA approved 3/17/66 | Altitude Correction |
| Revised 7/19/68 | Pilot & Copilot system |
| | Figure 4-10 |
| | Page 4-16 |

LearJet 25D (SSEC only)

| | |
|---|---------------------|
| Airplane Manual, LearJet 25D/F AFM, Performance | |
| FAA approved 10/14/86 | Altitude Correction |
| FM-018 Release A | Copilot system |
| | Figure 5-10 |
| | Page 5-18 |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-12

SSEC/PSEC LISTING (Continued)

LearJet 35 (SSEC only)

| | |
|---|---|
| Flight Manual, LearJet 35, Normal System, Flaps up, Gear up | Page 5-18 |
| FAA approved, 4/30/76 | Altitude Position Correction Figure 5-10 |
| Reissued 2/25/81 | Pilot's Altimeter- STBY & Copilot's Altimeter |

LearJet 55 (SSEC only)

| | |
|--|--|
| Gates LearJet 55, APM, Performance Data, Flaps up, Gear up | Page 5-20 |
| FAA approved, 3-17-81 | Altitude Position Correction Figure 5-11 |
| Change 13 | |

Lockheed Jetstar (SSEC only)

| | |
|---|---|
| Airplane Flight Manual, Performance Data, Weight = 32,000 Lbs., Clean Configuration: Leading Edge Flaps up, Trailing Edge Flaps up, Landing Gear up | Page 4-25 |
| FAA approved, 12/14/76 | Altimeter Installation Correction Figure 4-15 |

Mitsubishi MU-300 (SSEC only)

| | |
|--|--------------------------------|
| Airplane Flight Manual, Diamond IA, Section 6, Performance | |
| FAA approved Jan 11/84 | Altitude Correction Figure 6-8 |
| | Copilot system Page 6-20 |

Raytheon Hawker HS-125-3A (SSEC only)

| | |
|-----------------------|----------------------------------|
| Airplane Manual, | Section 5 |
| Document No. H.S.1.10 | Static Position Error Figure 5-4 |
| CAA Approved | Correction to Altimeter Page 13 |

Raytheon Hawker HS125-700A (SSEC only)

| | |
|--|-----------------|
| 125 Crew Manual, First Officer, Section 2, Flaps Retracted | Page 2-30 |
| | Static Position |
| Correction to Altimeter | Figure 6 |
| Revision :G, 4/77 | |

Sabreliner 60 (SSEC only)

| | |
|--|---------------------------------|
| Sabreliner Pilot's Manual, SR 75-064, Weight = 16,000 Lbs. | |
| 9/1/76 | Altitude Calibration Figure 7-2 |

Sabreliner 65 (SSEC only)

| | |
|--------------------------|---|
| Pilots Manual, SR-78-028 | |
| | Altitude Correction Figures 7-1 through 7-5 |
| | Pilot & Copilot system 265-65-7-31,32A,33 |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-13

SSEC/PSEC LISTING (Continued)**Westwind 1124A (SSEC only)**

Airplane Flight Manual, 1124A , Section V, Performance

CAA approved

Altitude Correction

Figures 5-13, Flaps 0

Copilot system

Pages V-25

NOTE: Gross Weight averaged at 18,750 lbs.

Yak-40 (SSEC only)

Airplane Flight Manual, Sect. 7.1.3.

Page 7

Yak-40, 1995


Altitude correction

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-14

2.7 Part Numbering Scheme

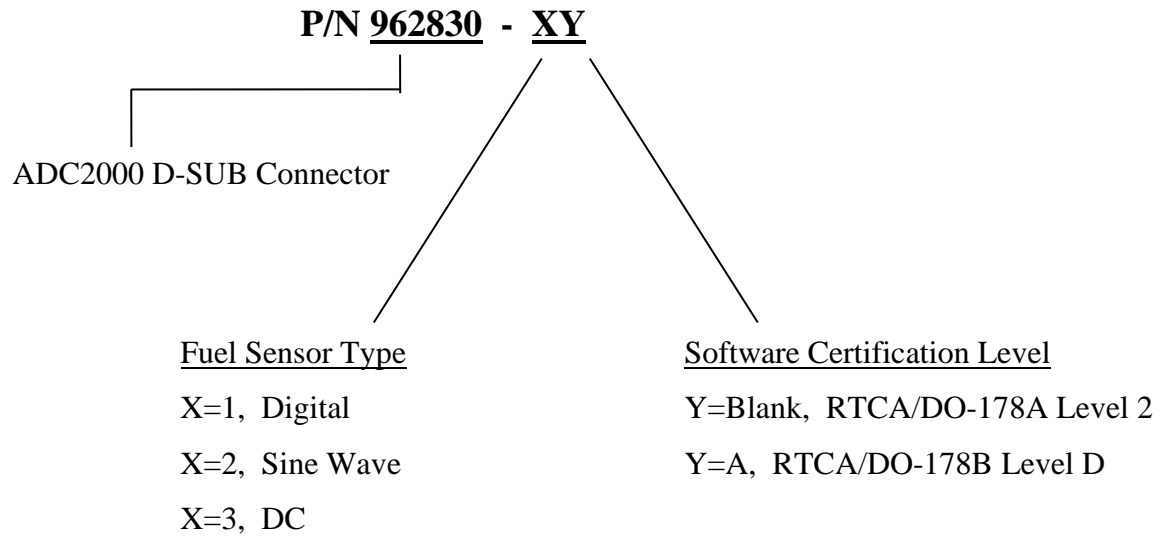

Note: In Section 11, the Part Numbers 962830-1, 962830-2, and 962830-3 are identical to their corresponding Part Numbers with an A suffix (software versions 93.00.85 and above) except for their Software Certification Level and additional five SSEC corrections.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-15

2.8 Electrical Interface Specifications

The specifications for the interfaces heading, fuel flow and baro are listed in this section.

2.8.1 Heading Interface

The heading interface follows the ARINC 407 standard (line voltage of 11.8 Vrms).

| Synchro Leg | Input Impedance |
|-------------|-----------------|
| H | 10 kohm |
| X | 17 kohm |
| Y | 17 kohm |

2.8.2 Fuel Flow Interfaces

There are three basic types of fuel flow interfaces supported. The interface type is defined in the ADC2000 part number. Refer to section 2.7 for the part numbering scheme.

2.8.2.1 Digital Fuel Flow Interface

There are two possible installations for the digital fuel flow interface, the first is that the ADC is connected to a dedicated fuel flow transmitter, and the second is that the ADC is connected into a fuel flow system.

Dedicated Transmitter

Fuel Flow Interface Input Impedance 47 kohm

Shared Transmitter

Under normal operating conditions the voltage swing (the signal amplitude) can be calculated using $V_s = [R/(R + 47 \text{ k})] * 5 \text{ Vdc} - 0.5 \text{ Vdc}$, where R is the input impedance of the aircraft fuel flow indicator.

For example with an input impedance $R = 1 \text{ Mohm}$, the voltage swing $V_s = 4.27 \text{ Vdc}$

With the fuel flow information encoded in frequency and not amplitude, the loading effects do not produce an error provided the aircraft indicator can detect the signal transitions.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-16

2.8.2.2 Sine Wave Fuel Flow Interface

The interface source signal amplitude varies with frequency. Listed in the table below are the input impedance vs. peak to peak input voltages of the ADC2000 under normal operating conditions.

| Input Impedance | Input Voltage |
|-----------------|---|
| 2 Mohm | Input voltage less than or equal to 1.0 Vpp |
| 24.5 kohm | Input voltage greater than 1.0 Vpp |

Maximum Input Voltage

10 Vpp

2.8.2.3 DC Voltage Fuel Flow Interface

The DC voltage fuel flow interface has a differential input. The specifications under normal operating conditions are listed below.

Positive input

greater than 100 Mohm

Negative input

greater than 100 Mohm

Maximum Input Voltage

10.2 Vdc

2.8.3 Baro Interface

The baro interface requires a three-wire connection to the potentiometer housed in the aircraft altimeterⁱ. The three connections are the high side, low side and wiper. The specifications under normal operating conditions are listed below.

Input Impedance high side

greater than 100 Mohm

Input Impedance low side

greater than 100 Mohm

Input Impedance wiper

greater than 100 Mohm

Maximum Input Voltage

± 12 Vdc

ⁱ The altimeters supported are listed in section 9.2 and are dependent upon the ADC2000 software version level.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 2-17

2.9 Statistical Specifications

2.9.1 Mean Time Between Failures

MTBF: 17,660 hours

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 3-1

3.0 CERTIFICATION

TSO-C106, -C44b (Incomplete System)

Environmental Categories RTCA/DO-160B

| | |
|-------------------------------|------------------|
| Temp. ALT | F2 |
| Temp. Variation | B |
| Humidity | A |
| Shock & Vibration | P, K, S, M, N, O |
| Magnetic Effect | B |
| Power Input | B |
| Voltage Spike | B |
| AF Conducted Susceptibility | B |
| Induced Signal Susceptibility | B |
| RF Susceptibility | A |
| RF Emission | B |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 4-1

4.0 PLACING AN ORDER

Please know the aircraft year and model number, its serial number, and the engine make and model number when you call to place orders. Information on the fuel flow system previously installed in the aircraft and any communication interface (RS-232, RS-422 and ARINC 429) information may also prove useful.

We may request a wiring diagram of the aircraft's fuel flow system and transducer and/or K-factors.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 5-1

5.0 INSTALLATION PROCEDURE

5.1 General

The conditions and tests required for TSO approval of this article are minimum performance standards. It is the responsibility of those installing this article either on or within a specific type or class of aircraft to determine that the aircraft installation conditions are within the TSO standards. TSO articles must have separate approval for installation in an aircraft. The article may be installed only if performed under 14 CFR part 43 or the applicable airworthiness requirements.

All work must conform to AC 43.13-1B or later.

5.2 F/ADC Location Selection

The Fuel Air Data Computer should be mounted in a dry, temperature stable location with enough distance from motors, pulse generating equipment, relays and cables carrying high DC or AC current to avoid interference with low level signals of the OAT and fuel flow. Refer to aircraft specific installation drawings, if available, for correct installation location.

The equipment may be installed in non-pressurized and non-controlled temperature locations.

In considering the location, keep in mind that the F/ADC requires signals from the fuel flow, the OAT probe, heading system and the pitot and static lines. Placement in the front section of the aircraft is favorable, in order to avoid running all of these signals to the tail of the aircraft.

5.3 Mounting the F/ADC

The computer should be mounted per Drawings 4028-394, -431, -432, and -395, using the recommended hardware. Any orientation is acceptable. Make sure that the computer is not the lowest point in the pitot and static system, to reduce the chances of collecting moisture or water in it. Form a water trap, if necessary.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 5-2

5.4 Mounting the OAT Probe

1. Refer to Drawing 4028-005 and OAT Probe Assy Kit P/N 681201-1. Use the supplied stiffener to support the probe. Keep the probe away from transmitting antennas and static ports of autopilots to avoid interference.
2. +5V is supplied to the OAT probe from (red wire) J1:15 for P/N 962830-XY. The OAT signal is the white wire from J1:14 for P/N 962830-XY. The lead wire to the computer should be shielded and terminated at the ADC2000 only.
3. The sun shield must be installed for proper indication of OAT.
4. For single engine installation, avoid mounting the OAT probe on the belly of the aircraft to avoid erroneous reading due to the presence of hot exhaust gases.
5. Below is an OAT to °C temperature conversion chart for use if testing the OAT.

| OAT °C | Input μA | | OAT °C | Input μA | | OAT °C | Input μA | | OAT °C | Input μA |
|--------|----------|--|--------|----------|--|--------|----------|--|--------|----------|
| -60 | 213 | | -20 | 253 | | +20 | 293 | | +60 | 333 |
| -50 | 223 | | -10 | 263 | | +30 | 303 | | | |
| -40 | 233 | | 0 | 273 | | +40 | 313 | | | |
| -30 | 243 | | +10 | 283 | | +50 | 323 | | | |

1°C = 1 μA

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 5-3

5.5 Connection to the Fuel Flow Sensor

1. If the aircraft is not equipped with a fuel flow source, refer to the STC covering the installation of the fuel flow transducer on the engine.
 2. When connecting to any fuel transducer, Shadin recommends using a 3 conductor, 22 gauge, shielded wire with the shield terminated at the Air Data only.
 3. Note that for single engines all fuel flow types should use left side inputs only.
 4. *Install the transducers according to the engine STC, using Drawing 4028-423 (Freq. Option) to connect the fuel flow transducer to the computer.
 5. *If the aircraft is equipped with a digital fuel flow transducer (P/N 680501), use Drawing 4028-423 (High-Level Option) and the STC drawing covering the installation.
 6. Before hooking to an existing fuel system in a turbine or jet application, consult all installation drawings contained in this manual.
 7. *If the aircraft is equipped with a DC fuel flow system, use Drawing 4028-423 (DC Fuel Flow Option) and the STC covering the installation.
 8. *If the aircraft is equipped with a sine wave pickup coil type of fuel flow transducer, use Drawing 4028-423 (Sine Wave Signal). Use the Converter, P/N 631201. Note that if this is a new installation, use part number 962830-2Y ADC2000.
 9. Install the sine to square converter, P/N 631201, between the fuel flow transducer and the F/ADC as indicated on the drawings.
 10. Make sure that the system is initialized with the proper transducer K-factor for a digital or sine system and with the proper airframe make and model for the DC fuel flow system. See the attached tables in section 10.0.
- * Consult section 11 for specific aircraft installation wiring drawings.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 5-4

5.6 Connection to the Heading Source

The system is designed to interface with any ARINC-407 heading system (X, Y, Z) with no effect on the heading system or the bootstrap.

| XYZ Heading ARINC 407 | FUEL Air Data J1 | Collins 328A-2A 2P1 | Collins HSI331A P1 | Collins MCS 65 P1 | Collins 328A-5 | King KI525A P2 | King KSG105 P1 | Sperry Gyro-syn Comp. P1 | Sigma-Tek DG | Sandel SN3308 | |
|-----------------------|------------------|---------------------|--------------------|-------------------|----------------|----------------|----------------|--------------------------|--------------|---------------|----|
| | | | | | | | | | | P1 | P2 |
| X | 5 | 11 | S | 25 | 32 | s | t | L | A | | 25 |
| Y | 4 | 4 | T | 40 | 22 | v | p | M | B | | 6 |
| Z | 7 | 3 | U | 24 | 12 | t | k | K | D | 4 | |
| H | 6 | 26 | V | 6 | 53 | r | c | H | E | | 4 |
| C | 7 | 22 | W | 5 | 57 | u | f | J | H | 4 | |

The C wire (AC common) and the Z wire must be connected together at the source (bootstrap).

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 5-5

5.7 Connection to the Pitot and Static Lines

The pitot static line should be cut and a tee installed to tap into these lines. Use the appropriate type of fittings to match the type installed in the aircraft. Refer to CFR part 43, appendix E for approved practices in installing and verifying these connections.

PITOT/STATIC adapter helpful hints

To make an adapter for the Shadin ADC2000, the following parts could be used. It is recommended to use all aluminum fittings.


Existing Pitot/Static lines → AN910-1D → AN816-2D → #2 Hose (with female fittings)

| AN910 DASH NUMBER | | PIPE SIZE |
|-------------------|-------------|-----------|
| BRASS | ALUM. ALLOY | |
| -1 | -1D | 1/8" |
| -2 | -2D | 1/4" |
| -3 | -3D | 3/8" |
| -4 | -4D | 1/2" |
| -6 | -6D | 3/4" |
| -8 | -8D | 1" |

| AN816 DASH NUMBER | | TUBE O. D. | PIPE THREAD |
|-------------------|-------------|------------|-------------|
| STEEL | ALUM. ALLOY | | |
| -2 | -2D | 1/8" | 1/8" |
| -3 | -3D | 3/16" | 1/8" |
| -4 | -4D | 1/4" | 1/8" |
| -5 | -5D | 5/16" | 1/8" |
| -6 | -6D | 3/8" | 1/4" |
| -8 | -8D | 1/2" | 3/8" |
| -10 | -10D | 5/8" | 1/2" |
| -12 | -12D | 3/4" | 3/4" |
| -16 | -16D | 1" | 1" |

| MS20825 TEE | | TUBE O. D. | PIPE THREAD |
|-------------|-------------|------------|-------------|
| STEEL | ALUM. ALLOY | | |
| -2 | -2D | 1/8" | 1/8" |
| -3 | -3D | 3/16" | 1/8" |
| -4 | -4D | 1/4" | 1/8" |
| -5 | -5D | 5/16" | 1/8" |

HOSE: Stratoflex 193-2 or Aeroquip 306-2 with MS27404 (P/N 311-2D) on each end.

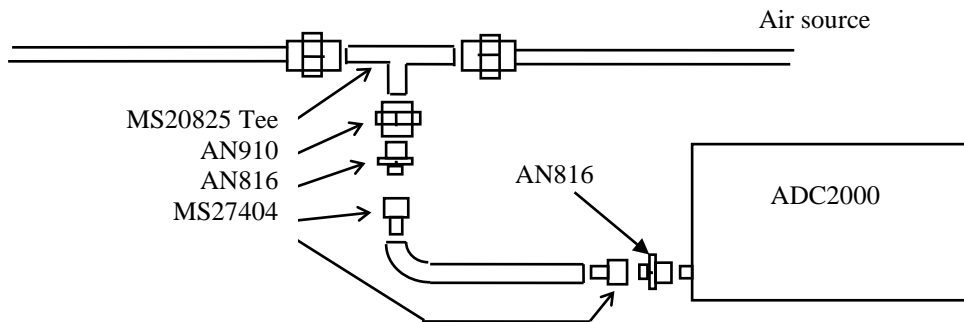

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 5-6

5.8 Connection to the Navigation Management System

1. Use the appropriate installation wiring diagram to connect the Fuel Air Data Computer's Connector J2 to the navigation management system.
2. A 2 amp. Circuit breaker should be used for powering the system. Mark the C/B "F/ADC" by engraving, painting or other approved method. Refer to specific aircraft installation drawings, if available, for correct circuit breaker location.
3. Keep the cables away from power cables, DME and transponder cables.
4. Refer to the specific Nav Receiver Installation Manuals for details.
5. If the ARINC 429 output is used, refer to the digital EFIS or flight management installation manual.

5.9 Connection to the Altimeter Baro Pot (optional)

1. Use the Installation wiring diagram 4028-A82 to connect the altimeter to J1 of the Air Data computer.
2. Remember to select the correct altimeter type in the software configuration. See section 9 in this manual.

5.10 Post Installation Checkout

1. The pitot and static system must be checked for leaks.
2. Operate the Navigation Management System; select the altitude and airspeed pages. Use the static and pitot test system to check the accuracy of the readout in the Navigation Management System pages.
3. Select heading page. Slew compass through 360°. The error should be within $\pm 1^\circ$.
4. Select the OAT page. Compare to the reported ambient temperature. The error should be within $\pm 2^\circ\text{C}$.
5. Run the engines and select the fuel flow page. Compare the fuel flow readout with the engine manufacturer's fuel flow charts under the ambient temperature and pressure conditions.
6. Set the Barometric pressure to a known value and verify that the reported barometric pressure at the Navigational Receiver is that value ± 0.01 inHg (if the option is installed).

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 6-1

6.0 OPERATING INSTRUCTIONS

1. Power the avionics DC bus and the Navigation Management System.
2. After the warm-up period density altitude and PALT are available. IAS will be available but will be out of range until actual airspeed is available. Winds aloft will be available if IAS > 40 knots and magnetic heading is within 40° of magnetic track.
3. Fuel Flow, Fuel Used, Fuel Remaining, Heading and OAT will be available after power-up.
4. Refer to the specific Nav Receiver Operator's Manual for page selection of various data.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 7-1

7.0 INITIALIZATION

1. The system requires initialization of the K-factor for fuel flow transducers or aircraft model for DC fuel flow sensors. Refer to Table 6 for **analog** fuel flow and Table 7 or Table 8 for **digital** fuel flow.
2. Refer to the specific Navigational Receiver Operator Manuals for the serial port set up.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 8-1

8.0 MAJOR COMPONENTS OF THE SYSTEM

1. Nav Receiver Input/Output
2. Fuel/Air Data Computer
3. Outside Air Temperature Probe, Shadin P/N 681201()

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-1

9.0 CONFIGURING THE AIR DATA

Each Part Number 962830-XY Air Data Computer needs to be configured to program it for the particular installation. The procedure contained in this Installation Manual is for software versions 93.00.16 to 93.00.29, 93.00.51 to 93.00.71, 93.00.77, and 93.00.82 and above. There are two methods to accomplish this task. The first method is to follow the procedures as set forth in the 'ADSETUPF User Manual'. The second method is to manually enter the information by performing a 'Loop-Back' procedure.

9.1 Configuring with 'ADSETUPF User Manual'

The 'ADSETUPF User Manual' is a configuration utility that allows setting the ADC configuration by running a program on a PC. The PC is connected to the unit via the serial communication port. Following the steps as set forth in the user manual allow the Air Data to be configured. See the 'ADSETUPF User Manual' for more details.


INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-2

9.2 Configuring Manually (Loop-Back)

The switches that are available from the back side of the unit need to be set to the appropriate positions as determined by the switch settings listed below. After the correct switch positions have been selected, the unit is powered using the 'Loop-Back' harness (consult drawing number 4028-944 contained in section 11). The purpose of the 'loop back' harness is to tie the RS-232 transmit and receive ports together. This allows the software, when the unit is powered on, to read the switch positions. Switch 1 is set to different positions to select the separate stages that the loopback is performing. There are 5 different 'loopback' procedures. Use 'loopback' procedure 1 for Software Versions 93.00.16-93.00.29. Use 'loopback' procedure 2 for software versions 93.00.51-93.00.71. Use 'loopback' procedure 3 for software versions 93.00.77. Use 'loopback' procedure 4 for software version 93.00.82 and above. Note that procedure 1 has 2 stages. Procedure 2, 3 and 4 have 4 stages and procedure 5 has 5 stages. Remember to cycle power between stages and that the F/ADC is to be powered on for 1 minute for each stage. The following figure shows the approximate switch positions:

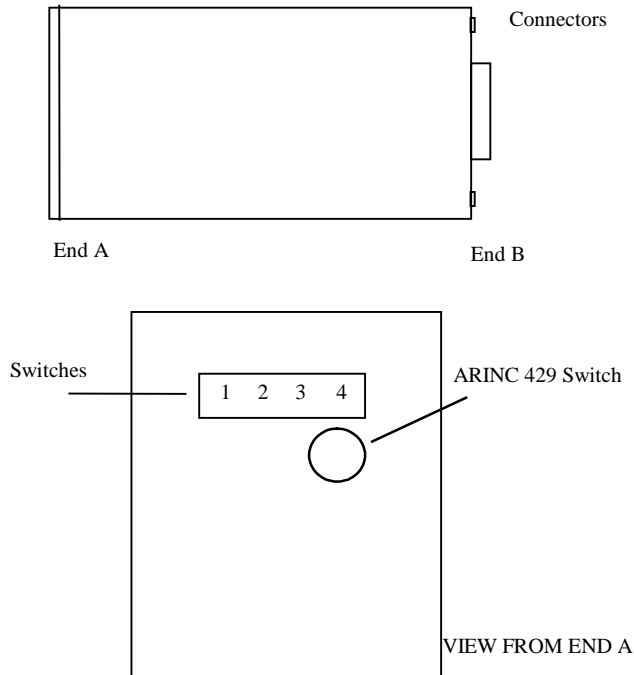

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-3

Loop-back Procedure 1 for Software Version 93.00.16 - 93.00.29

Stage 0 Loopback Configuration:

Switch 1 is set to 0 to indicate that the stage 0 loopback is being performed.

| <u>SWITCH 2</u> | <u>Fuel Units and Engine Type:</u> | |
|-----------------|------------------------------------|---------------|
| 0 | - Gallons | Single Engine |
| 1 | - Liters | " " |
| 2 | - Lbs 5.8 | " " |
| 3 | - Lbs 6.71 | " " |
| 4 | - Kilograms | " " |
| 5 | - Lbs 6.5 | " " |
| 6 | - Lbs 6.3 | " " |
| 7 | - (not used) | " " |
| 8 | - Gallons | Twin Engine |
| 9 | - Liters | " " |
| A | - Lbs 5.8 | " " |
| B | - Lbs 6.71 | " " |
| C | - Kilograms | " " |
| D | - Lbs 6.5 | " " |
| E | - Lbs 6.3 | " " |
| F | - (DO NOT USE) | |

| <u>SWITCH 3</u> | <u>9600 BAUD Loran Input Type:</u> |
|-----------------|--|
| 0 | - Trimble |
| 1 | - ARNAV |
| 2 | - Bendix or IIMorrow Apollo NMS2001, 800, 820 |
| 3 | - Garmin |
| 4 | - Northstar |
| 5 | - Foster |
| 6 | - IIMorrow 611, 612 and 618 |
| 7 | - Shadin Flow Meter |
| 8-E | - (DO NOT USE) |
| F | - Use this position to make selection on <u>SWITCH 4</u> |

| <u>SWITCH 4</u> | <u>Other Loran Input Type:</u> |
|-----------------|-------------------------------------|
| 0 | - Northstar, 1200 BAUD |
| 1 | - Foster, 1200 BAUD |
| 2 | - IIMorrow 611, 612, 618; 1200 BAUD |
| 3-F | - (DO NOT USE) |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-4

Stage 1 Loopback Configuration:

Switch 1 is set to 1 to indicate that the stage 1 loopback is being performed.

SWITCH 2 **PALT Correction (static pressure correction by model):**

- 0 - None
- 1 - MU-300
- 2 - Cessna Citation 501
- 3 - Cessna 525
- 4 - Cessna 550
- 5-F - (DO NOT USE)

SWITCH 3 **Loran Output Type:**

- 0 - Format Z - Trimble and Garmin
- 1 - Format X - ARNAV
- 2 - Generic
- 3 - Surveyor
- 4 - Bendix C - Bendix/King and F/ADC without Baro Interface
- 5 - Bendix D - Bendix/King and F/ADC with Baro Interface
- 6 - Shadin S - IIMorrow GX50, 55, 60
- 7-F - (DO NOT USE)

SWITCH 4 **Altimeter Selection for Baro DC Input:**

- 0 - None
- 1 - Type 1
- 2 - Type 2
- 3 - Type 3
- 4 - Type 4
- 5 - Type 5
- 6 - Type 6
- 7 - Type 7
- 8-F - (not used)

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-5

ALTIMETER TYPES

- Type 1:** Kollsman PD 44929-935 (done for Cessna 525).
- Type 2:** Bendix/King KEA 130A, and -346.
- Type 3:** ARINC 575-3 specification for ratio to Altitude Correction calculation.
Kollsman IDC 28007-427, -429,
Kollsman IDC 28704-A1001, -A2001, -A4001, -B4001, -C4001, -D1001,
-D2001, -D4001, -D4101, -E2101, -F2101 and -495.
- Type 4:** Kollsman IDC 28711-621 thru 624.
- Type 5:** Kollsman IDC 28007-431, -433,
Honeywell (Sperry) BA-141.
- Type 6:** Kollsman IDC 28711-500 series and -600 series.
- Type 7:** Kollsman IDC 28711-065 and -066.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-6

Loopback Procedure 2 for Software Version 93.00.51 - 93.00.71

Stage 0 Loopback Configuration:

Switch 1 is set to 0 to indicate that the stage 0 loopback is being performed.

| <u>SWITCH 2</u> | <u>Fuel Units and Engine Type:</u> | |
|-----------------|------------------------------------|---------------|
| 0 | - Gallons | Single Engine |
| 1 | - Liters | " " |
| 2 | - Lbs 5.8 | " " |
| 3 | - Lbs 6.71 | " " |
| 4 | - Kilograms | " " |
| 5 | - Lbs 6.5 | " " |
| 6 | - Lbs 6.3 | " " |
| 7 | - (not used) | " " |
| 8 | - Gallons | Twin Engine |
| 9 | - Liters | " " |
| A | - Lbs 5.8 | " " |
| B | - Lbs 6.71 | " " |
| C | - Kilograms | " " |
| D | - Lbs 6.5 | " " |
| E | - Lbs 6.3 | " " |
| F | - (DO NOT USE) | |

| <u>SWITCH 3</u> | <u>9600 BAUD Loran Input Type:</u> |
|-----------------|--|
| 0 | - Trimble |
| 1 | - ARNAV |
| 2 | - Bendix or IIMorrow Apollo NMS2001, 800, 820 |
| 3 | - Garmin |
| 4 | - Northstar |
| 5 | - Foster |
| 6 | - IIMorrow 611, 612 and 618 |
| 7 | - Shadin Flow Meter |
| 8-E | - (DO NOT USE) |
| F | - Use this position to make selection on <u>SWITCH 4</u> |

| <u>SWITCH 4</u> | <u>Other Loran Input Type:</u> |
|-----------------|-------------------------------------|
| 0 | - Northstar, 1200 BAUD |
| 1 | - Foster, 1200 BAUD |
| 2 | - IIMorrow 611, 612, 618; 1200 BAUD |
| 3-F | - (DO NOT USE) |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-7

Stage 1 Loopback Configuration:

Switch 1 is set to 1 to indicate that the stage 1 loopback is being performed.

SWITCH 2 **OAT Probe Type:**

- 0 - Shadin OAT Probe
- 1 - ARINC 575 (DO NOT USE)
- 2 - Rosemount 500 Ω (DO NOT USE)
- 3-F - (DO NOT USE)

SWITCH 3 **Loran Output Type:**

- 0 - Format Z - Trimble and Garmin
- 1 - Format X - ARNAV
- 2 - Generic
- 3 - Surveyor
- 4 - Bendix C - Bendix/King and F/ADC without Baro Interface
- 5 - Bendix D - Bendix/King and F/ADC with Baro Interface
- 6 - Shadin S - IIMorrow GX50, 55, 60
- 7 - Bendix B – (fuel only)
- 8-F - (Do Not Use)

SWITCH 4 **Altimeter Selection for Baro DC Input:**

- 0 - None
- 1 - Type 1
- 2 - Type 2
- 3 - Type 3
- 4 - Type 4
- 5 - Type 5
- 6 - Type 6
- 7 - Type 7
- 8 - (DO NOT USE)
- 9 - Type 9
- A-F - (DO NOT USE)

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-8

ALTIMETER TYPES

- Type 1:** Kollsman PD 44929-935 (done for Cessna 525).
- Type 2:** Bendix/King KEA 130A, and KEA 346 versions (King P/N 066-3062-XX) XX = 08 through 11, versions 00 though 07 have no Baro Potentiometer.
- Type 3:** ARINC 575-3 specification for ratio to Altitude Correction calculation.
Kollsman IDC 28007-427, -429,
Kollsman IDC 28704-A1001, -A2001, -A4001, -B4001, -C4001, -D1001,
-D2001, -D4001, -D4101, -4E2101, -F2101, and -495.
- Type 4:** Kollsman IDC 28711-621 thru 624.
- Type 5:** Kollsman IDC 28007-431, -433,
Honeywell (Sperry) BA-141.
- Type 6:** Kollsman IDC 28711-500 series and -600 series.
- Type 7:** Kollsman IDC 28711-065 and -066.
- Type 8:** Reserved for future use (DO NOT USE).
- Type 9:** Aerosonic P/N 10420-11968E

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-9

Stage 2 Loopback configuration:

Switch 1 is set to 2 to indicate that the stage 2 loopback is being performed.

SWITCH 2 Fuel Filter Type:

- 0 - Injector
- 1 - Carburetor

| <u>SWITCH 3 AND SWITCH 4</u> | | <u>CORRECTION For SSEC/PSEC Select:</u> | <u>F/ADC Software Version:</u> |
|------------------------------|-----|---|--------------------------------|
| 0 | 0 | - No correction | ALL |
| 0 | 1 | - MITSUBISHI MU-300 | 93.00.29 - 93.00-51 |
| 0 | 2 | - CESSNA CITATION 500/501 | 93.00.29 - 93.00-51 |
| 0 | 3 | - CESSNA 525 | 93.00.29 - 93.00-51 |
| 0 | 4 | - CESSNA 500 | 93.00.29 - 93.00-51 |
| 0 | 5 | - Citation 560 SN <=259 | 93.00.29 - 93.00-51 |
| 0 | 6 | - Citation 560 SN >=260 | 93.00.29 - 93.00-51 |
| 0 | 7 | - Citation 650 | 93.00.29 - 93.00-51 |
| 0 | 8 | - Sabreliner 65 | 93.00.29 - 93.00-51 |
| 0 | 9 | - WestWind 1124A | 93.00.29 - 93.00-51 |
| 0 | A | - LearJet 24 | 93.00.29 - 93.00-51 |
| 0 | B | - Raytheon Hawker HS 125-3A | 93.00.29 - 93.00-51 |
| 0 | C | - Falcon 20-F | 93.00.29 - 93.00-51 |
| 0 | D | - Falcon 20-C, D, E | 93.00.29 - 93.00-51 |
| 0 | E | - LearJet 25D | 93.00.29 - 93.00-51 |
| 0 | F | - Douglas DC-8 | 93.00.58 - 93.00.63 |
| 1 | 0 | - Beechjet 400 | 93.00.63 and up |
| 1 | 1 | - Boeing 707-321B | 93.00.63 and up |
| 1 | 2 | - Cessna Citation S550 | 93.00.63 and up |
| 1 | 3 | - Falcon 10 | 93.00.63 and up |
| 1 | 4 | - Falcon 50 | 93.00.63 and up |
| 1 | 5 | - Raytheon Hawker HS125-700A | 93.00.63 and up |
| 1 | 6 | - LearJet 35 | 93.00.63 and up |
| 1 | 7 | - LearJet 55 | 93.00.63 and up |
| 1 | 8 | - Sabreliner 60 (SSEC Only) | 93.00.63 and up |
| 1 | 9 | - Lockheed Jetstar II | 93.00.63 and up |
| 1 | A-F | - Reserved for future (DO NOT USE) | |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-10

Stage 3 Loopback configuration:

Switch 1 is set to 3 to indicate that the stage 3 loopback is being performed.

SWITCH 2, K-FACTOR TABLE SELECTION:

For F/ADC 962830-1 and 962830-2 only.

- 0 - Standard K-FACTOR Matrix 0 - (Table 7 in this manual)
- 1 - Alternate K-FACTOR Matrix 1- (Table 8 in this manual)
- 2-F - (DO NOT USE)

SWITCH 3, FUEL FLOW DELAY TIME

- 0 - No Delay
- 1 - 5 Second Delay
- 2 - 10 Second Delay
- 3 - 15 Second Delay
- 4 - 20 Second Delay
- 5 - 25 Second Delay
- 6 - 30 Second Delay
- 7 - 35 Second Delay
- 8 - 40 Second Delay
- 9 - 45 Second Delay
- A-F - (DO NOT USE)

| <u>SWITCH 4</u> | <u>SPECIAL OPTION DESCRIPTION</u> | <u>F/ADC Software Version</u> |
|-----------------|---|-------------------------------|
| 0 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are not transmitted if the IAS < 20 knots | 93.00.67 and up |
| 1 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are transmitted as zero knots if the IAS < 20 knots | 93.00.67 and up |
| 2-F | Reserved – DO NOT USE | |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-11

Loopback Procedure 3 for Software Version 93.00.77

Stage 0 Loopback Configuration:

Switch 1 is set to 0 to indicate that the stage 0 loopback is being performed.

| <u>SWITCH 2</u> | <u>Fuel Units and Engine Type:</u> | |
|-----------------|------------------------------------|---------------|
| 0 | - Gallons | Single Engine |
| 1 | - Liters | " " |
| 2 | - Lbs 5.8 | " " |
| 3 | - Lbs 6.71 | " " |
| 4 | - Kilograms | " " |
| 5 | - Lbs 6.5 | " " |
| 6 | - Lbs 6.3 | " " |
| 7 | - (not used) | " " |
| 8 | - Gallons | Twin Engine |
| 9 | - Liters | " " |
| A | - Lbs 5.8 | " " |
| B | - Lbs 6.71 | " " |
| C | - Kilograms | " " |
| D | - Lbs 6.5 | " " |
| E | - Lbs 6.3 | " " |
| F | - (DO NOT USE) | |

| <u>SWITCH 3</u> | <u>9600 BAUD Loran Input Type:</u> |
|-----------------|--|
| 0 | - Trimble |
| 1 | - ARNAV |
| 2 | - Bendix or IIMorrow Apollo NMS2001, 800, 820 |
| 3 | - Garmin |
| 4 | - Northstar |
| 5 | - Foster |
| 6 | - IIMorrow 611, 612 and 618 |
| 7 | - Shadin Flow Meter |
| 8-E | - (DO NOT USE) |
| F | - Use this position to make selection on <u>SWITCH 4</u> |

| <u>SWITCH 4</u> | <u>Other Loran Input Type:</u> |
|-----------------|-------------------------------------|
| 0 | - Northstar, 1200 BAUD |
| 1 | - Foster, 1200 BAUD |
| 2 | - IIMorrow 611, 612, 618; 1200 BAUD |
| 3-F | - (DO NOT USE) |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-12

Stage 1 Loopback Configuration:

Switch 1 is set to 1 to indicate that the stage 1 loopback is being performed.

SWITCH 2 **OAT Probe Type:**

- 0 - Shadin OAT Probe
- 1 - ARINC 575 (DO NOT USE)
- 2 - Rosemount 500 Ω (DO NOT USE)
- 3-F - (DO NOT USE)

SWITCH 3 **Loran Output Type:**

- 0 - Format Z - Trimble and Garmin
- 1 - Format X - ARNAV
- 2 - Generic
- 3 - Surveyor
- 4 - Bendix C - Bendix/King and F/ADC without Baro Interface
- 5 - Bendix D - Bendix/King and F/ADC with Baro Interface
- 6 - Shadin S - IIMorrow GX50, 55, 60
- 7 - Bendix B – (fuel only)
- 8 - Garmin G
- 9-F - (Do Not Use)

SWITCH 4 **Altimeter Selection for Baro DC Input:**

- 0 - None
- 1 - Type 1
- 2 - Type 2
- 3 - Type 3
- 4 - Type 4
- 5 - Type 5
- 6 - Type 6
- 7 - Type 7
- 8 - (DO NOT USE)
- 9 - Type 9
- A-F - (DO NOT USE)

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-13

ALTIMETER TYPES

- Type 1:** Kollsman PD 44929-935 (done for Cessna 525).
- Type 2:** Bendix/King KEA 130A, and KEA 346 versions (King P/N 066-3062-XX) XX = 08 through 11, versions 00 though 07 have no Baro Potentiometer.
- Type 3:** ARINC 575-3 specification for ratio to Altitude Correction calculation.
Kollsman IDC 28007-427, -429,
Kollsman IDC 28704-A1001, -A2001, -A4001, -B4001, -C4001, -D1001,
-D2001, -D4001, -D4101, -4E2101, -F2101, and -495.
- Type 4:** Kollsman IDC 28711-621 thru 624.
- Type 5:** Kollsman IDC 28007-431, -433,
Honeywell (Sperry) BA-141.
- Type 6:** Kollsman IDC 28711-500 series and -600 series.
- Type 7:** Kollsman IDC 28711-065 and -066.
- Type 8:** Reserved for future use (DO NOT USE).
- Type 9:** Aerosonic P/N 10420-11968E

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-14

Stage 2 Loopback configuration:

Switch 1 is set to 2 to indicate that the stage 2 loopback is being performed.

SWITCH 2 Fuel Filter Type:

- 0 - Injector
- 1 - Carburetor

| <u>SWITCH 3 AND SWITCH 4</u> | | <u>CORRECTION For SSEC/PSEC Select:</u> | <u>F/ADC Software Version:</u> |
|------------------------------|-----|---|--------------------------------|
| 0 | 0 | - No correction | ALL |
| 0 | 1 | - MITSUBISHI MU-300 | 93.00.29 - 93.00-51 |
| 0 | 2 | - CESSNA CITATION 500/501 | 93.00.29 - 93.00-51 |
| 0 | 3 | - CESSNA 525 | 93.00.29 - 93.00-51 |
| 0 | 4 | - CESSNA 500 | 93.00.29 - 93.00-51 |
| 0 | 5 | - Citation 560 SN <=259 | 93.00.29 - 93.00-51 |
| 0 | 6 | - Citation 560 SN >=260 | 93.00.29 - 93.00-51 |
| 0 | 7 | - Citation 650 | 93.00.29 - 93.00-51 |
| 0 | 8 | - Sabreliner 65 | 93.00.29 - 93.00-51 |
| 0 | 9 | - WestWind 1124A | 93.00.29 - 93.00-51 |
| 0 | A | - LearJet 24 | 93.00.29 - 93.00-51 |
| 0 | B | - Raytheon Hawker HS 125-3A | 93.00.29 - 93.00-51 |
| 0 | C | - Falcon 20-F | 93.00.29 - 93.00-51 |
| 0 | D | - Falcon 20-C, D, E | 93.00.29 - 93.00-51 |
| 0 | E | - LearJet 25D | 93.00.29 - 93.00-51 |
| 0 | F | - Douglas DC-8 | 93.00.58 - 93.00.63 |
| 1 | 0 | - Beechjet 400 | 93.00.63 and up |
| 1 | 1 | - Boeing 707-321B | 93.00.63 and up |
| 1 | 2 | - Cessna Citation S550 | 93.00.63 and up |
| 1 | 3 | - Falcon 10 | 93.00.63 and up |
| 1 | 4 | - Falcon 50 | 93.00.63 and up |
| 1 | 5 | - Raytheon Hawker HS125-700A | 93.00.63 and up |
| 1 | 6 | - LearJet 35 | 93.00.63 and up |
| 1 | 7 | - LearJet 55 | 93.00.63 and up |
| 1 | 8 | - Sabreliner 60 (SSEC Only) | 93.00.63 and up |
| 1 | 9 | - Lockheed Jetstar II | 93.00.63 and up |
| 1 | A-F | - Reserved for future (DO NOT USE) | |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-15

Stage 3 Loopback configuration:

Switch 1 is set to 3 to indicate that the stage 3 loopback is being performed.

SWITCH 2, K-FACTOR TABLE SELECTION:

For F/ADC 962830-1 and 962830-2 only.

- 0 - Standard K-FACTOR Matrix 0 - (Table 7 in this manual)
- 1 - Alternate K-FACTOR Matrix 1- (Table 8 in this manual)
- 2-F - (DO NOT USE)

SWITCH 3, FUEL FLOW DELAY TIME

- 0 - No Delay
- 1 - 5 Second Delay
- 2 - 10 Second Delay
- 3 - 15 Second Delay
- 4 - 20 Second Delay
- 5 - 25 Second Delay
- 6 - 30 Second Delay
- 7 - 35 Second Delay
- 8 - 40 Second Delay
- 9 - 45 Second Delay
- A-F - (DO NOT USE)

| <u>SWITCH 4</u> | <u>SPECIAL OPTION DESCRIPTION</u> | <u>F/ADC Software Version</u> |
|-----------------|---|-------------------------------|
| 0 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are not transmitted if the IAS < 20 knots | 93.00.67 and up |
| 1 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are transmitted as zero knots if the IAS < 20 knots | 93.00.67 and up |
| 2-F | Reserved – DO NOT USE | |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-16

Loopback Procedure 4 for Software Version 93.00.82

Stage 0 Loopback Configuration:

Switch 1 is set to 0 to indicate that the stage 0 loopback is being performed.

| <u>SWITCH 2</u> | <u>Fuel Units and Engine Type:</u> | |
|-----------------|------------------------------------|---------------|
| 0 | - Gallons | Single Engine |
| 1 | - Liters | " " |
| 2 | - Lbs 5.8 | " " |
| 3 | - Lbs 6.71 | " " |
| 4 | - Kilograms | " " |
| 5 | - Lbs 6.5 | " " |
| 6 | - Lbs 6.3 | " " |
| 7 | - (not used) | " " |
| 8 | - Gallons | Twin Engine |
| 9 | - Liters | " " |
| A | - Lbs 5.8 | " " |
| B | - Lbs 6.71 | " " |
| C | - Kilograms | " " |
| D | - Lbs 6.5 | " " |
| E | - Lbs 6.3 | " " |
| F | - (DO NOT USE) | |

| <u>SWITCH 3</u> | <u>9600 BAUD Loran Input Type:</u> |
|-----------------|--|
| 0 | - Trimble |
| 1 | - ARNAV |
| 2 | - Bendix or IIMorrow Apollo NMS2001, 800, 820 |
| 3 | - Garmin |
| 4 | - Northstar |
| 5 | - Foster |
| 6 | - IIMorrow 611, 612 and 618 |
| 7 | - Shadin Flow Meter |
| 8-E | - (DO NOT USE) |
| F | - Use this position to make selection on <u>SWITCH 4</u> |

| <u>SWITCH 4</u> | <u>Other Loran Input Type:</u> |
|-----------------|-------------------------------------|
| 0 | - Northstar, 1200 BAUD |
| 1 | - Foster, 1200 BAUD |
| 2 | - IIMorrow 611, 612, 618; 1200 BAUD |
| 3-F | - (DO NOT USE) |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-17

Stage 1 Loopback Configuration:

Switch 1 is set to 1 to indicate that the stage 1 loopback is being performed.

SWITCH 2OAT Probe Type:

- | | |
|-----|---------------------------------------|
| 0 | - Shadin OAT Probe |
| 1 | - ARINC 575 (DO NOT USE) |
| 2 | - Rosemount 500 Ω (DO NOT USE) |
| 3-F | - (DO NOT USE) |

SWITCH 3Loran Output Type:

- | | |
|-----|---|
| 0 | - Format Z - Trimble and Garmin |
| 1 | - Format X - ARNAV |
| 2 | - Generic |
| 3 | - Surveyor |
| 4 | - Bendix C - Bendix/King and F/ADC without Baro Interface |
| 5 | - Bendix D - Bendix/King and F/ADC with Baro Interface |
| 6 | - Shadin S - IIMorrow GX50, 55, 60 |
| 7 | - Bendix B - (fuel only) |
| 8 | - Garmin G |
| 9-F | - (Do Not Use) |

SWITCH 4Altimeter Selection for Baro DC Input:

- | | |
|-----|----------------|
| 0 | - None |
| 1 | - Type 1 |
| 2 | - Type 2 |
| 3 | - Type 3 |
| 4 | - Type 4 |
| 5 | - Type 5 |
| 6 | - Type 6 |
| 7 | - Type 7 |
| 8 | - (DO NOT USE) |
| 9 | - Type 9 |
| A | - (DO NOT USE) |
| B | - Type 11 |
| C-F | - (DO NOT USE) |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-18

ALTIMETER TYPES

- Type 1:** Kollsman PD 44929-935 (done for Cessna 525).
- Type 2:** Bendix/King KEA 130A, and KEA 346 versions (King P/N 066-3062-XX) XX = 08 through 11, versions 00 though 07 have no Baro Potentiometer.
- Type 3:** ARINC 575-3 specification for ratio to Altitude Correction calculation.
Kollsman IDC 28007-427, -429,
Kollsman IDC 28704-A1001, -A2001, -A4001, -B4001, -C4001, -D1001,
-D2001, -D4001, -D4101, -4E2101, -F2101, and -495.
- Type 4:** Kollsman IDC 28711-621 thru 624.
- Type 5:** Kollsman IDC 28007-431, -433,
Honeywell (Sperry) BA-141.
- Type 6:** Kollsman IDC 28711-500 series and -600 series.
- Type 7:** Kollsman IDC 28711-065 and -066.
- Type 8:** Reserved for future use (DO NOT USE).
- Type 9:** Aerosonic P/N 10420-11968E
- Type 10:** Reserved for future use (DO NOT USE).
- Type 11:** IDC P/N KTS B45152 10 410

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-19

Stage 2 Loopback configuration:

Switch 1 is set to 2 to indicate that the stage 2 loopback is being performed.

SWITCH 2 Fuel Filter Type:

- 0 - Injector
- 1 - Carburetor

| <u>SWITCH 3 AND SWITCH 4</u> | | <u>CORRECTION For SSEC/PSEC Select:</u> | <u>F/ADC Software Version:</u> |
|------------------------------|-----|---|--------------------------------|
| 0 | 0 | - No correction | ALL |
| 0 | 1 | - MITSUBISHI MU-300 | 93.00.29 - 93.00-51 |
| 0 | 2 | - CESSNA CITATION 500/501 | 93.00.29 - 93.00-51 |
| 0 | 3 | - CESSNA 525 | 93.00.29 - 93.00-51 |
| 0 | 4 | - CESSNA 500 | 93.00.29 - 93.00-51 |
| 0 | 5 | - Citation 560 SN <=259 | 93.00.29 - 93.00-51 |
| 0 | 6 | - Citation 560 SN >=260 | 93.00.29 - 93.00-51 |
| 0 | 7 | - Citation 650 | 93.00.29 - 93.00-51 |
| 0 | 8 | - Sabreliner 65 | 93.00.29 - 93.00-51 |
| 0 | 9 | - WestWind 1124A | 93.00.29 - 93.00-51 |
| 0 | A | - LearJet 24 | 93.00.29 - 93.00-51 |
| 0 | B | - Raytheon Hawker HS 125-3A | 93.00.29 - 93.00-51 |
| 0 | C | - Falcon 20-F | 93.00.29 - 93.00-51 |
| 0 | D | - Falcon 20-C, D, E | 93.00.29 - 93.00-51 |
| 0 | E | - LearJet 25D | 93.00.29 - 93.00-51 |
| 0 | F | - Douglas DC-8 | 93.00.58 - 93.00.63 |
| 1 | 0 | - Beechjet 400 | 93.00.63 and up |
| 1 | 1 | - Boeing 707-321B | 93.00.63 and up |
| 1 | 2 | - Cessna Citation S550 | 93.00.63 and up |
| 1 | 3 | - Falcon 10 | 93.00.63 and up |
| 1 | 4 | - Falcon 50 | 93.00.63 and up |
| 1 | 5 | - Raytheon Hawker HS125-700A | 93.00.63 and up |
| 1 | 6 | - LearJet 35 | 93.00.63 and up |
| 1 | 7 | - LearJet 55 | 93.00.63 and up |
| 1 | 8 | - Sabreliner 60 (SSEC Only) | 93.00.63 and up |
| 1 | 9 | - Lockheed Jetstar II | 93.00.63 and up |
| | A-F | - Reserved for future (DO NOT USE) | |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-20

Stage 3 Loopback configuration:

Switch 1 is set to 3 to indicate that the stage 3 loopback is being performed.

SWITCH 2, K-FACTOR TABLE SELECTION:

For F/ADC 962830-1 and 962830-2 only.

- 0 - Standard K-FACTOR Matrix 0 - (Table 7 in this manual)
- 1 - Alternate K-FACTOR Matrix 1- (Table 8 in this manual)
- 2-F - (DO NOT USE)

SWITCH 3, FUEL FLOW DELAY TIME

- 0 - No Delay
- 1 - 5 Second Delay
- 2 - 10 Second Delay
- 3 - 15 Second Delay
- 4 - 20 Second Delay
- 5 - 25 Second Delay
- 6 - 30 Second Delay
- 7 - 35 Second Delay
- 8 - 40 Second Delay
- 9 - 45 Second Delay
- A-F - (DO NOT USE)

| <u>SWITCH 4</u> | <u>SPECIAL OPTION DESCRIPTION</u> | <u>F/ADC Software Version</u> |
|-----------------|---|-------------------------------|
| 0 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are not transmitted if the IAS < 20 knots | 93.00.67 and up |
| 1 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are transmitted as zero knots if the IAS < 20 knots | 93.00.67 and up |
| 2-F | Reserved – DO NOT USE | |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-21

Stage 4 Loopback configuration:

Switch 1 is set to 4 to indicate that the stage 4 loopback is being performed. Refer to the OAT probe calibration certificate for the Ta, Tb, Tc calibration code selection.

SWITCH 2, OAT Ta CALIBRATION CODE SELECTION:

0-F - Refer to calibration certificate for "A" code selection 0 to F.

SWITCH 3, OAT Tb CALIBRATION CODE SELECTION

0-F - Refer to calibration certificate for "B" code selection 0 to F.

SWITCH 4, OAT Tc CALIBRATION CODE SELECTION

0-F - Refer to calibration certificate for "C" code selection 0 to F.

Note: Switch 2, 3, and 4 are set to position 0 (zero), if the OAT probe does not have a calibration code marking, (i.e. A=0, B=0, C=0).

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-22

Loopback Procedure 5 for Software Version 93.00.85+

Stage 0 Loopback Configuration:

Switch 1 is set to 0 to indicate that the stage 0 loopback is being performed.

| <u>SWITCH 2</u> | <u>Fuel Units and Engine Type:</u> | |
|-----------------|------------------------------------|---------------|
| 0 | - Gallons | Single Engine |
| 1 | - Liters | " " |
| 2 | - Lbs 5.8 | " " |
| 3 | - Lbs 6.71 | " " |
| 4 | - Kilograms | " " |
| 5 | - Lbs 6.5 | " " |
| 6 | - Lbs 6.3 | " " |
| 7 | - (not used) | " " |
| 8 | - Gallons | Twin Engine |
| 9 | - Liters | " " |
| A | - Lbs 5.8 | " " |
| B | - Lbs 6.71 | " " |
| C | - Kilograms | " " |
| D | - Lbs 6.5 | " " |
| E | - Lbs 6.3 | " " |
| F | - (DO NOT USE) | |

| <u>SWITCH 3</u> | <u>9600 BAUD Loran Input Type:</u> |
|-----------------|--|
| 0 | - Trimble |
| 1 | - ARNAV |
| 2 | - Bendix or IIMorrow Apollo NMS2001, 800, 820 |
| 3 | - Garmin |
| 4 | - Northstar |
| 5 | - Foster |
| 6 | - IIMorrow 611, 612 and 618 |
| 7 | - Shadin Flow Meter |
| 8-E | - (DO NOT USE) |
| F | - Use this position to make selection on <u>SWITCH 4</u> |

| <u>SWITCH 4</u> | <u>Other Loran Input Type:</u> |
|-----------------|-------------------------------------|
| 0 | - Northstar, 1200 BAUD |
| 1 | - Foster, 1200 BAUD |
| 2 | - IIMorrow 611, 612, 618; 1200 BAUD |
| 3-F | - (DO NOT USE) |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-23

Stage 1 Loopback Configuration:

Switch 1 is set to 1 to indicate that the stage 1 loopback is being performed.

SWITCH 2**OAT Probe Type:**

- 0 - Shadin OAT Probe
- 1 - ARINC 575 (DO NOT USE)
- 2 - Rosemount 500 Ω (DO NOT USE)
- 3-F - (DO NOT USE)

SWITCH 3**Loran Output Type:**

- 0 - Format Z - Trimble and Garmin
- 1 - Format X - ARNAV
- 2 - Generic
- 3 - Surveyor
- 4 - Bendix C - Bendix/King and F/ADC without Baro Interface
- 5 - Bendix D - Bendix/King and F/ADC with Baro Interface
- 6 - Shadin S - IIMorrow GX50, 55, 60
- 7 - Bendix B – (fuel only)
- 8 - Garmin G
- 9-F - (Do Not Use)

SWITCH 4**Altimeter Selection for Baro DC Input:**

- 0 - None
- 1 - Type 1
- 2 - Type 2
- 3 - Type 3
- 4 - Type 4
- 5 - Type 5
- 6 - Type 6
- 7 - Type 7
- 8 - (DO NOT USE)
- 9 - Type 9
- A - (DO NOT USE)
- B - Type 11
- C-F - (DO NOT USE)

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-24

ALTIMETER TYPES

- Type 1:** Kollsman PD 44929-935 (done for Cessna 525).
- Type 2:** Bendix/King KEA 130A, and KEA 346 versions (King P/N 066-3062-XX) XX = 08 through 11, versions 00 though 07 have no Baro Potentiometer.
- Type 3:** ARINC 575-3 specification for ratio to Altitude Correction calculation.
Kollsman IDC 28007-427, -429,
Kollsman IDC 28704-A1001, -A2001, -A4001, -B4001, -C4001, -D1001,
-D2001, -D4001, -D4101, -4E2101, -F2101, and -495.
- Type 4:** Kollsman IDC 28711-621 thru 624.
- Type 5:** Kollsman IDC 28007-431, -433,
Honeywell (Sperry) BA-141.
- Type 6:** Kollsman IDC 28711-500 series and -600 series.
- Type 7:** Kollsman IDC 28711-065 and -066.
- Type 8:** Reserved for future use (DO NOT USE).
- Type 9:** Aerosonic P/N 10420-11968E
- Type 10:** Reserved for future use (DO NOT USE).
- Type 11:** IDC P/N KTS B45152 10 410

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-25

Stage 2 Loopback configuration:

Switch 1 is set to 2 to indicate that the stage 2 loopback is being performed.

SWITCH 2 Fuel Filter Type:

- 0 - Injector
- 1 - Carburetor

| <u>SWITCH 3 AND SWITCH 4</u> | <u>CORRECTION For SSEC/PSEC Select:</u> | <u>F/ADC Software Version:</u> |
|------------------------------|---|--------------------------------|
| 0 | 0 - No correction | ALL |
| 0 | 1 - MITSUBISHI MU-300 | 93.00.29 - 93.00-51 |
| 0 | 2 - CESSNA CITATION 500/501 | 93.00.29 - 93.00-51 |
| 0 | 3 - CESSNA 525 | 93.00.29 - 93.00-51 |
| 0 | 4 - CESSNA 500 | 93.00.29 - 93.00-51 |
| 0 | 5 - Citation 560 SN <=259 | 93.00.29 - 93.00-51 |
| 0 | 6 - Citation 560 SN >=260 | 93.00.29 - 93.00-51 |
| 0 | 7 - Citation 650 | 93.00.29 - 93.00-51 |
| 0 | 8 - Sabreliner 65 | 93.00.29 - 93.00-51 |
| 0 | 9 - WestWind 1124A | 93.00.29 - 93.00-51 |
| 0 | A - LearJet 24 | 93.00.29 - 93.00-51 |
| 0 | B - Raytheon Hawker HS 125-3A | 93.00.29 - 93.00-51 |
| 0 | C - Falcon 20-F | 93.00.29 - 93.00-51 |
| 0 | D - Falcon 20-C, D, E | 93.00.29 - 93.00-51 |
| 0 | E - LearJet 25D | 93.00.29 - 93.00-51 |
| 0 | F - Douglas DC-8 | 93.00.58 - 93.00.63 |
| 1 | 0 - Beechjet 400 | 93.00.63 and up |
| 1 | 1 - Boeing 707-321B | 93.00.63 and up |
| 1 | 2 - Cessna Citation S550 | 93.00.63 and up |
| 1 | 3 - Falcon 10 | 93.00.63 and up |
| 1 | 4 - Falcon 50 | 93.00.63 and up |
| 1 | 5 - Raytheon Hawker HS125-700A | 93.00.63 and up |
| 1 | 6 - LearJet 35 | 93.00.63 and up |
| 1 | 7 - LearJet 55 | 93.00.63 and up |
| 1 | 8 - Sabreliner 60 (SSEC Only) | 93.00.63 and up |
| 1 | 9 - Lockheed Jetstar II | 93.00.63 and up |
| 1 | A - Antonov (AN 12) | 93.00.85 and up |
| 1 | B - Antonov (AN 24) | 93.00.85 and up |
| 1 | C - Antonov (AN 26) | 93.00.85 and up |
| 1 | D - Antonov (AN 30) | 93.00.85 and up |
| 1 | E - Yakovlev (YAK 40) | 93.00.85 and up |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-26

Stage 3 Loopback configuration:

Switch 1 is set to 3 to indicate that the stage 3 loopback is being performed.

SWITCH 2, K-FACTOR TABLE SELECTION:

For F/ADC 962830-1Y and 962830-2Y only.

- 0 - Standard K-FACTOR Matrix 0 - (Table 7 in this manual)
- 1 - Alternate K-FACTOR Matrix 1- (Table 8 in this manual)
- 2-F - (DO NOT USE)

SWITCH 3, FUEL FLOW DELAY TIME

- 0 - No Delay
- 1 - 5 Second Delay
- 2 - 10 Second Delay
- 3 - 15 Second Delay
- 4 - 20 Second Delay
- 5 - 25 Second Delay
- 6 - 30 Second Delay
- 7 - 35 Second Delay
- 8 - 40 Second Delay
- 9 - 45 Second Delay
- A-F - (DO NOT USE)

| <u>SWITCH 4</u> | <u>SPECIAL OPTION DESCRIPTION</u> | <u>F/ADC Software Version</u> |
|------------------------|---|--------------------------------------|
| 0 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are not transmitted if the IAS < 20 knots | 93.00.67 and up |
| 1 | -ARINC 429 labels 206 (IAS) and 210 (TAS) are transmitted as zero knots if the IAS < 20 knots | 93.00.67 and up |
| 2-F | Reserved – DO NOT USE | |

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-27

Stage 4 Loopback configuration:

Switch 1 is set to 4 to indicate that the stage 4 loopback is being performed. Refer to the OAT probe calibration certificate for the Ta, Tb, Tc calibration code selection.

SWITCH 2, OAT Ta CALIBRATION CODE SELECTION:

0-F - Refer to calibration certificate for "A" code selection 0 to F.

SWITCH 3, OAT Tb CALIBRATION CODE SELECTION

0-F - Refer to calibration certificate for "B" code selection 0 to F.

SWITCH 4, OAT Tc CALIBRATION CODE SELECTION

0-F - Refer to calibration certificate for "C" code selection 0 to F.

Note: Switch 2, 3, and 4 are set to position 0 (zero), if the OAT probe does not have a calibration code marking, (i.e. A=0, B=0, C=0).

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 9-28

SELECT NO DELAY

Only under special circumstances should a fuel flow delay time other than “No Delay” be selected. Read the following paragraphs for a description of these special circumstances.

On a few aircraft installations which have digital fuel flow and use a very low K-factor (858 pulses per gallon), there has been a problem with the Air Data reporting a large jump in fuel used as well as a corresponding decrease in fuel remaining at engine startup. This is not considered to be a Shadin Air Data problem, but rather has been defined as an aircraft problem involving noise on the digital fuel flow signal.

A solution for this problem is to use the Air Data fuel flow delay feature. This feature suppresses the fuel flow (and its affect on fuel used and remaining) for a startup delay time each time the engine starts. Fuel flow delay time is selectable in the Air Data loopback mode, with selections of 0, 5, 10, 15, 20, 25, 30, 35, 40, and 45 seconds delay available.

If a fuel flow delay is needed, start by reconfiguring the ADC to use a large delay (i.e. 45 seconds). If the large fuel flow mitigated the problem, try reducing the delay until the problem returns. Then, use the least amount of fuel flow delay that suppresses the problem.

When a fuel flow delay time is selected the Air Data checks for fuel flow below 15 pph. If the fuel flow is below 15 pph, the Air Data considers the engine to be off and returns a fuel flow of 0. Then, as soon as the fuel flow exceeds 15 pph, the Air Data continues to return a fuel flow of 0 until the delay time has expired. In a twin engine, the Air Data zeroes both fuel flows during the startup delay for each engine.

SPECIAL OPTIONS

Only under special circumstance should SPECIAL OPTION 1 be selected. Read the following paragraphs for a description of the special circumstance.

Because the IAS range on the Air Data computer is valid from 20 to 350 knots, ARINC 429 labels 206 and 210 are transmitted with NCD status and stop being transmitted almost simultaneously if the IAS is less than 20 knots. In order to interface with certain avionics equipment which exhibit warnings if a valid IAS or TAS label is not received, SPECIAL OPTION 1 was implemented.

When the Air Data computer is configured with SPECIAL OPTION 1 the Arinc 429 labels 206 and 210 are transmitted with OK status and a value of zero knots if the actual IAS is less than 20 knots.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 10-1

10.0 SETTING THE K-FACTOR

The process of setting the K-Factor is needed to match the F/ADC to the aircraft fuel flow systems characteristics. To set the K-Factor into the F/ADC you must first determine whether it is an Analog, Digital or Sine Fuel Flow unit.

| <u>P/N</u> | <u>FUEL FLOW TYPE</u> |
|------------|-----------------------|
| 962830-1Y | Digital |
| 962830-2Y | Sine Wave |
| 962830-3Y | Analog |

Use the switch settings from the appropriate table to set the K-Factor.

For Digital or Sine units (P/N (s) 962830-1Y and -2Y), use the Digital K-Factor Settings Tables.

Switches 1 & 2 select the left K-Factor

Switches 3 & 4 select the right K-Factor

Due to possible fuel flow system peculiarities, switches 1 & 2 and switches 3 & 4 do not necessarily need to be set to the same setting. For a one-engine system, use switches 1 & 2.

For Analog units (P/N 962830-3Y), use the Analog K-Factor Settings Table.

Switches 1 & 2 select the main engine K-Factor.

Switches 3 & 4 select the offset.

The offset is simply the value represented by switches 3 & 4 in the Analog K-Factor Settings Table on the following page. For example, if you wanted an offset of 0, the switch settings would be 0,0. If you wanted an offset of 416, the switch settings would be 0, 1. If you wanted an offset of 1094, the switch settings would be 0, 4.

Configuration is now complete.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 10-2

| Manufacturer | Model | SW1 | SW2 | SW3 | SW4 | K-Factor | Offset |
|--------------|------------------------------------|-----|-----|-----|-----|----------|--------|
| Beech | KingAir B200 | 0 | 0 | 0 | 1 | 77000 | 416 |
| Beech | KingAir A100 | 0 | 1 | 0 | 2 | 26150 | 875 |
| Beech | KingAir C90 | 0 | 1 | 0 | 2 | 26150 | 875 |
| Beech | KingAir F90 | 0 | 0 | 0 | 1 | 77000 | 416 |
| Beech | KingAir C90A | 0 | 0 | 0 | 1 | 77000 | 416 |
| Beech | KingAir 200 | 0 | 0 | 0 | 1 | 77000 | 416 |
| Beech | BeechJet | 0 | 2 | 0 | 0 | 11540 | 0 |
| Beech | KingAir B100 | 0 | 3 | 0 | 2 | 26150 | 875 |
| Beech | Beech 600 | 0 | 4 | 0 | 0 | 38460 | 0 |
| Beech | Beech 750 | 0 | 5 | 0 | 0 | 30770 | 0 |
| Beech | Beech 800 | 0 | 6 | 0 | 0 | 28850 | 0 |
| Cessna | Citation, Ametek Gauge, 02C208E | 0 | C | 0 | 0 | 16270 | 0 |
| Cessna | Citation, Simmons Gauge 393002-009 | 1 | C | 0 | 0 | 14300 | 0 |
| Cessna | Citation II/SII | 0 | C | 0 | 0 | 16270 | 0 |
| Cessna | Citation III | 0 | D | 0 | 4 | 9620 | 1094 |
| Cessna | Model 525 | 0 | E | 0 | 0 | 21980 | 0 |
| Piper | Cheyenne III | 1 | 9 | 0 | 0 | 41960 | 0 |
| Piper | Cheyenne IV | 1 | 1 | 0 | 0 | 46150 | 0 |
| LearJet | LearJet | 0 | 7 | 0 | 0 | 15380 | 0 |
| LearJet | Model 36 (5V) | 0 | 2 | 0 | 0 | 11540 | 0 |
| LearJet | Model 36 (10V) | 0 | 8 | 0 | 0 | 23080 | 0 |
| Boeing | Boeing-737-300 | 0 | 9 | 0 | 3 | 1790 | 0 |
| British Aero | BAE ATP | 0 | 7 | 0 | 0 | 15380 | 0 |
| British Aero | BAE-125-800 | 0 | A | 0 | 0 | 8240 | 378 |
| British Aero | HS-125 | 0 | B | 0 | 0 | 10490 | 0 |
| Canadian | CL600 | 0 | F | 0 | 0 | 6590 | 0 |
| Canadian | CL601 | 1 | 0 | 0 | 0 | 5130 | 0 |
| Dornier | DO-228 | 1 | 1 | 0 | 0 | 46150 | 0 |
| Daussault | FALCON 10 | 1 | 2 | 0 | 0 | 11540 | 0 |
| Daussault | FALCON 20 | 1 | 2 | 0 | 0 | 7690 | 0 |
| Daussault | TFE-371 | 1 | 2 | 0 | 0 | 7690 | 0 |
| Swearngen | MERLIN | 0 | 4 | 0 | 0 | 38460 | 0 |
| Gulfstream | GULFSTREAM II | 1 | 3 | 0 | 0 | 2880 | 0 |
| Gulfstream | GULFSTREAM III | 1 | 4 | 0 | 0 | 2310 | 0 |
| Aerospatiale | PUMA | 1 | 5 | 0 | 0 | 76920 | 0 |
| DHC | DHC DASH 8 | 1 | 6 | 0 | 0 | 19230 | 0 |
| IAI | ASTRA 1125 | 1 | 7 | 0 | 5 | 9230 | 2188 |
| IAI | WESTWIND 1124 | 1 | 8 | 0 | 0 | 10490 | 0 |
| Sikorsky | S-76A | 1 | 1 | 0 | 0 | 46150 | 0 |
| Sikorsky | S-76B | 0 | 6 | 0 | 0 | 28850 | 0 |
| Sabre | SABRE 65 | 1 | 7 | 0 | 5 | 9230 | 2188 |

Table 6 – Analog K-Factor Settings

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 10-3

| <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 860 | D | D | 8800 | 5 | 0 | 15300 | E | F |
| 5000 | 6 | B | 9000 | 5 | 1 | 18000 | 3 | 0 |
| 5050 | 6 | C | 9200 | 5 | 2 | 18200 | 3 | 1 |
| 5100 | 6 | D | 9400 | 5 | 3 | 18400 | 2 | 2 |
| 5150 | 6 | E | 9600 | 5 | 4 | 18600 | 3 | 3 |
| 5200 | 6 | F | 9800 | 5 | 5 | 18800 | 3 | 4 |
| 5250 | 7 | 0 | 10000 | 5 | 6 | 19000 | 3 | 5 |
| 5300 | 7 | 1 | 10100 | 5 | 7 | 19200 | 3 | 6 |
| 5600 | 6 | 0 | 10200 | 5 | 8 | 19400 | 3 | 7 |
| 5650 | 6 | 1 | 10300 | 5 | A | 19600 | 3 | 8 |
| 5700 | 6 | 2 | 10400 | 5 | B | 19800 | 3 | 9 |
| 5750 | 6 | 3 | 10500 | 5 | C | 20000 | 3 | A |
| 5800 | 6 | 4 | 10600 | 5 | D | 20200 | 3 | B |
| 5850 | 6 | 5 | 10700 | 5 | E | 20400 | 3 | C |
| 5900 | 6 | 6 | 10800 | 5 | F | 20600 | 3 | D |
| 5950 | 6 | 7 | 10900 | D | 6 | 20800 | 3 | E |
| 6000 | 6 | 8 | 11000 | D | 7 | 21000 | 3 | F |
| 6380 | C | B | 11100 | D | 8 | 21200 | 4 | 0 |
| 6400 | C | C | 11200 | D | 9 | 21400 | 4 | 1 |
| 6420 | C | D | 11300 | D | A | 21600 | 4 | 2 |
| 6440 | C | E | 11400 | D | B | 21800 | 4 | 3 |
| 6460 | C | F | 11500 | D | C | 22000 | 4 | 4 |
| 6480 | D | 0 | 14500 | D | E | 22200 | 4 | 5 |
| 6500 | D | 1 | 14600 | D | F | 22400 | 4 | 6 |
| 6520 | D | 2 | 14700 | E | 9 | 22600 | 4 | 7 |
| 6540 | D | 3 | 14800 | E | A | 22800 | 4 | 8 |
| 6560 | D | 4 | 14900 | E | B | 23000 | 4 | 9 |
| 6580 | D | 5 | 15000 | E | C | 23200 | 4 | A |
| 6660 | 6 | A | 15100 | E | D | 23400 | 4 | B |
| 7640 | 5 | 9 | 15200 | E | E | 23600 | 4 | C |

Table 7 – Matrix 0 - Digital K-Factor Settings

Note: The Digital K-Factor Settings for SW1 and SW2 are the same for SW3 and SW4 respectively.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 10-4

| <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 23800 | 4 | D | 29800 | F | B | 40000 | 9 | 4 |
| 24000 | 4 | E | 30000 | F | C | 40200 | 9 | 5 |
| 24200 | 4 | F | 30200 | F | D | 40400 | 9 | 6 |
| 24400 | B | A | 30400 | F | E | 40600 | 9 | 7 |
| 24600 | B | B | 33800 | 6 | 9 | 40800 | 9 | D |
| 24800 | B | C | 37000 | B | 9 | 41000 | 9 | E |
| 25000 | B | D | 37200 | B | 8 | 41200 | 9 | F |
| 25200 | B | E | 37400 | B | 7 | 41400 | 1 | 0 |
| 25400 | B | F | 37600 | B | 6 | 41600 | 1 | 1 |
| 25600 | C | 0 | 37800 | B | 5 | 41800 | 1 | 2 |
| 25800 | C | 1 | 38000 | 8 | 0 | 42000 | 1 | 3 |
| 26000 | C | 2 | 38100 | 8 | 1 | 42200 | 1 | 4 |
| 26200 | C | 4 | 38200 | 8 | 2 | 42400 | 1 | 5 |
| 26400 | C | 5 | 38300 | 8 | 3 | 42600 | 1 | 6 |
| 26600 | C | 6 | 38400 | 8 | 4 | 42800 | 1 | 7 |
| 26800 | C | 7 | 38500 | 8 | 5 | 43000 | 1 | 8 |
| 27000 | C | 8 | 38600 | 8 | 6 | 43200 | 1 | 9 |
| 27200 | C | 9 | 38700 | 8 | 7 | 43400 | 1 | A |
| 27400 | C | A | 38800 | 8 | 8 | 43600 | 1 | B |
| 27600 | F | 0 | 38900 | 8 | 9 | 43800 | 1 | C |
| 27800 | F | 1 | 39000 | 8 | A | 44000 | 1 | D |
| 28000 | F | 2 | 39100 | 8 | B | 44200 | 1 | E |
| 28200 | F | 3 | 39200 | 8 | C | 44400 | 1 | F |
| 28400 | F | 4 | 39300 | 8 | D | 44600 | 2 | 0 |
| 28600 | F | 5 | 39400 | 8 | E | 44800 | 2 | 1 |
| 28800 | F | 6 | 39500 | 8 | F | 45000 | 2 | 2 |
| 29000 | F | 7 | 39600 | 9 | 0 | 45200 | 2 | 3 |
| 29200 | F | 8 | 39700 | 9 | 1 | 45400 | 2 | 4 |
| 29400 | F | 9 | 39800 | 9 | 2 | 45600 | 2 | 5 |
| 29600 | F | A | 39900 | 9 | 3 | 45800 | 2 | 6 |

Table 7 – Matrix 0 - Digital K-Factor Settings (continued)

Note: The Digital K-Factor Settings for SW1 and SW2 are the same for SW3 and SW4 respectively.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 10-5

| <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 46000 | 2 | 7 | 57700 | A | 7 | 93000 | 7 | 2 |
| 46200 | 2 | 8 | 57800 | A | 8 | 94000 | 7 | 3 |
| 46400 | 2 | 9 | 57900 | A | 9 | 95000 | 7 | 4 |
| 46600 | 2 | A | 58000 | A | A | 96000 | 7 | 5 |
| 46800 | 2 | B | 58100 | A | B | 97000 | 7 | 6 |
| 47000 | 2 | C | 58200 | A | C | 98000 | 7 | 7 |
| 47200 | 2 | D | 58300 | A | D | 99000 | 7 | 8 |
| 47400 | 2 | E | 58400 | A | E | 100000 | 7 | 9 |
| 47600 | 2 | F | 58500 | A | F | 101000 | 7 | A |
| 49000 | 9 | 8 | 58600 | B | 0 | 102000 | 7 | B |
| 49100 | 9 | 9 | 58700 | B | 1 | 103000 | 7 | C |
| 49200 | 9 | A | 58800 | B | 2 | 104000 | 7 | D |
| 49300 | 9 | B | 58900 | B | 3 | 105000 | 7 | E |
| 49400 | 9 | C | 60000 | B | 4 | 106000 | 7 | F |
| 49500 | E | 2 | 77000 | 0 | 0 | | | |
| 49700 | E | 3 | 78000 | 0 | 1 | | | |
| 50000 | E | 4 | 79000 | 0 | 2 | | | |
| 50200 | E | 5 | 80000 | 0 | 3 | | | |
| 50400 | E | 6 | 81000 | 0 | 4 | | | |
| 50500 | E | 7 | 82000 | 0 | 5 | | | |
| 50800 | E | 8 | 83000 | 0 | 6 | | | |
| 55500 | C | 3 | 84000 | 0 | 7 | | | |
| 55550 | F | F | 85000 | 0 | 8 | | | |
| 57000 | A | 0 | 86000 | 0 | 9 | | | |
| 57100 | A | 1 | 87000 | 0 | A | | | |
| 57200 | A | 2 | 88000 | 0 | B | | | |
| 57300 | A | 3 | 89000 | 0 | C | | | |
| 57400 | A | 4 | 90000 | 0 | D | | | |
| 57500 | A | 5 | 91000 | 0 | E | | | |
| 57600 | A | 6 | 92000 | 0 | F | | | |

Table 7 – Matrix 0 - Digital K-Factor Settings (continued)

Note: The Digital K-Factor Settings for SW1 and SW2 are the same for SW3 and SW4 respectively.

INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY

Rev: T

Page: 10-6

| <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> | <u>PPG</u> | <u>SW1</u> | <u>SW2</u> |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 200 | 1 | 0 | 1940 | 8 | 0 | 16100 | 4 | E |
| 400 | 1 | 1 | 2000 | 3 | D | 16300 | 4 | F |
| 440 | 1 | 2 | 2200 | 3 | E | 16500 | 5 | 0 |
| 490 | 1 | 3 | 2400 | 3 | F | 16600 | 5 | 1 |
| 510 | 1 | 4 | 2600 | 4 | 0 | 16800 | 5 | 2 |
| 520 | 1 | 5 | 2800 | 4 | 1 | 17000 | 5 | 3 |
| 530 | 1 | 6 | 3000 | 4 | 2 | 17200 | 5 | 4 |
| 540 | 1 | 7 | 3200 | 4 | 3 | 17400 | 5 | 5 |
| 550 | 1 | 8 | 3400 | 4 | 4 | 17600 | 5 | 6 |
| 560 | 1 | 9 | 3600 | 4 | 5 | 17800 | 5 | 7 |
| 570 | 1 | A | 3610 | 0 | 0 | 30600 | 6 | 3 |
| 580 | 1 | B | 3650 | 0 | 1 | 30800 | 6 | 4 |
| 590 | 1 | C | 3690 | 0 | 2 | 31000 | 6 | 5 |
| 600 | 1 | D | 3730 | 0 | 3 | 31200 | 6 | 6 |
| 610 | 1 | E | 3760 | 0 | 4 | 31400 | 6 | 7 |
| 620 | 1 | F | 3800 | 0 | 5 | 31600 | 6 | 8 |
| 630 | 2 | 0 | 3800 | 4 | 6 | 31800 | 6 | 9 |
| 640 | 2 | 1 | 3840 | 0 | 6 | 32000 | 6 | A |
| 650 | 2 | 2 | 3880 | 0 | 7 | 32200 | 6 | B |
| 660 | 2 | 3 | 3920 | 0 | 8 | 32400 | 6 | C |
| 670 | 2 | 4 | 3960 | 0 | 9 | 32600 | 6 | D |
| 680 | 2 | 5 | 4000 | 0 | A | 32800 | 6 | E |
| 690 | 2 | 6 | 4000 | 4 | 7 | 33000 | 6 | F |
| 700 | 2 | 7 | 4040 | 0 | B | 33200 | 7 | 0 |
| 710 | 2 | 8 | 4080 | 0 | C | 33400 | 7 | 1 |
| 720 | 2 | 9 | 4120 | 0 | D | 33600 | 7 | 2 |
| 730 | 2 | A | 4160 | 0 | E | 34000 | 7 | 3 |
| 740 | 2 | B | 4200 | 0 | F | 34200 | 7 | 4 |
| 750 | 2 | C | 4200 | 4 | 8 | 34400 | 7 | 5 |
| 760 | 2 | D | 4400 | 4 | 9 | 34600 | 7 | 6 |
| 770 | 2 | E | 4700 | 4 | A | 34800 | 7 | 7 |
| 780 | 2 | F | 11700 | 5 | 8 | 35000 | 7 | 8 |
| 790 | 3 | 0 | 11900 | 5 | 9 | 35200 | 7 | 9 |
| 800 | 3 | 1 | 12100 | 5 | A | 35400 | 7 | A |
| 810 | 3 | 2 | 12400 | 5 | B | 35600 | 7 | B |
| 820 | 3 | 3 | 12600 | 5 | C | 35800 | 7 | C |
| 840 | 3 | 4 | 12800 | 5 | D | 36000 | 7 | D |
| 850 | 3 | 5 | 13000 | 5 | E | 36400 | 7 | E |
| 880 | 3 | 6 | 13500 | 5 | F | 36800 | 7 | F |
| 900 | 3 | 7 | 14000 | 6 | 0 | | | |
| 1000 | 3 | 8 | 14200 | 6 | 1 | | | |
| 1200 | 3 | 9 | 14400 | 6 | 2 | | | |
| 1400 | 3 | A | 15500 | 4 | B | | | |
| 1600 | 3 | B | 15700 | 4 | C | | | |
| 1800 | 3 | C | 15900 | 4 | D | | | |



Table 8 – Matrix 1 - Alternate Digital K-Factor Setting (software version 93.00.61+)

Note: The Digital K-Factor Settings for SW1 and SW2 are the same for SW3 and SW4 respectively.

**INSTALLATION MANUAL
FUEL/AIR DATA COMPUTER
P/N 962830-XY**

SECTION 11.0

**INSTALLATION DRAWINGS AND
INSTALL KIT PARTS LISTS**

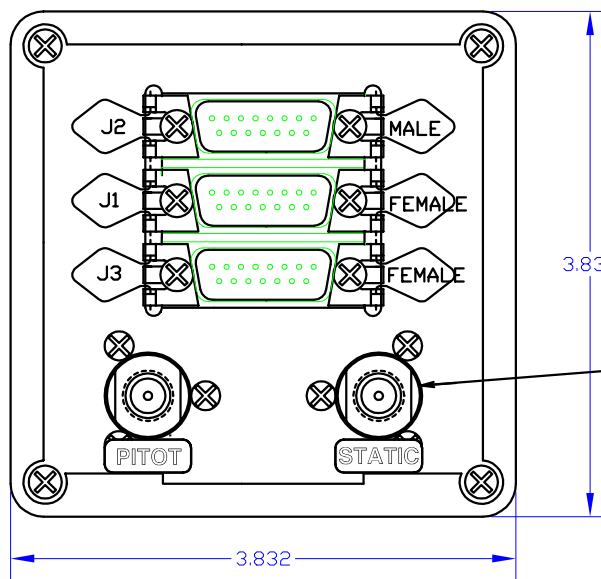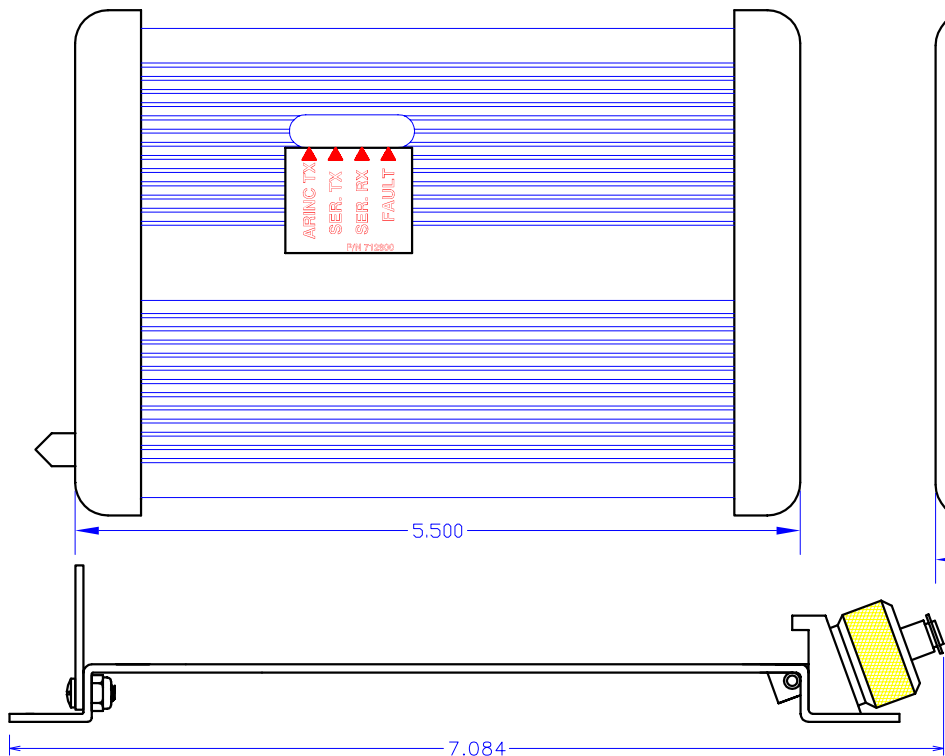

MATING CONNECTORS:

- P1, P3
 230051 - CONN, SHELL, MALE
 230054 - CONN, PINS, MALE
 230038 - CONN, HOOD, 15 PIN

- P2
 230050 - CONN, SHELL, FEMALE
 230055 - CONN, PINS, FEMALE
 230038 - CONN, HOOD, 15 PIN

FEMALE, 1/8-NPTF (2)

J2 PINOUT

1. 12 - 28v DC POWER INPUT
2. NC
3. RX+, RS-422 *
4. RX-, RS-422 *
5. RX, RS-232 *
6. TX, RS-232 *
7. TX, ARINC429 A
8. TX, ARINC429 B
9. GROUND
10. NC
11. TX+, RS-422 *
12. TX-, RS-422 *
13. NC
14. SIGNAL GND
15. NC

J3 PINOUT

1. NC
2. NC
3. NC
4. NC
5. NC
6. NC
7. NC
8. NC
9. NC
10. NC
11. NC
12. NC
13. NC
14. NC
15. NC



* USE RS-232 OR RS-422, NOT BOTH

J1 PINOUT

1. FUEL FLOW RIGHT - POWER
2. FUEL FLOW RIGHT - SIGNAL
3. GROUND
4. HEADING Y
5. HEADING X
6. 26V 400Hz, H
7. 26V 400Hz, Z, C
8. BARD. WIPER
9. FUEL FLOW LEFT - POWER
10. FUEL FLOW LEFT - SIGNAL
11. GROUND
12. BARD. (+)
13. BARD. (-)
14. DAT - (Signal)
15. DAT + (+5V)

| | | | |
|------------------------------|---|-----------|--------------|
| DRAWING DATE 9-22-94 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER DAP | INSTALLATION DWG, ADC2000, DIGITAL FUEL FLOW | | |
| APPROVED SES | DRAWING NO. 4028-394 | SIZE A | P/N 962830-1 |
| FILE NAME 962830-1E.J.DWG | DRAWING NO. 4028-394 | | REV. E |
| DIRECTORY 962830 | DRAWING NO. 4028-394 | | REV. E |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---|
| 0501/032 | E | 3/21/05 | PAB | WMP | UPDATED TITLE BLOCK; CH TITLE; CORR PITOT/STC LABEL LOCNS |
| 9803/054 | D | 3/26/98 | SRB | KCL | CORRECT J1 DES. FOR PIN 3 AND PIN 11 |
| 9706/017 | C | 6-9-97 | WMP | KCL | UPDATE J3 |
| 9505/014 | B | 5-11-95 | WMP | SES | ADD SPRING LATCH CLIPS |
| 9412/005 | A | 12-7-94 | DAP | SES | BASELINE RELEASE |

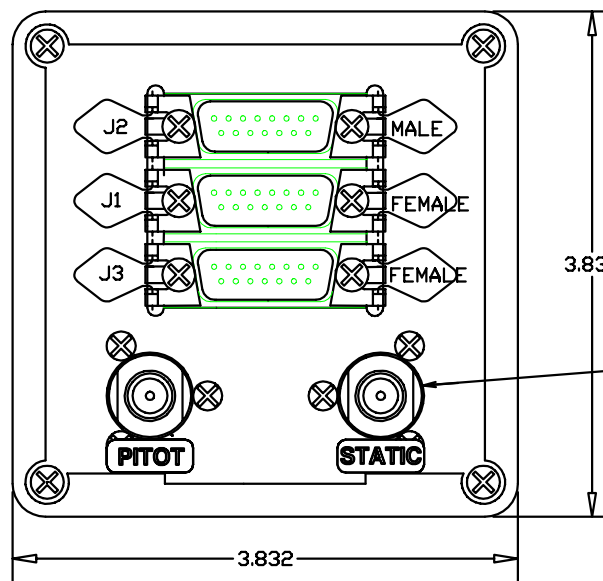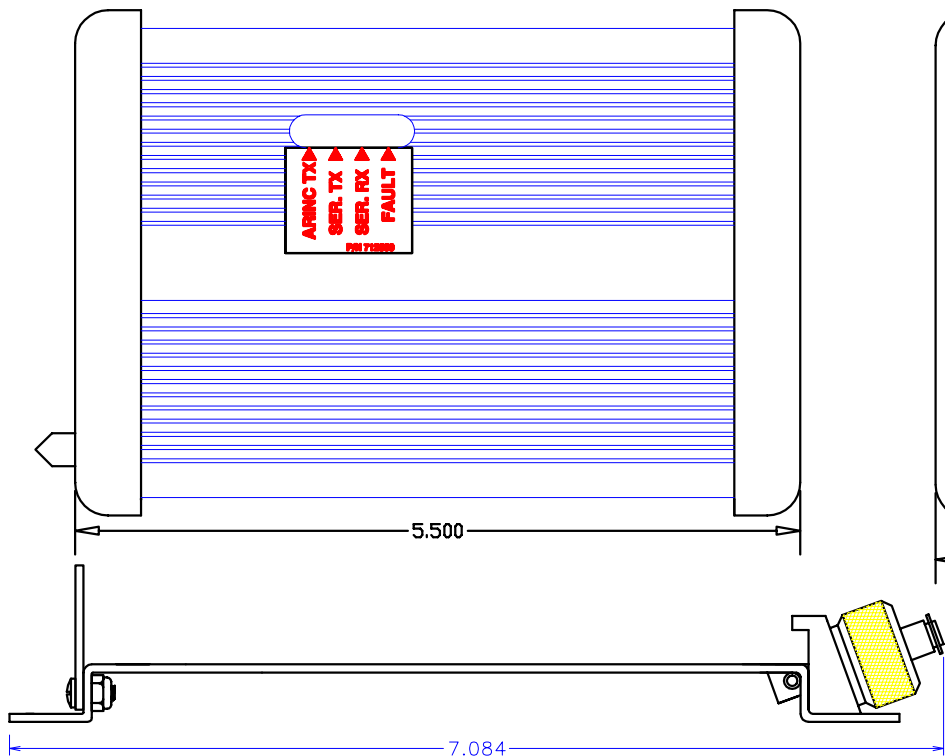

MATING CONNECTORS:

- P1, P3
 230051 - CONN, SHELL, MALE
 230054 - CONN, PINS, MALE
 230038 - CONN, HOOD, 15 PIN

- P2
 230050 - CONN, SHELL, FEMALE
 230055 - CONN, PINS, FEMALE
 230038 - CONN, HOOD, 15 PIN

FEMALE, 1/8-NPTF (2)

J2 PINOUT

1. 12 - 28v DC POWER INPUT
2. NC
3. RX+, RS-422 *
4. RX-, RS-422 *
5. RX, RS-232 *
6. TX, RS-232 *
7. TX, ARINC429 A
8. TX, ARINC429 B
9. GROUND
10. NC
11. TX+, RS-422 *
12. TX-, RS-422 *
13. NC
14. SIGNAL GND
15. NC

J3 PINOUT

1. NC
2. NC
3. NC
4. NC
5. NC
6. NC
7. NC
8. NC
9. NC
10. NC
11. NC
12. NC
13. NC
14. NC
15. NC



* USE RS-232 OR RS-422, NOT BOTH

J1 PINOUT

1. FUEL FLOW RIGHT (-)
2. FUEL FLOW RIGHT (+)
3. GROUND
4. HEADING Y
5. HEADING X
6. 26V 400Hz, H
7. 26V 400Hz, Z, C
8. BARD. WIPER
9. FUEL FLOW LEFT (-)
10. FUEL FLOW LEFT (+)
11. GROUND
12. BARD. (+)
13. BARD. (-)
14. DAT - (Signal)
15. DAT + (+5V)

| | | | |
|--|--|-----------|--------------|
| DRAWING DATE 9-22-94 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER DAP | INSTALLATION DWG, ADC2000, SINE FUEL FLOW | | |
| APPROVED SES | DRAWING NO. 4028-431 | SIZE A | P/N 962830-2 |
| FILE NAME 962830-2DJ.DWG DIRECTORY 962830 | REV. D | | |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---|
| 0501/032 | D | 3/21/05 | PAB | WMP | UPDATED TITLE BLOCK, CH TITLE, CORR PITOT/STC LABEL LOCNS |
| 9706/017 | C | 6-9-97 | WMP | KCL | UPDATE J3 |
| 9505/028 | B | 5/17/95 | DAP | SES | REVERSE FF POLARITY |
| 9505/014 | A | 5-11-95 | WMP | SES | ADD SPRING LATCH CLIPS |
| 9412/005 | - | 12-7-94 | DAP | SES | BASELINE RELEASE |

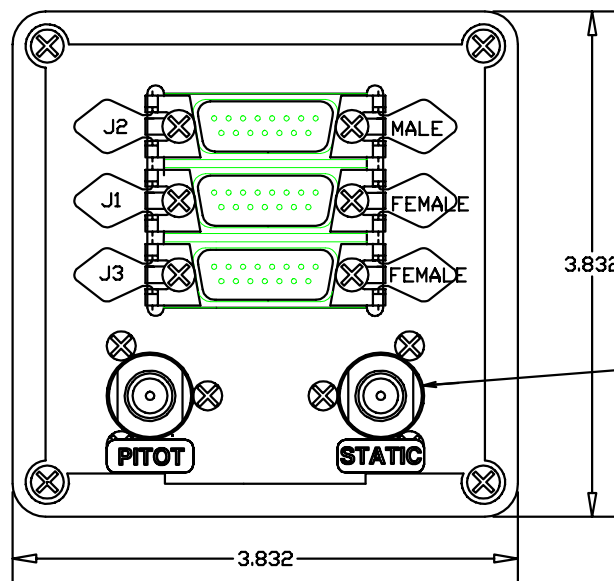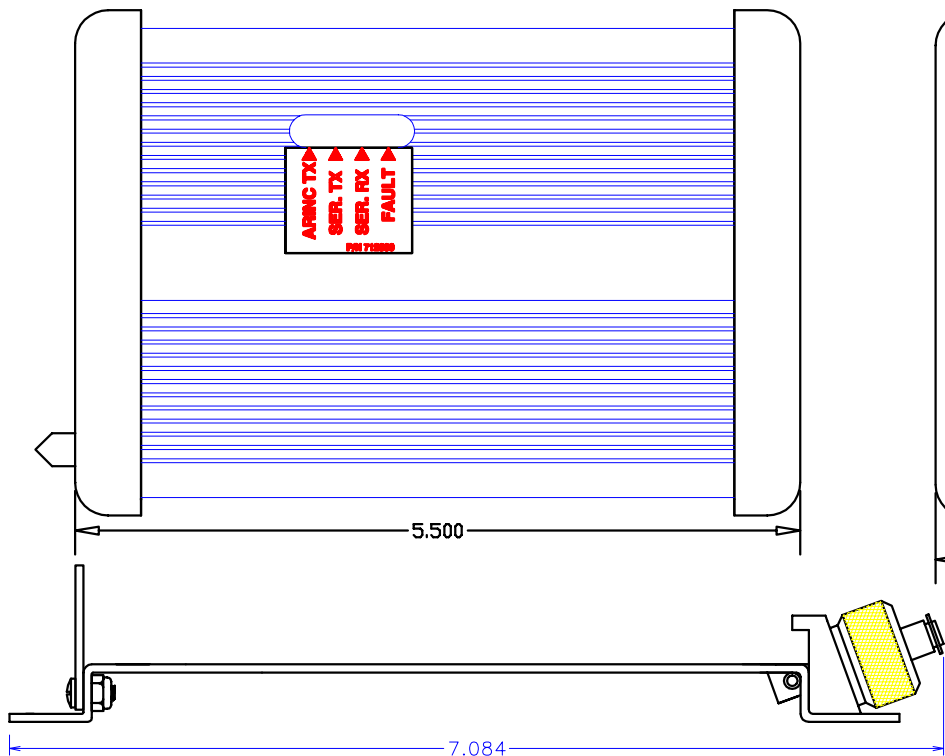

MATING CONNECTORS:

- P1, P3
 230051 - CONN, SHELL, MALE
 230054 - CONN, PINS, MALE
 230038 - CONN, HOOD, 15 PIN

- P2
 230050 - CONN, SHELL, FEMALE
 230055 - CONN, PINS, FEMALE
 230038 - CONN, HOOD, 15 PIN

FEMALE, 1/8-NPTF (2)

- | | |
|----------------------------|------------------|
| J2 PINOUT | J3 PINOUT |
| 1. 12 - 28v DC POWER INPUT | 1. NC |
| 2. NC | 2. NC |
| 3. RX+, RS-422 * | 3. NC |
| 4. RX-, RS-422 * | 4. NC |
| 5. RX, RS-232 * | 5. NC |
| 6. TX, RS-232 * | 6. NC |
| 7. TX, ARINC429 A | 7. NC |
| 8. TX, ARINC429 B | 8. NC |
| 9. GROUND | 9. NC |
| 10. NC | 10. NC |
| 11. TX+, RS-422 * | 11. NC |
| 12. TX-, RS-422 * | 12. NC |
| 13. NC | 13. NC |
| 14. SIGNAL GND | 14. NC |
| 15. NC | 15. NC |

* USE RS-232 OR RS-422, NOT BOTH


- J1 PINOUT**
1. FUEL FLOW RIGHT (-)
 2. FUEL FLOW RIGHT (+)
 3. GROUND
 4. HEADING Y
 5. HEADING X
 6. 26V 400Hz, H
 7. 26V 400Hz, Z, C
 8. BARD. WIPER
 9. FUEL FLOW LEFT (-)
 10. FUEL FLOW LEFT (+)
 11. GROUND
 12. BARD. (+)
 13. BARD. (-)
 14. DAT - (Signal)
 15. DAT + (+5V)

| | | | | | |
|----------|------|---------|-----|-------|---|
| 0501/032 | D | 3/21/05 | PAB | WMP | UPDATED TITLE BLOCK; CH TITLE; CORR PITOT/STC LABEL LOCNS |
| 9706/017 | C | 6-9-97 | WMP | KCL | UPDATE J3 |
| 9505/018 | B | 5/17/95 | DAP | SES | REVERSE FF POLARITY |
| 9505/014 | A | 5-11-95 | WMP | SES | ADD SPRING LATCH CLIPS |
| 9412/005 | - | 12-7-94 | DAP | SES | BASELINE RELEASE |
| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |


| | | | |
|-----------------------------|--|-----------|--------------|
| DRAWING DATE 9-22-94 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER DAP | INSTALLATION DWG, ADC2000, DC FUEL FLOW | | |
| APPROVED SES | DRAWING NO. 4028-432 | SIZE A | P/N 962830-3 |
| FILE NAME 962830-3DJ.DWG | DIRECTORY 962830 | | REV. D |

NOTES:


1. REFERENCE P/N 681201-1 DAT PROBE ASSEMBLY KIT
2. AVOID INSTALLING DAT PROBE IN OR NEAR:
 PROP AIRSTREAM
 ENGINE EXHAUST FLOW PATH
 CABIN HEATERS EXHAUST FLOW PATH
 TRANSMITTING ANTENNAS (DME, TXP, COMM.)
 DARK PAINTED AREAS

 DAT PROBE, P/N 681201

 TORQUE NUT, FN 25, TO 1.3 IN-LBS (MAX)

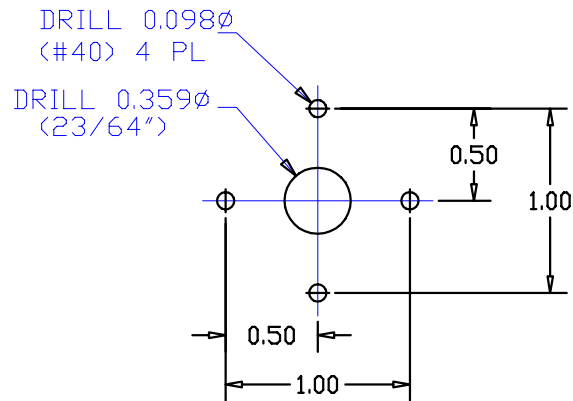


DETAIL A
MOUNTING HOLE DETAIL

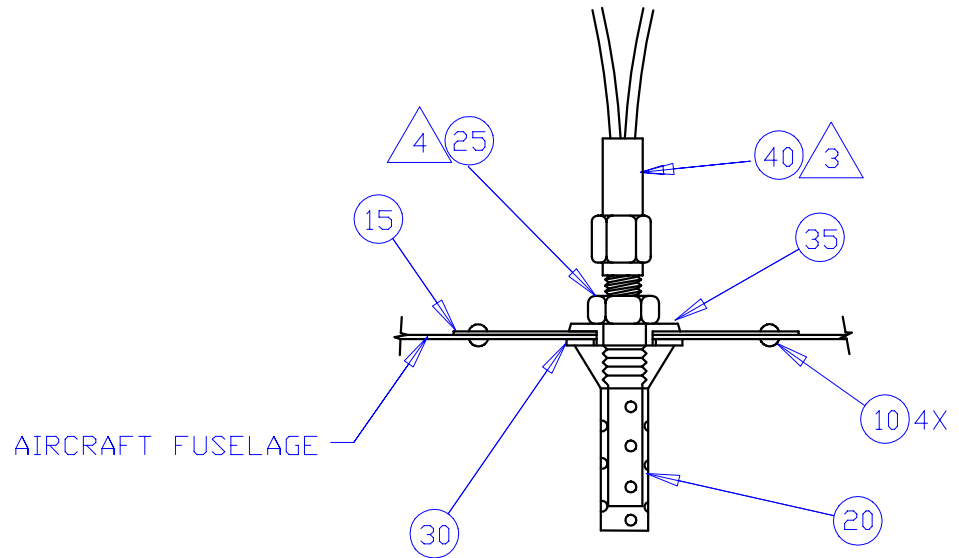

| | | | | | |
|----------|------|----------|-----|-------|--|
| 0501/032 | C | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK & NOTE 4; ADDED "KIT" TO TITLE |
| 0111/001 | B | 11/14/01 | PAB | KCL | STANDARDIZED DWG FORMAT TO MIMIC DWG NO. 4012-177 |
| 0002/036 | A | 3/11/96 | WMP | PG | CONVERT TO CAD; ADD NOTES 1 AND 3 |
| N/A | - | 4/8/91 | DAP | SES | BASELINE RELEASE |
| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |

| | | | | | |
|---|----------------------------|---|--------|-------------|-------|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES: ±0.01 | DRAWING DATE: 4/8/91 | SHADIN MINNEAPOLIS, MN 55426 | | | |
| | DRAFTER: DAP | | | | |
| FINISH: N/A | APPROVED: SES | INSTALLATION, DAT PROBE ASSEMBLY KIT | | | |
| MATERIAL: N/A | FILE NAME: 681201-1C.J.DWG | | | | |
| SCALE: NONE | DIRECTORY: 681201-1 | DRAWING NO. 4028-005 | SIZE A | P/N681201-1 | REV C |
| | SHEET 1 OF 1 | | | | |

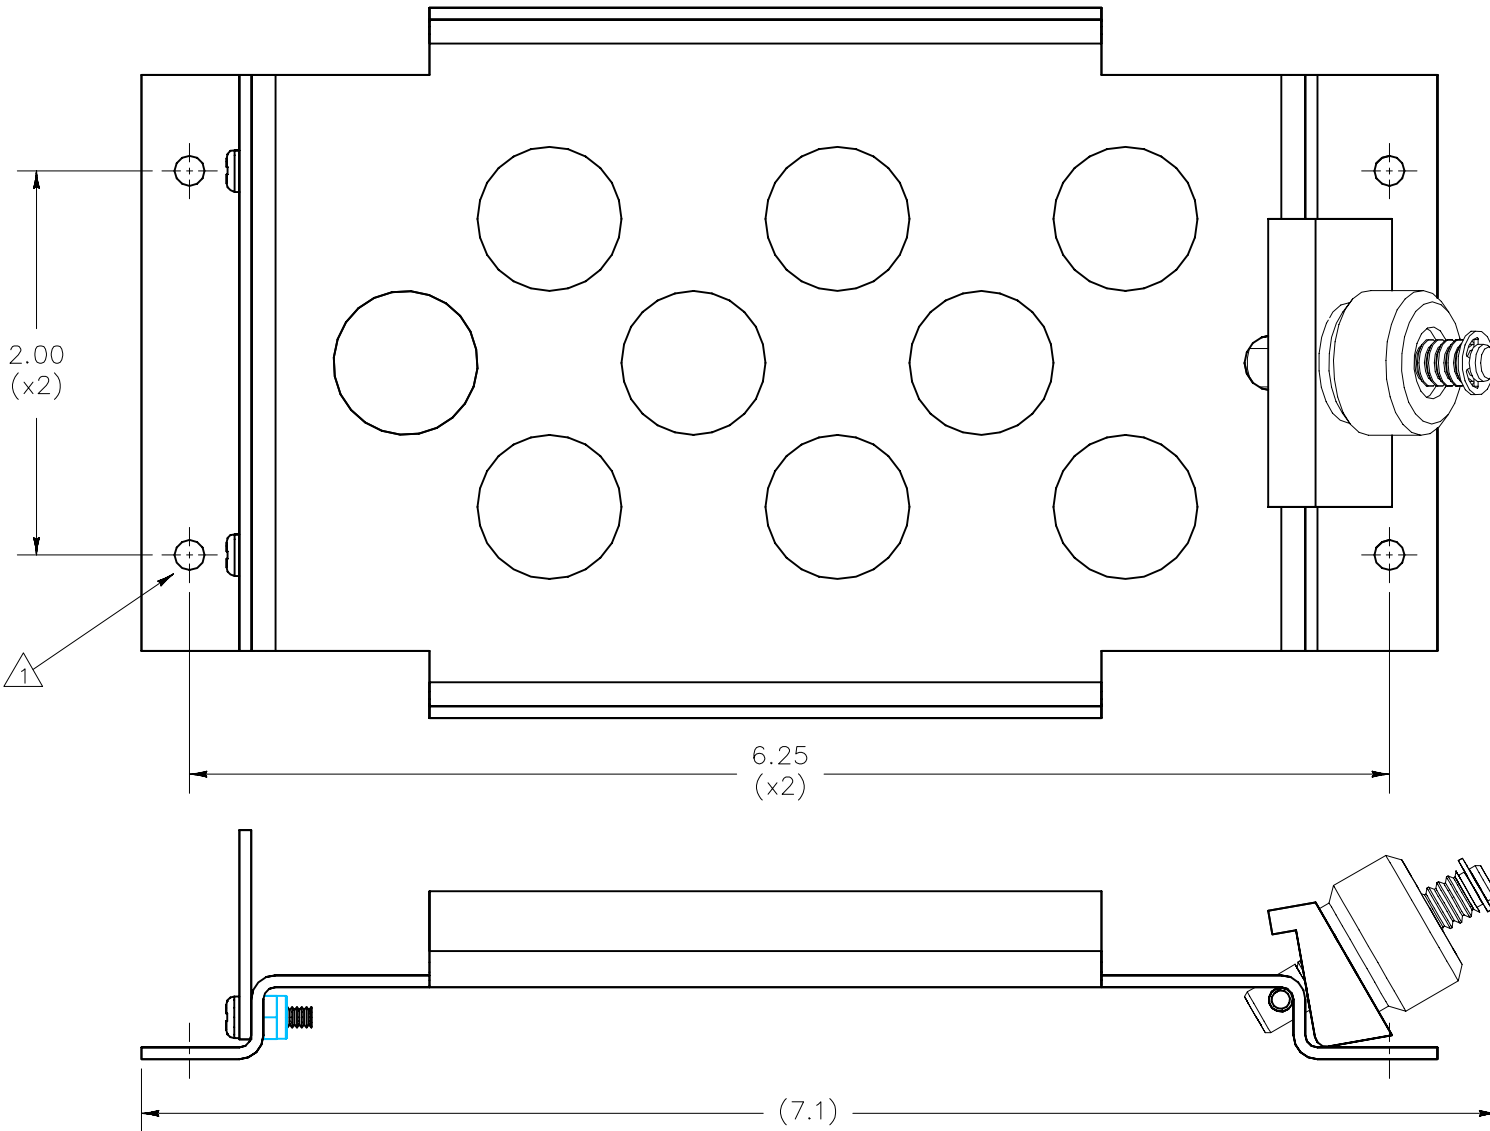


NOTES:

- 1. USE #6 MOUNTING HARDWARE.
- 2. (DELETED).
- 3. USE THIS DRAWING TO INSTALL SHADIN P/N 612826B, 612826A, OR 612826 MOUNTING TRAY.

| ECO # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|----------|-----|-------|--|
| 0507/053 | C | 8/1/05 | PAB | ZK | CH. NOTE 3 |
| 0501/032 | B | 3/3/05 | PAB | WMP | DELETED NOTE 2 & 10 DIMENSIONS; ADDED NOTE 3 |
| 0211/047 | A | 2/7/03 | PAB | BAL | ADDED DIMENSIONS |
| 9512/017 | - | 12/13/95 | WMP | SES | BASELINE RELEASE |

| | |
|---|--|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES: X.X - ±0.1 X/X ± 1/64 X.XX - ±0.01 ∠ - ±1° X.XXX - ±0.005 | DRAWING DATE 9/22/94 |
| FINISH: N/A | DRAFTER FAB |
| MATERIAL: N/A | APPROVED SES |
| SCALE: 1 : 1 | FILE NAME 4028-395CJ.DWG DIRECTORY 4028 |
| | SHEET 1 OF 1 |


| | | | |
|---|-----------|--------------|----------|
| SHADIN MINNEAPOLIS, MN 55426 | | | |
| INSTALLATION, MOUNTING TRAY, ADC2000 | | | |
| DRAWING NO. 4028-395 | SIZE A | P/N ----- | REV C |

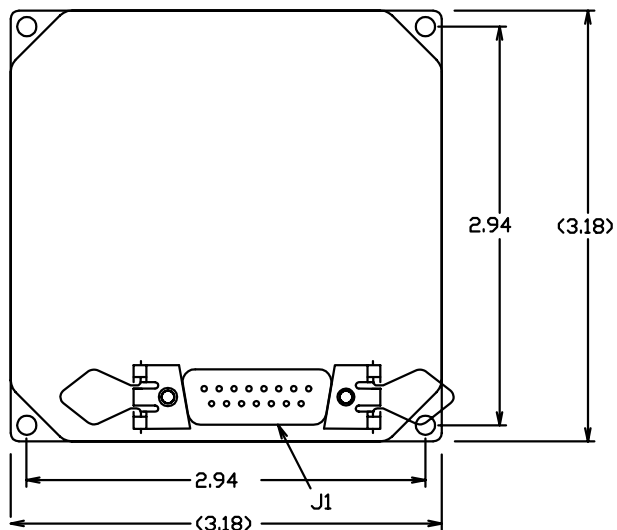

1. THE CONVERTER CAN BE MOUNTED IN ANY ORIENTATION
2. 4" SPACING IS REQUIRED ABOVE CONNECTOR
3. NO COOLING IS REQUIRED
4. THE CONVERTER CAN BE INSTALLED IN A PRESSURIZED OR NON-PRESSURIZED AREA, PROVIDING TEMPERATURE DOES NOT DROP BELOW -20°C
5. 1 AMP CIRCUIT BREAKER IS REQUIRED
6. NO SHOCK MOUNT REQUIRED
7. USE HARDWARE PROVIDED IN INSTALL KIT P/N IK9337 TO ASSEMBLE MATING CONNECTOR.

MATING CONNECTOR:

SHADIN P/N 230036, 17-DA15S
 SHADIN P/N 230038, HOOD: # DA-24658 15 PIN MALE CONNECTOR

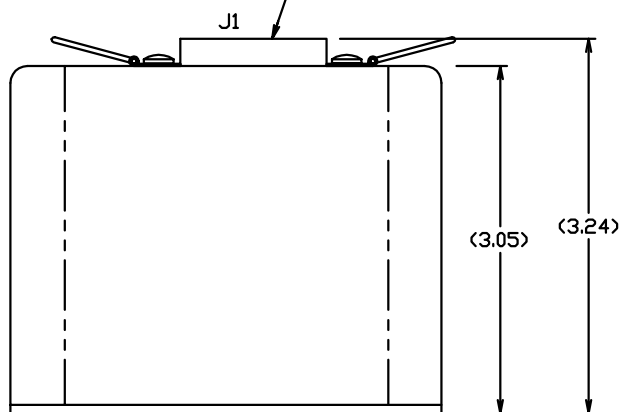

CONNECTOR KEY

| PIN | FUNCTION |
|-----|------------------------------|
| 1 | RS232 OR RS422 SELECT |
| 2 | TWIN OR SINGLE ENGINE SELECT |
| 3 | N.C. |
| 4 | N.C. |
| 5 | N.C. |
| 6 | N.C. |
| 7 | SELECT POWER (OUTPUT) |
| 8 | +14 TO 28 V DC POWER IN |
| 9 | N.C. |
| 10 | SIGNAL GROUND |
| 11 | RS422 RX+ |
| 12 | RS422 RX- |
| 13 | RS232 RX |
| 14 | RS232 TX, TO ARGUS 5000/7000 |
| 15 | POWER GND |

SEE SELECTOR TABLE

FROM SHADIN ADC
(USE RS-232 OR RS-422, NOT BOTH)

SELECTOR TABLE

| |
|---|
| RS232 RX : TIE J1:7 TO J1:1 |
| RS422 RX : DEFAULT (NO JUMPER REQ'D) |
| SINGLE ENGINE : J1:7 TO J1:2 |
| TWIN ENGINE : DEFAULT (NO JUMPER REQ'D) |


WEIGHT: 8 oz.
 POWER CONSUMPTION:
 210 ma. @ 28v DC

| ECO # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|----------|-----|-------|--|
| 0501/032 | B | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK; "CONVERTER" WAS "TXMTR" |
| 9801/025 | A | 10/12/98 | DMD | PG | ADDED NOTE 7, CORRECTED HEIGHT, PROVIDED SHADIN P/N FOR MATING CONN. |
| 9707/023 | - | 7/15/97 | PAB | PG | BASELINE RELEASE |

| | | | | |
|--|----------------------------------|--|-----------|---------------|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES: X.X = ±0.1 X.XX = ±0.01 | DRAWING DATE 7/14/97 | SHADIN MINNEAPOLIS, MN 55426 | | |
| | DRAFTER PAB APPROVED PG | | | |
| FINISH: N/A | FILE NAME 937000-03B.DWG | INSTALLATION, SERIAL TO ARGUS 5000/7000 CONVERTER | | |
| MATERIAL: N/A | DIRECTORY 937000-03 | DRAWING NO. 4070-005 | SIZE A | P/N 937000-03 |
| SCALE: NONE | SHEET 1 OF 1 | REV B | | |


LEVEL FF INTERFACE OPTION

962830-1
962820-1

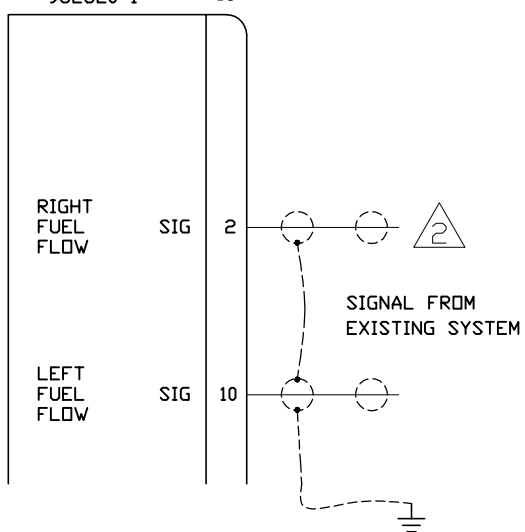


FREQUENCY FF INTERFACE OPTION

962830-1
962820-1

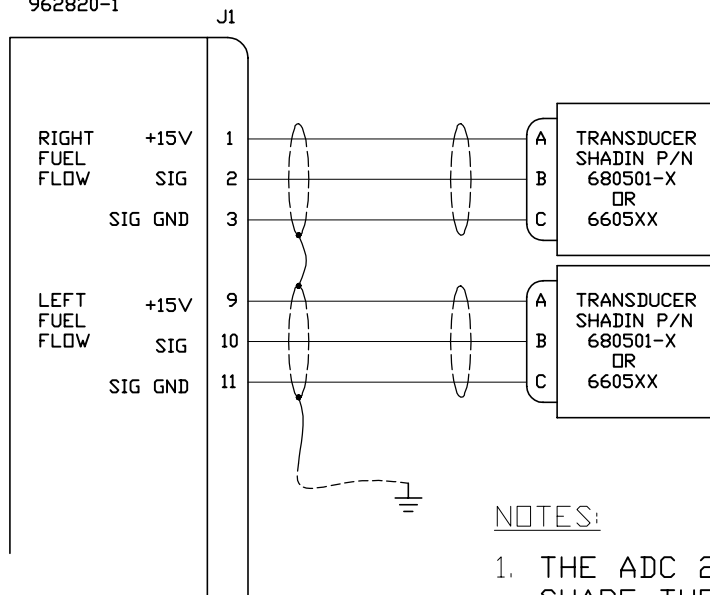


SINE FUEL FLOW OPTION

962830-2
962820-2

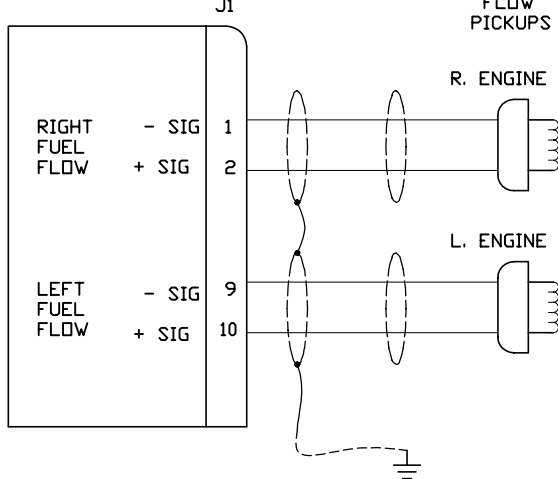

D.C. FUEL FLOW OPTION

962830-3
962820-3

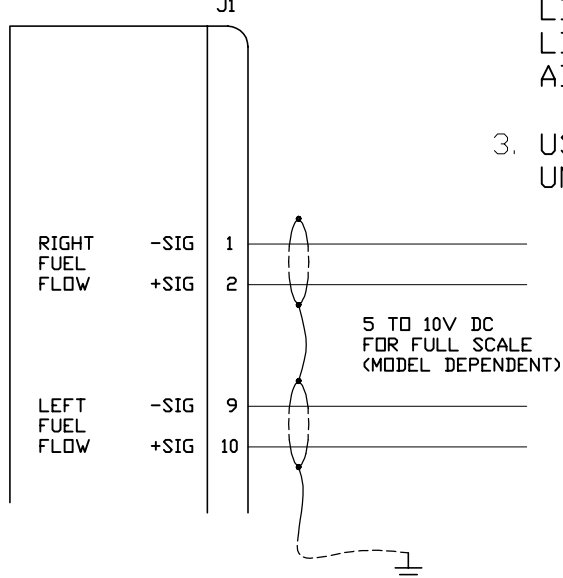

NOTES:

- THE ADC 200 AND ADC 2000 D-SUB CONNECTOR SHARE THE SAME FUEL FLOW PIN LOCATIONS.
- WHEN INSTALLING TO ANY EXISTING FREQUENCY FUEL FLOW TRANSDUCER, USE ONLY THE SIGNAL LINE. DO NOT CONNECT POWER AND GROUND LINES. THIS COULD DAMAGE THE ADC AND OR AIRCRAFT INSTRUMENTS.
- USE SHIELDED WIRE BUT GROUND ONLY ON ADC UNIT END TO PREVENT A GROUND LOOP.


| | | |
|------------------------------|-------------------------------------|-----------|
| DRAWING DATE 12/6/94 | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER DAP | INSTALLATION WIRING, FUEL/AIRDATA | |
| APPROVED SES | COMPUTER ADC 200/ADC 2000 TO | |
| FILE NAME 4028-423B.J.DWG | FUEL SYSTEMS | |
| DIRECTORY 4028 | DRAWING NO. 4028-423 | SIZE A |
| ECD # | P/N | ----- |
| REV. | | B |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|--|
| 0211/047 | B | 3/11/03 | PAB | BAL | REMOVED GNDS; ADDED NOTES & ADC 200 TO TITLE |
| 9505/028 | A | 5/17/95 | DAP | SES | CORRECT SINE FF LABELING |
| 9412/005 | - | 12/7/94 | DAP | SES | BASELINE RELEASE |

SCALE: NONE

SHEET 1 OF 1

962830-X

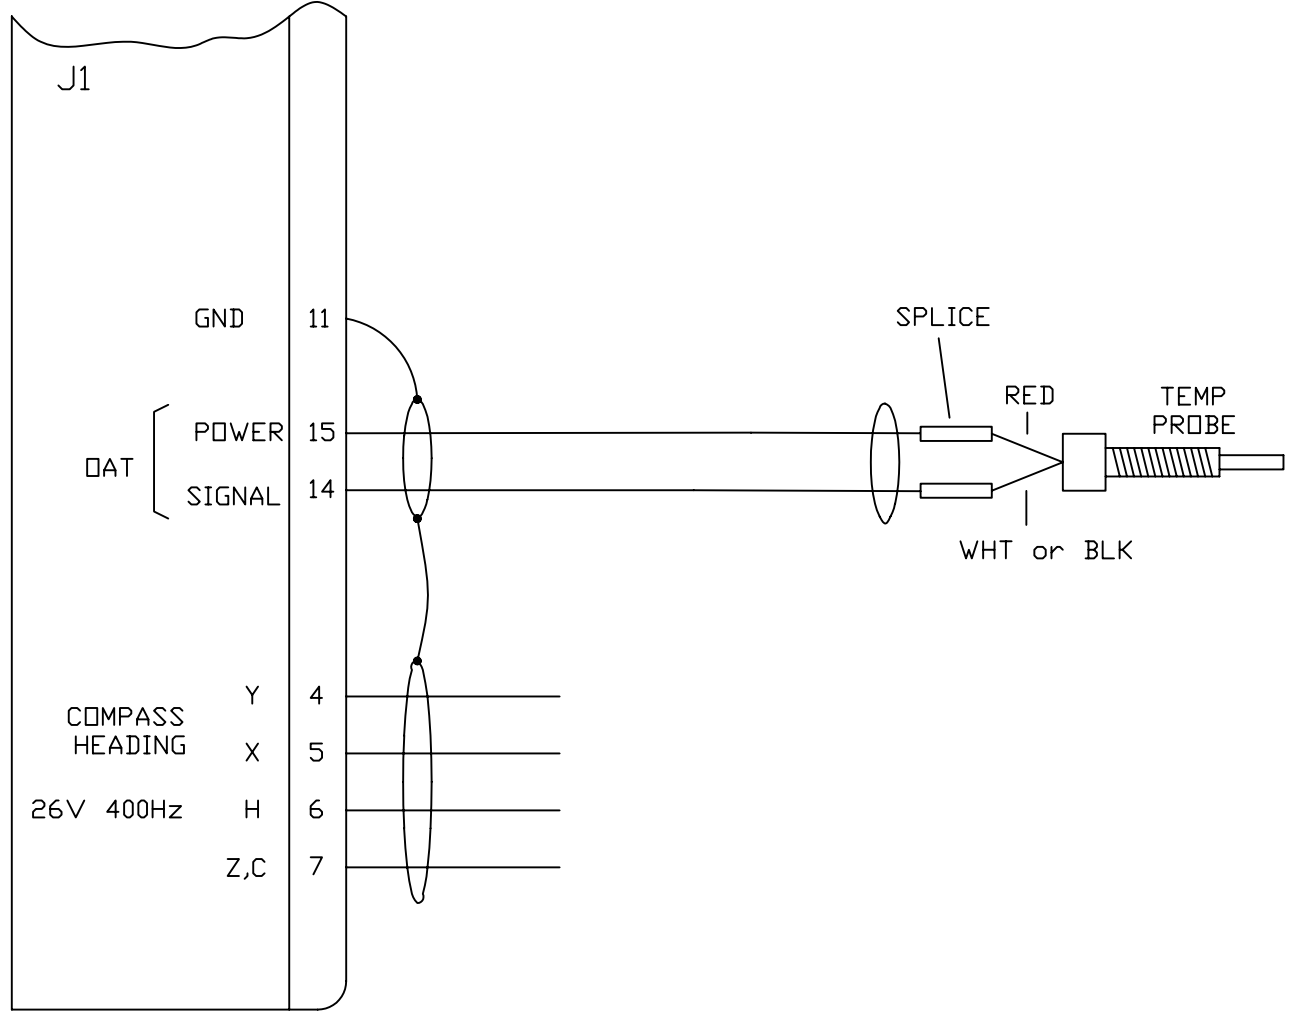

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---------------------|
| 0703/007 | B | | PAB | | ADDED PIN 11 |
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK |
| 9412/005 | - | 12/7/94 | DAP | SES | BASELINE RELEASE |


| FILE NAME | DIRECTORY | SCALE |
|----------------|-----------|-------|
| 4028-425BJ.DWG | 4028 | NONE |

| | |
|-----------------|----------|
| DRAWING DATE | 12/6/94 |
| DRAFTER | DAP |
| APPROVED | SES |
| MINNEAPOLIS, MN | 55426 |
| DRAWING NO. | 4028-425 |
| SHEET | 1 OF 1 |



| | |
|-----------------|----------|
| MINNEAPOLIS, MN | 55426 |
| DRAWING NO. | 4028-425 |
| SIZE | A |

| | | |
|--|-----|----------|
| INSTALLATION WIRING, FUEL/AIRDATA COMPUTER (ADC2000) TO DAT/HEADING SYSTEM | P/N | REV B |
|--|-----|----------|

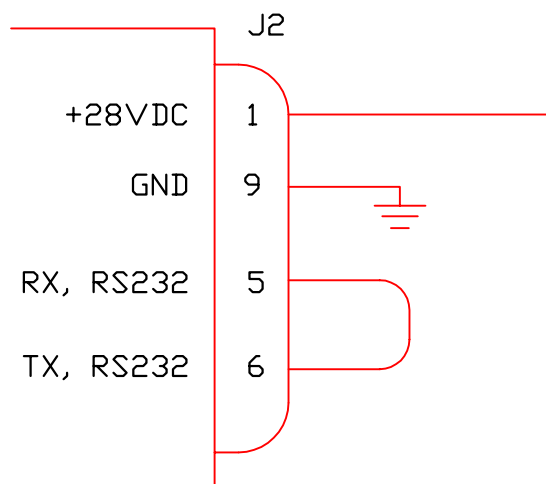


NOTES:

1. CONSULT INSTALLATION MANUAL FOR F/ADC PROGRAMMING INSTRUCTIONS.
2. MATING CONNECTOR: 15 PIN FEMALE D-SUB (SHADIN PN 230050C) OR EQUIVALENT

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---|
| 0509/028 | C | 9/19/05 | PAB | ZK | CORRECTED PIN OUT J2:5 & 6; EDITED NOTE 2 |
| 0501/032 | B | 2/14/05 | PAB | VMP | UPDATED TITLE BLOCK |
| 9809/022 | A | 9/28/98 | DLR | KCL | CORRECTED PIN OUT |
| 9803/025 | - | 3-26-98 | SRB | KCL | BASELINE RELEASE |

NOT TO SCALE

| | | | |
|------------------------------|--|--|-------|
| DRAWING DATE 3/25/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER SRB | | INSTALLATION WIRING, LOOP BACK HARNESS FOR F/ADC200, 2000, D-SUB CONNECTOR | |
| APPROVED KCL | | | |
| FILE NAME 4028-944C.J.DWG | | DRAWING NO. | SIZE |
| DIRECTORY 4028 | | 4028-944 | A |
| SHEET 1 OF 1 | | P/N | _____ |
| | | REV | C |

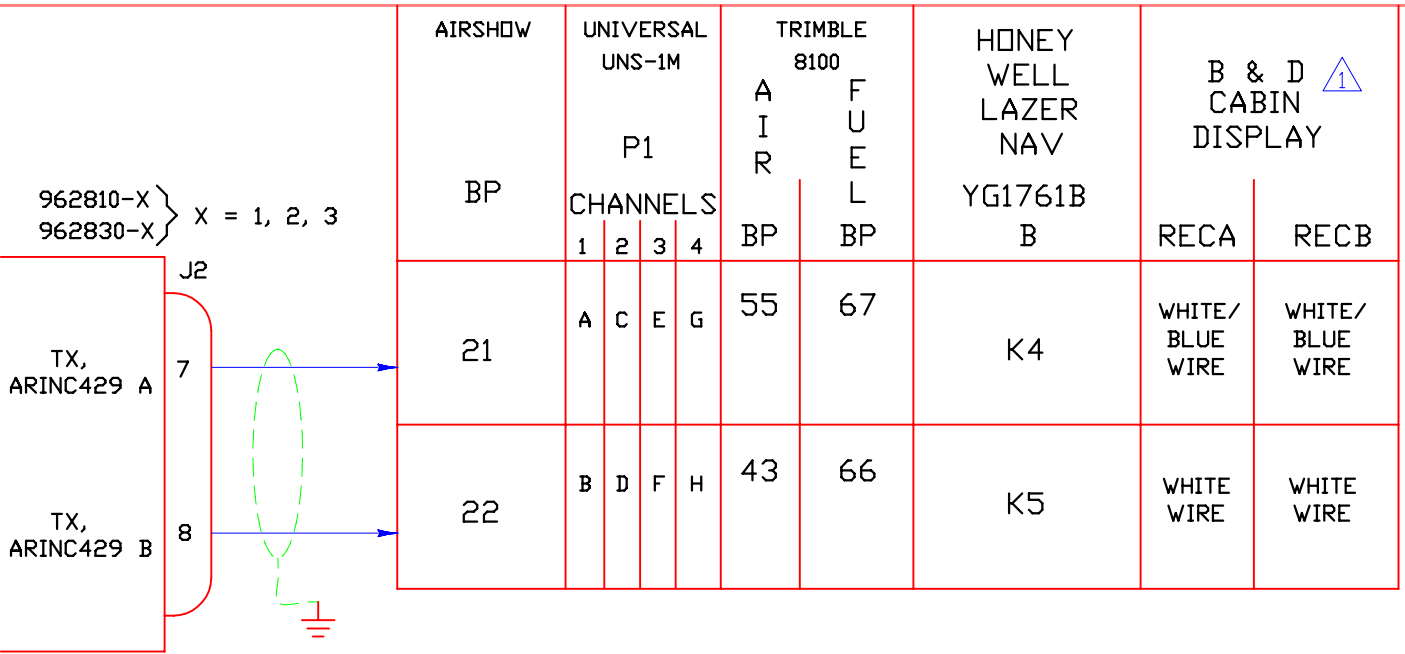

NOTES:

- FOR THE B & D CABIN DISPLAY THE ARINC 429 LABELS RECEIVED ARE DEPENDANT UPON THE WAY THE B & D WAS BUILT, NOT SHADIN. ALSO THE P/N OF THE B & D INDICATES IF IT IS SET UP FOR RECEIVE A OR RECEIVE B. FOR EXAMPLE, P/N 2700-X XX YY ZZ X XXXXX. IF YY = F \emptyset , THEN REC A. IF ZZ = F \emptyset , THEN REC B.
- THERE MAY BE OTHER TYPES OF EQUIPMENT THAT WILL USE ARINC 429 LABELS.

| | | |
|-----------------------------|-------------------------------------|-----------|
| DRAWING DATE 3/25/98 | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER SRB | INSTALLATION WIRING, ADC2000 | |
| APPROVED KCL | TO NAV RECEIVERS ARINC 429 | |
| FILE NAME 4028-945A.JDWG | DRAWING NO. 4028-945 | SIZE A |
| DIRECTORY 4028 | P/N | REV A |


| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---|
| 0211/047 | A | 3/11/03 | PAB | BAL | ADDED NOTE 2, SHIELD, & GND; DEL 'F/' & '-200' FROM TITLE |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

NOT TO SCALE

SHEET 1 OF 1

962810-X }
 962820-X } X = 1, 2, 3
 962830-X }


| | TRIMBLE 1000, 2000, 3000 | TRIMBLE 2100, 2101, 3100 | NORTHSTAR M1A M2 M3 60/600 |
|----------|-----------------------------------|-----------------------------------|--|
| RX, SDA+ | RX, SDA+ | | N/A |
| 16 | 7 | | |
| RX, SDB- | RX, SDB- | | N/A |
| 4 | 8 | | |
| TX, SDA+ | TX, SDA+ | TX, SDA+ | |
| 15 | 37 | 11 | |
| TX, SDB- | TX, SDB- | TX, SDB- | |
| 3 | 5 | 6 | |

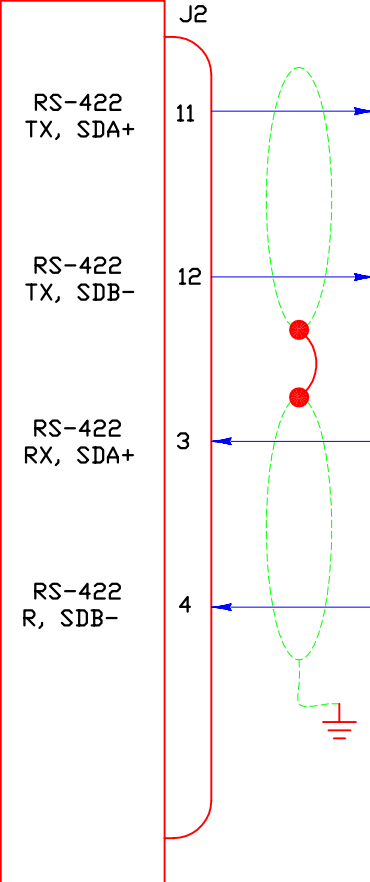

| | | | |
|------------------------------|-------------------------------------|------|-------------|
| DRAWING DATE 3/25/98 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER SRB | INSTALLATION WIRING, F/ADC200, 2000 | | |
| APPROVED KCL | TD NAV RECEIVERS W/RS-422, RS-485 | | |
| FILE NAME 4028-946A.J.DWG | DRAWING NO. | SIZE | REV |
| DIRECTORY 4028 | 4028-946 | A | P/N _____ A |
| SHEET 1 OF 1 | NOT TO SCALE | | |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|----------------------|
| 0211/047 | A | 3/11/03 | PAB | BAL | DEL PIN 9; ADDED GND |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

BENDIX/KING

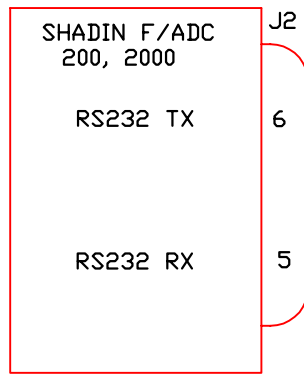

| | | |
|-----------|-------|--------|
| KLN90,A,B | KLN89 | KLN900 |
| P901 | P891 | P9002 |
| 36 | 1 | 38 |
| 13 | 2 | 6 |

| SHADIN FUEL FLOW METER | | | |
|------------------------|------------------------|-----------------------|-------------------------|
| DIGIFLO P/N 91053XT | DIGIFLO P/N 91053XP | MINIFLO P/N 91204X | MICROFLO 91204XT-38D |
| J | 5 | 6 | 6 |
| H | 12 | 9 | 9 |

NOTES:


1. CONFIGURE SHADIN F/ADC 200 I/O FOR FLOWMETER/BENDIX C.
2. CONFIGURE SHADIN F/ADC 2000 I/O FOR FLOWMETER/BENDIX C OR FLOWMETER/BENDIX D IF USING THE BARD-METRIC INTERFACE.
3. CONFIGURE SHADIN FUEL FLOW METER I/O FOR ON/AIRDATA.
4. FUEL FLOW TRANSDUCER SIGNAL(S) ARE CONNECTED TO THE SHADIN FUEL FLOW METER. NO FUEL SIGNAL CONNECTION TO THE ADC.
5. MINIMUM SOFTWARE LEVEL:
 DIGIFLO 60.10.77
 MINIFLO 60.01.77
 MICROFLO 60.08.77
 ADC 200/2000 93.XX.77

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|--|
| 0211/047 | A | 3/11/03 | PAB | BAL | ADDED NOTES 4 & 5; ADDED FUEL FLOW METER SW VERSIONS |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

| | | | |
|-----------------------------|--|-----------|-----------|
| DRAWING DATE 3/25/98 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER SRB | INSTALLATION WIRING, F/ADC200, 2000, SHADIN FUEL FLOW INDICATORS TO BENDIX/KING NAV. RECEIVER. | | |
| APPROVED KCL | DRAWING NO. 4028-947 | SIZE A | P/N _____ |
| FILE NAME 4028-947A.JDWG | REV A | | |
| DIRECTORY 4028 | SHEET 1 OF 1 | | |

NOT TO SCALE

F/ADC200, 2000
 P/N 962810-X
 P/N 962820-X } X = 1, 2, 3
 P/N 962830-X

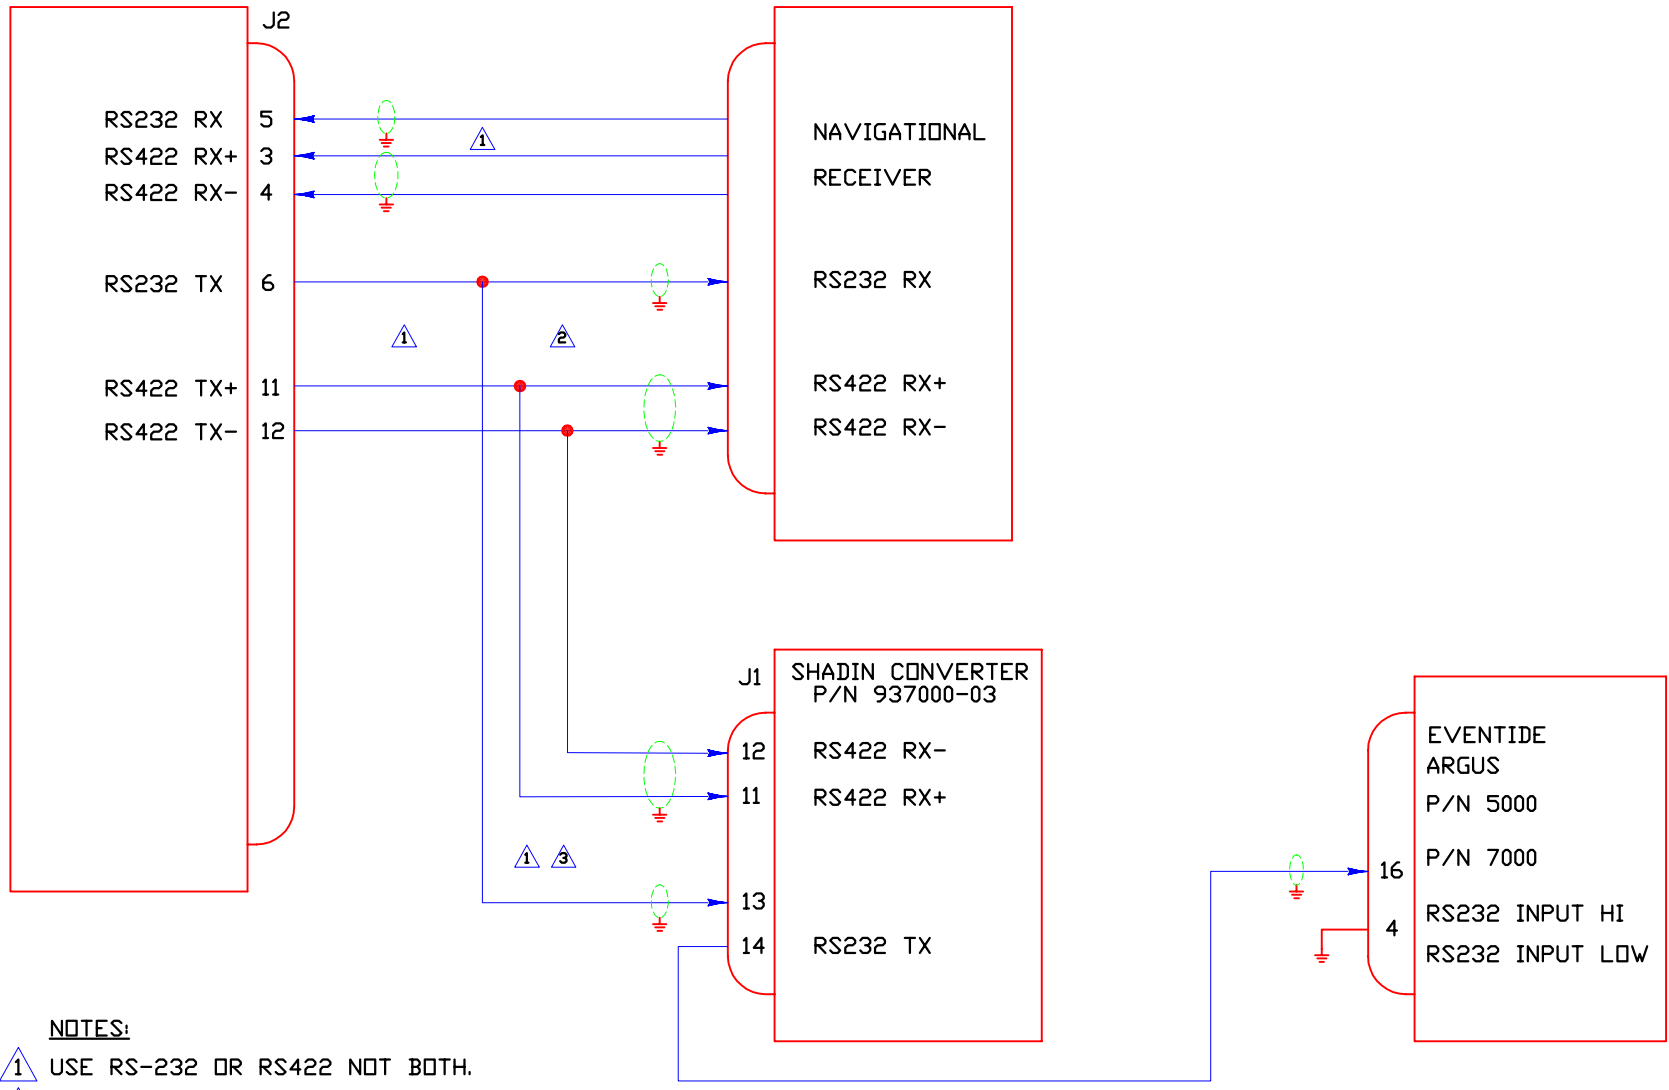

NOTES:

- 1 USE RS-232 OR RS422 NOT BOTH.
- 2 CONNECT SHADIN CONVERTER P/N 937000-03 IN PARALLEL WITH NAVIGATIONAL RECEIVERS SERIAL DATA INPUT.
- 3 CONSULT DRAWING NUMBER 4070-005 FOR WIRING AND STRAPPING INFORMATION.

| | | | |
|------------------------------|--|--|-------|
| DRAWING DATE 3/25/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER SRB | | INSTALLATION WIRING, F/ADC200, 2000 AND SHADIN CONVERTER TO EVENTIDE ARGUS | |
| APPROVED KCL | | | |
| FILE NAME 4028-948A.J.DWG | | DRAWING NO. | SIZE |
| DIRECTORY 4028 | | 4028-948 | A |
| SHEET 1 OF 1 | | P/N | _____ |
| | | REV | A |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---------------------|
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |


NOT TO SCALE

MANUFACTURING NOTES:

1. MATCH FONT STYLE AND SIZES. ALL OTHER DIMENSIONS AS SHOWN.
2. SWITCH SETTING BOX DIMENSIONS ARE AS FOLLOWS:
 WIDTH = .295
 HEIGHT = .200


APPLICATION NOTES:

- A. IF CONFIGURATION IS NECESSARY PRINT SWITCH SETTINGS IN SPACE PROVIDED. PRINT "N/A" WHEN SWITCHES ARE NOT USED.
 (MANUFACTURER IGNORE)

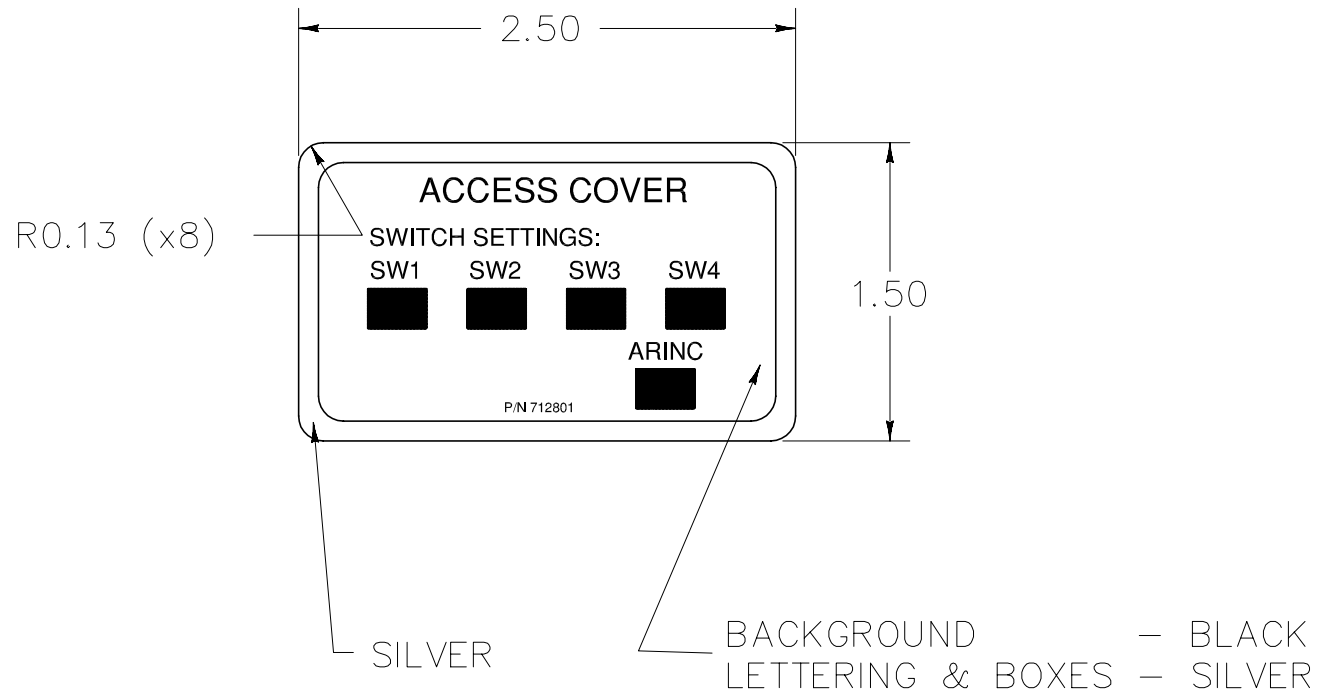

| | | | | | | | | | |
|--|------|---------|-----|-------|---------------------|--------------------------|--|---|--|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES | | | | | | DRAWING DATE 12/2/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| TOLERANCES: X.X - ±0.1 X.XX - ±0.01 X.XXX - ±0.005 | | | | | | DRAFTER PAB | | LABEL, ADC200/2000 ACCESS COVER | |
| FINISH: N/A | | | | | | APPROVED KCL | | | |
| MATERIAL: 3M 7983 | | | | | | FILE NAME 712801A.DWG | | DRAWING NO. 4028-A80 SIZE A P/N712801 | |
| SCALE: FULL | | | | | | DIRECTOR 71XXXX | | | |
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK | SHEET 1 OF 1 | | | |
| 9812/002 | - | 12/3/98 | PAB | KCL | BASELINE RELEASE | | | | |
| ECO # | REV. | DATE | BY | APP'D | DESCRIPTION | | | | |

P/N 962830-1
P/N 962830-2
P/N 962830-3



| | | | | | | | | | | | |
|------------------|---|-----|--------------------------|---|--|----------------------------------|--------------------------|-----------------|---------------------------|---------------------------|--------------------------|
| IDC 44929-935 | BENDIX/KING KEA130A, 346 -08 TO -11 | | IDC 28007-427 -429 | IDC 28704-A1001, -A2001, -A4001, -B4001, -C4001, -D1001, -D2001, -D4001, -E2101, -F2101, -495 | IDC 28711-621, -622, -623, -624 | IDC 28711-500, -600 SERIES | IDC 28007-431 -433 | SPERRY BA141 | IDC 28711-065, -066 | AEROSONIC 10420-11968E | IDC KTS B45152 10 410 |
| | 130A | 346 | | | | | | | | | |
| W | J1:A | S | a | d | T | T | a | X | g | L | v |
| U | J1:C | Z | c | f | V | V | c | Z | J | b | U |
| V | J1:B | Y | b | e | U | U | b | Y | h | J | w |



NOTES:

1. EXCITATION VOLTAGE USUALLY SUPPLIED BY AIRCRAFT HARNESS (<5-12 VDC), J1:12 TO EXCITATION, J1:13 TO GND.
2. EXCITATION VOLTAGE MAY BE SUPPLIED BY AIRCRAFT HARNESS (<5 VDC), J1:12 TO EXCITATION, J1:13 TO GND.
3. EXCITATION VOLTAGE SUPPLIED BY AIRCRAFT HARNESS (<-10VDC) J1:13 TO EXCITATION, J1:12 TO GND.
4. J1:15 (+5VDC DAT POWER) MAY BE USED FOR EXCITATION.
5. MAXIMUM DIFFERENTIAL INPUT VOLTAGE BETWEEN BARD (+) AND BARD (-) IS ±12VDC.

| | | |
|------------------------------|-------------------------------------|-----------|
| DRAWING DATE 12/14/98 | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER DLR | INSTALLATION WIRING, ADC 2000, | |
| APPROVED KCL | D-SUB CONN, TO ALTIMETER BARD POT | |
| FILE NAME 4028-AB2C.J.DWG | DRAWING NO. 4028-AB28 | SIZE A |
| DIRECTORY 4028 | P/N----- | REV C |
| SHEET 1 OF 1 | SCALE: NONE | |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|----------|-----|-------|--|
| 0211/047 | C | 3/11/03 | PAB | BAL | DEL PIN 11; ADDED GND |
| 0011/003 | B | 11/2/00 | PAB | KCL | KEA 346 WAS *J1:A, J1:C, & J1:B* RESPECTIVELY; ADD IDC P/N *KTS B45152 10 410* |
| 0007/031 | A | 7/19/00 | PAB | RH | *Y* IN SPERRY LABEL WAS *V* |
| 9812/001 | - | 12/14/98 | DLR | KCL | BASELINE RELEASE |

GARMIN

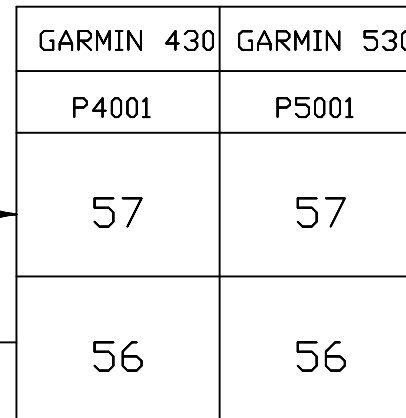

| SHADIN FUEL FLOW METER | | | |
|------------------------|------------------------|-----------------------|-------------------------|
| DIGIFLO P/N 91053XT | DIGIFLO P/N 91053XP | MINIFLO P/N 91204X | MICROFLO 91204XT-38D |
| J | 5 | 6 | 6 |
| H | 12 | 9 | 9 |

NOTES:

1. CONFIGURE SHADIN F/ADC 200/2000 I/O FOR FLOWMETER/GARMIN G.
2. CONFIGURE SHADIN FUEL FLOW METER I/O FOR ON/AIRDATA.
3. CONFIGURE GARMIN 430/530 I/O FOR CHANNEL 1 TO SHADIN FADC/AVIATION.
4. MINIMUM SOFTWARE LEVEL

| | |
|--------------|----------|
| ADC 200/2000 | 93.XX.77 |
| GARMIN 430 | 2.17 |
| GARMIN 530 | 2.02 |
| DIGIFLO-L | 60.10.84 |
| MINIFLO-L | 60.01.83 |
| MICROFLO-L | 60.08.86 |
5. FUEL FLOW TRANSDUCER SIGNAL(S) ARE CONNECTED TO THE SHADIN FUEL FLOW METER. NO FUEL SIGNAL CONNECTED TO THE ADC.

| | | | | | |
|----------|------|---------|-----|-------|---|
| 1104/005 | B | 4/29/11 | HWL | ZK | CHANGED SOFTWARE LEVEL IN NOTE 4 |
| 0211/047 | A | 3/11/03 | PAB | BAL | CHANGED TABLE TO NOTE 4; ADDED NOTE 5; UPDATED SW VERSIONS OF FLOW METERS |
| 0008/028 | - | 9/12/00 | PAB | EDJ | BASELINE RELEASE |
| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |

| |
|----------------------------|
| DRAWING DATE 8/21/00 |
| DRAFTER PAB |
| APPROVED EDJ |
| FILE NAME 4028-B94B.DWG |
| DIRECTORY 4028 |

SHADIN AVIONICS
MINNEAPOLIS, MN 55426

| | |
|---|-----------|
| INSTALLATION WIRING, F/ADC200, 2000, SHADIN FUEL FLOW INDICATORS TO GARMIN 430/530 | |
| DRAWING NO. 4028-B94 | SIZE A |
| P/N _____ | REV B |

NOT TO SCALE

Report: 4032D
ECO Date: April 4, 2007
Rev: H
Sec.: IX
Page 1 of 1

ECO #: 0704/002
Release date: 4-6-07
Approved: ZK

PARTS LIST

Part #: **681201-1**

Drawing #: 4028-005 Rev C

Description: **OAT PROBE ASSEMBLY KIT**

| <u>FN</u> | <u>P/N</u> | <u>QTY.</u> | <u>DESCRIPTION</u> | <u>MFG.</u> | <u>MFG.#</u> | <u>DESIGNATION</u> | <u>COMMENTS</u> |
|-----------|------------|-------------|---------------------------------|-------------|--------------|--------------------|-----------------|
| 10 | 511201 | 4 | RIVET, AN4703-4 or MS20470AD3-4 | | | | |
| 15 | 543216 | 1 | OAT STIFFENER RING | SHA | 4032-082 | | |
| 20 | 670503 | 1 | SHIELD, Temp Sensor Assy | SHA | 4005-265 | | |
| 25 | 670504 | 1 | NUT, Temp Sensor | SHA | 4005-266 | | |
| 30 | 670505 | 1 | WASHER, Flat OAT | SHA | 4005-303 | | |
| 35 | 670506 | 1 | WASHER, Shoulder OAT | SHA | 4005-304 | | |
| 40 | 681201 | 1 | OAT PROBE | SHA | 4005-794 | | |

10 items

Report: N/A
 ECO Date: March 15, 2007
 Rev: D
 Sec.: IX
 Page 1 of 1

PARTS LIST


Part #: **IK9630-1**

Drawing #: N/A

Description: **INSTALL KIT, ADC2000**

| <u>FN</u> | <u>P/N</u> | <u>QTY.</u> | <u>DESCRIPTION</u> | <u>MFG.</u> | <u>MFG.#</u> | <u>DESIGNATION</u> | <u>COMMENTS</u> |
|-----------|------------|-------------|---|-------------|-------------------------------|--------------------|-----------------|
| 15 | 612826A | 1 | TRAY, Mounting, ADC-2000 | SHA | 4028-T54 | | |
| 20 | 230019H-1 | 6 | SPRING LATCH CLIP | SHA | 4028-074 | | |
| 25 | 230050C | 1 | CONN, 15Pin, D-Sub, F Crimp, w/Contacts | POS | M24308/2-2 (RD15F10000-50) | | |
| 30 | 230051C | 2 | CONN, 15 Pin, D-Sub M Crimp, w/Contacts | POS | M24308/4-2 (RD15M10000-50) | | |
| 35 | 230038 | 3 | CONN, Hood 15 Pin D Sub | CIN | DA-24658 | | |
| 40 | 511002 | 6 | SCREW, 4-40 x 1/4" Phil Pan HD SS | MCM | 91772A106 | | |
| 45 | 512007 | 6 | NUT, 4-40 3/16 x 1/16 SS | AFT | HNSP188 04C000 | | |
| 50 | 541001 | 6 | WASHER, #4 Split Lock SS | MCM | 92147A005 | | |

31 items

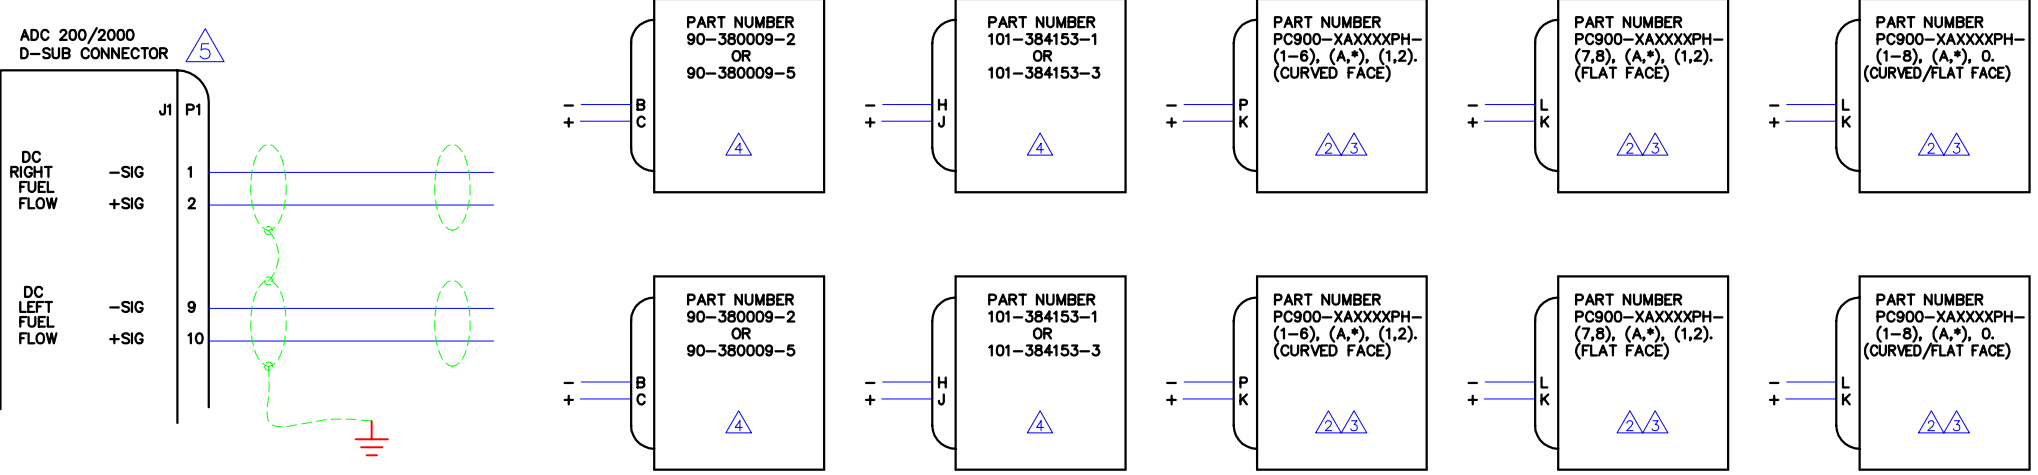

NOTES:

1. THIS SCHEMATIC IS USED FOR KNOWN BEECH KING AIR MODELS. SOME INDICATORS ARE NOT LISTED BUT MAY BE INTERFACED. CALL SHADIN TECH SUPPORT IF YOU DO NOT SEE THE PART NUMBER OF YOUR INDICATOR LISTED. INDICATOR PART NUMBERS POSSESSING A PREFIX OF "PC900-" ARE XOTECHNOLOGIES TYPE INDICATORS. THE LAST DIGIT REPRESENTS THE INDICATOR AUXILIARY RATE OUTPUT (1 NUMBER). SHADIN SUPPORTS THE "-1" MODELS ONLY.
2. XOTECHNOLOGIES INDICATOR P/N PC900-XAXXXXPH-XX0 IS NOT SUPPORTED. THE AUXILIARY RATE OUTPUT OF THIS UNIT IS 0-1 mA. INDICATOR P/NS THAT END WITH A "-XX2" WILL ENCOUNTER A DEGRADATION IN PERFORMANCE DUE TO THE AUX. RATE OUTPUT OF 0-5.333 VDC. INDICATOR P/NS ENDING WITH AN "*" ARE UNKNOWN.
3. THE FOLLOWING XOTECHNOLOGIES INDICATOR P/NS POSSESS A K-FACTOR KNOWN TO SHADIN:

| PART NUMBER | K-FACTOR/OFFSET | AUX RATE OUTPUT | ADC200/2000 SWITCH SETTINGS | | | |
|------------------|-----------------|-----------------|-----------------------------|-----|-----|-----|
| | | | SW1 | SW2 | SW3 | SW4 |
| PC900-1A0600-XX1 | 38,460/0 | 0-5 VDC | 0 | 4 | 0 | 0 |
| PC900-1A0750-XX1 | 30,770/0 | 0-5 VDC | 0 | 5 | 0 | 0 |
| PC900-1A0800-XX1 | 28,850/0 | 0-5 VDC | 0 | 6 | 0 | 0 |

4. THE FOLLOWING BEECH INDICATOR P/NS POSSESS A K-FACTOR KNOWN TO SHADIN:

| PART NUMBER | K-FACTOR/OFFSET | ADC200/2000 SWITCH SETTINGS | | | |
|--------------|-----------------|-----------------------------|-----|-----|-----|
| | | SW1 | SW2 | SW3 | SW4 |
| 90-380009-2 | 77,000/416 | 0 | 0 | 0 | 1 |
| 90-380009-5 | 77,000/416 | 0 | 0 | 0 | 1 |
| 101-384153-1 | 30,777/0 | 0 | 5 | 0 | 0 |
| 101-384153-3 | 30,777/0 | 0 | 5 | 0 | 0 |

5. THE J1 CONNECTOR OF THE ADC 200 AND ADC 2000 HAVE THE SAME FUEL FLOW PIN LOCATIONS.


6. USE SHIELDED WIRE BUT GROUND ONLY ON ADC UNIT END TO PREVENT A GROUND LOOP.

| | | | |
|------------------------|---|-------------------------|-----------|
| DRAWING DATE 6/9/97 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER PAB | INSTALLATION WIRING, F/ADC 200/2000 W/ ANALOG F.F. TO BEECH KING AIR INDICATORS D-SUB CONNECTOR | | |
| APPROVED KCL | FILE NAME 4028-818BJ.DWG | DRAWING NO. 4028-818 | SIZE A |
| ECO # | REV. | DATE | BY |
| 9803/022 | A | 3/26/98 | SRB |
| 9706/007 | - | 6/13/97 | PAB |
| ECO # | REV. | DATE | BY |
| | | | |
| SHEET 1 OF 1 | | REV B | |

| ECO # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|--|
| 0211/047 | B | 3/11/03 | PAB | BAL | UPDATED NOTES 1-6; CORRECTED TITLE; GROUNDED SHIELDS |
| 9803/022 | A | 3/26/98 | SRB | KCL | CHANGED NOTE 3 : 90-380009-5 FRO 26,150/416, REMOVE P/N 9628X0-3 |
| 9706/007 | - | 6/13/97 | PAB | KCL | BASELINE RELEASE |

SCALE: NONE

AIRCRAFT'S FUEL FLOW
SIGNAL CONDITIONER
(P/N 45AS86801-003).

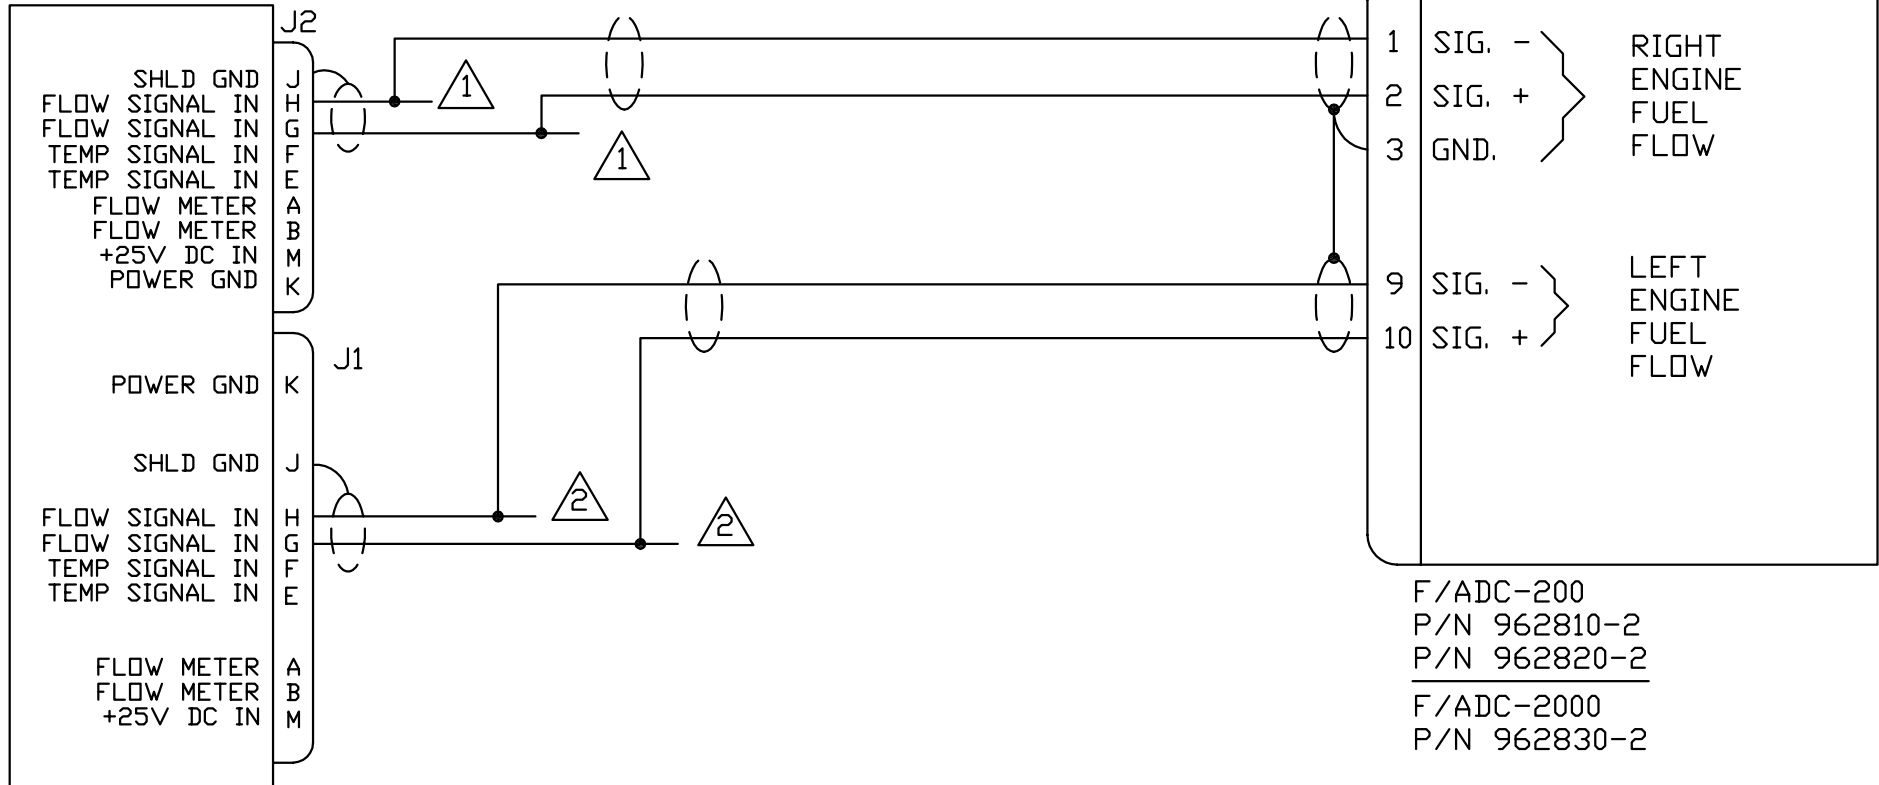

NOTES

- ① FROM RIGHT ENGINE FF TRANSMITTER.
- ② FROM LEFT ENGINE FF TRANSMITTER.
- ③ F/ADC SWITCH SETTINGS

F/ADC-200
P/N 962810-2
P/N 962820-2
F/ADC-2000
P/N 962830-2

SIG COND. P/N
45AS86801-003

K-FACTOR SW1 SW2 SW3 SW4
5150 PPG 6 E 6 E



| | | |
|-----------------------------|--------------------------------------|---------------------|
| DRAWING DATE 12/17/97 | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER DMD | INSTALLATION WIRING, F/ADC 200, 2000 | |
| APPROVED KCL | SINE FF TO MITSUBISHI MU-300 AND | |
| FILE NAME 4028-819BJ.DWG | MODEL 400 BEECHJET | |
| DIRECTORY 4028 | DRAWING NO. 4028-819 | SIZE A P/N _____ |
| | | REV B |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|--|
| 0501/032 | B | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK |
| 9803/025 | A | 3/26/98 | SRB | KCL | CHANGE TITLE, CHANGE FILE NAME FROM 4028-819-DWG |
| 9711/021 | - | 1-8-98 | DMD | KCL | BASELINE RELEASE |


DO NOT SCALE

SHEET 1 OF 1

NOTES

- ① FROM RIGHT ENGINE FF TRANSMITTER.
- ② FROM LEFT ENGINE FF TRANSMITTER.

SIGNAL COND.
P/N PC-620-0098 OR PC-425-0098

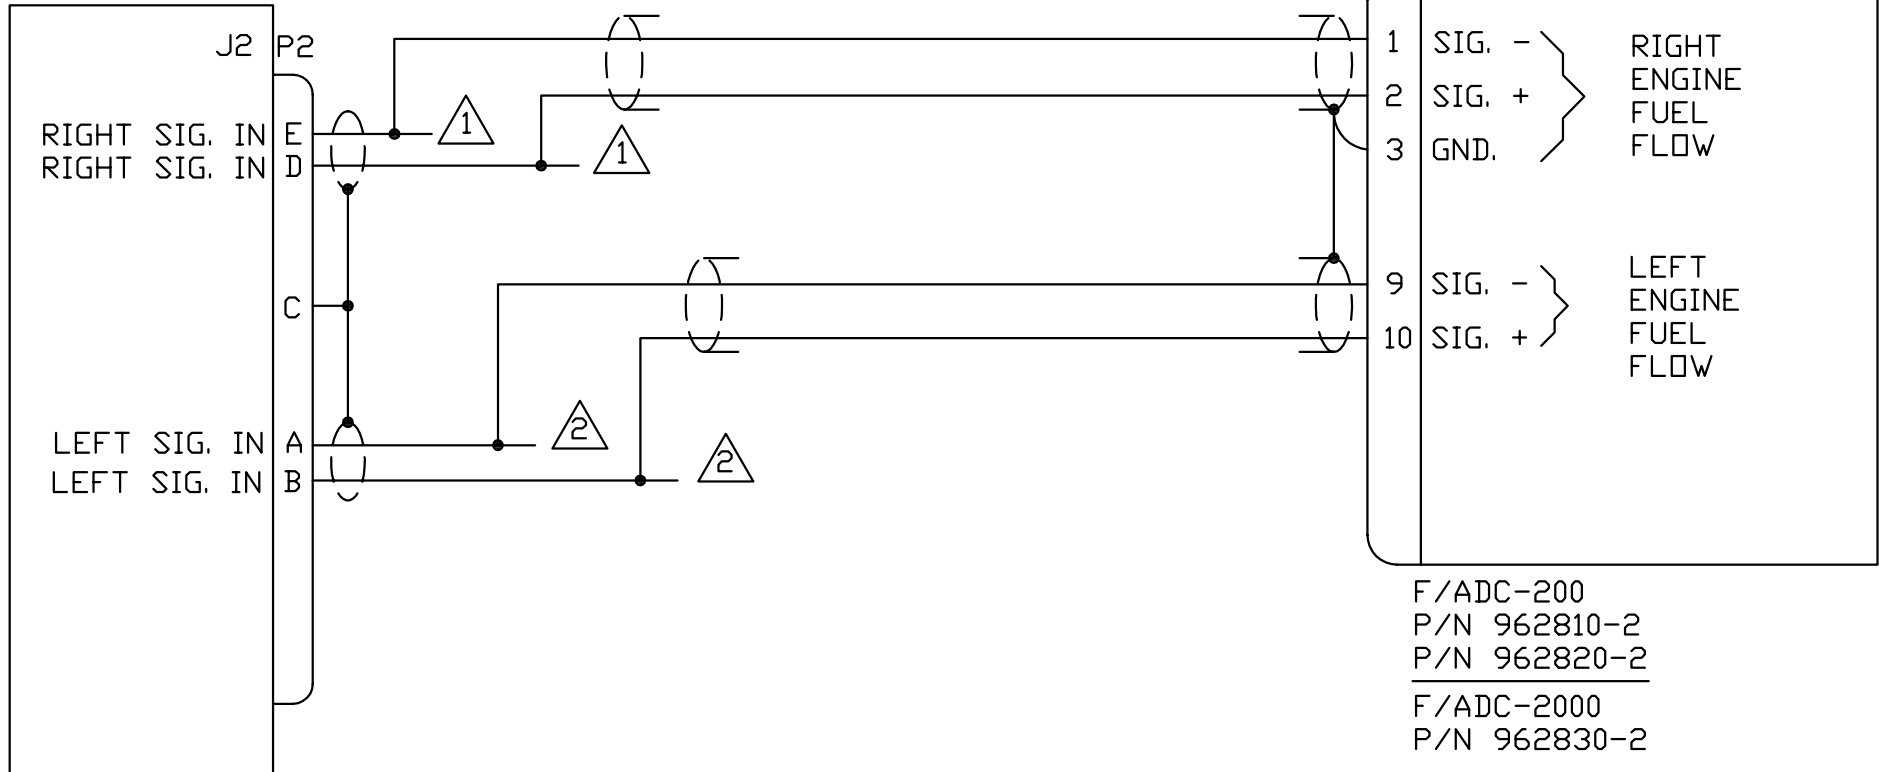


F/ADC-200
P/N 962810-2
P/N 962820-2
F/ADC-2000
P/N 962830-2

| | | | | | |
|---------------|----------|-----|-----|-----|-----|
| SIG COND. P/N | K-FACTOR | SW1 | SW2 | SW3 | SW4 |
| PC-620-0098 | 33800 | 6 | 9 | 6 | 9 |


| | | |
|----------------------------|-------------------------------------|---------------|
| DRAWING DATE 12/17/97 | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER DMD | INSTALLATION WIRING: | |
| APPROVED KCL | F/ADC-200(2000) TO MITSUBISHI | |
| FILE NAME 4028-909B.DWG | MU-2 W/FOXBORO PC-620 SYSTEM | |
| DIRECTORY 4028 | DRAWING NO. 4028-909 | SIZE A P/N |
| ECD # | DO NOT SCALE | REV B |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|----------------------|
| 0501/032 | B | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK |
| 0007/031 | A | 7/19/00 | PAB | RH | ADD 'OR PC-425-0098' |
| 9711/021 | - | 1/8/98 | DMD | KCL | BASELINE RELEASE |

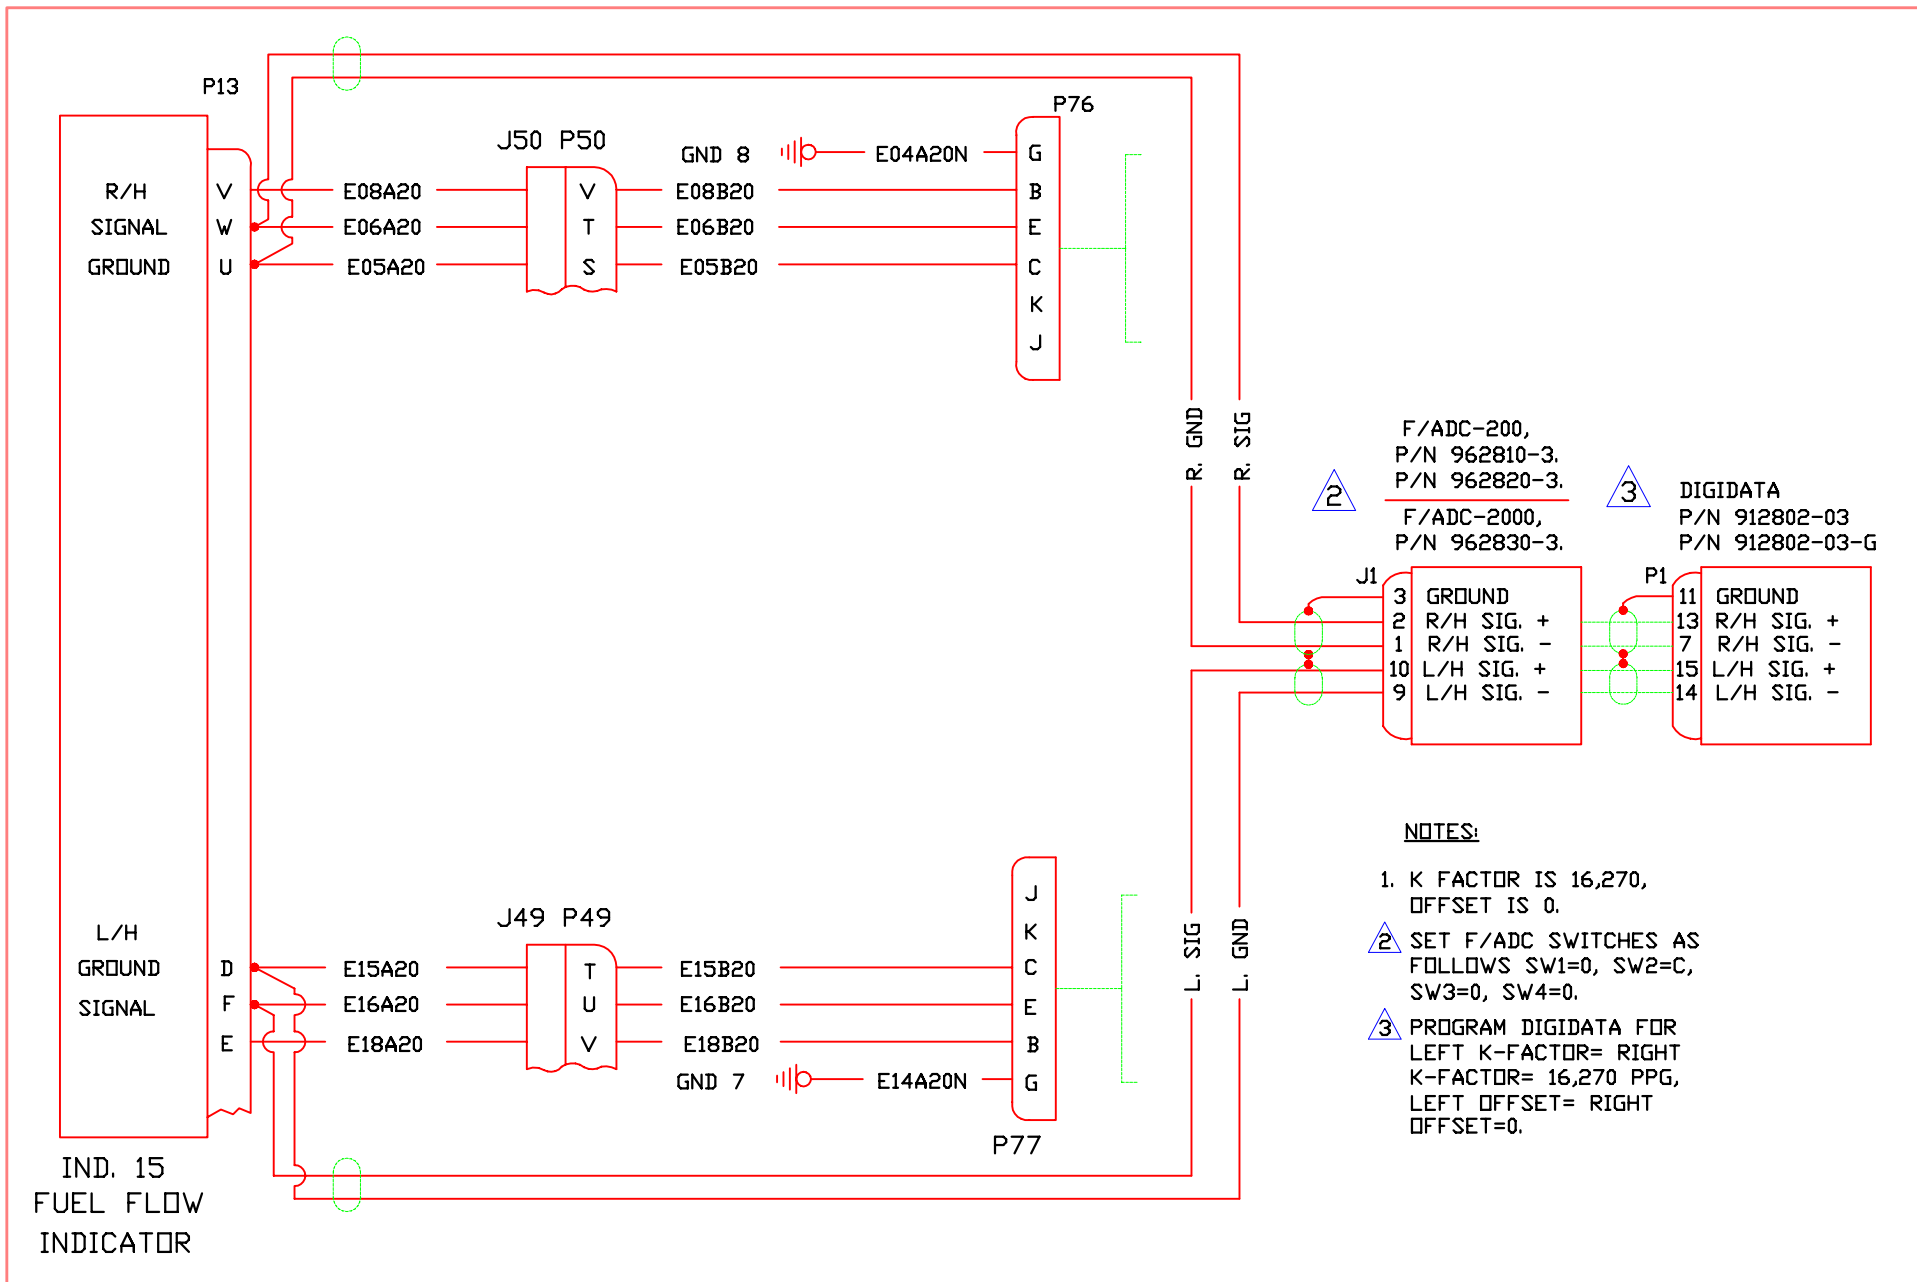

| | | | | | | | | |
|----------|------|---------|-----|-------|------------------------------|--|---|--|
| | | | | | DRAWING DATE 3/24/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| | | | | | DRAFTER SRB | | INSTALLATION WIRING, F/ADC200, 2000 OR DIGIDATA WITH DC FF TO CESSNA CITATION 500, 501, 550, 5550, 551, 552. | |
| | | | | | APPROVED KCL | | DRAWING NO. | |
| | | | | | FILE NAME 4028-936A.J.DWG | | SIZE | |
| | | | | | DIRECTOR 4028 | | A P/N | |
| | | | | | SHEET 1 OF 1 | | REV A | |
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK | | | |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE | | | |
| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION | | | |


NOT TO SCALE

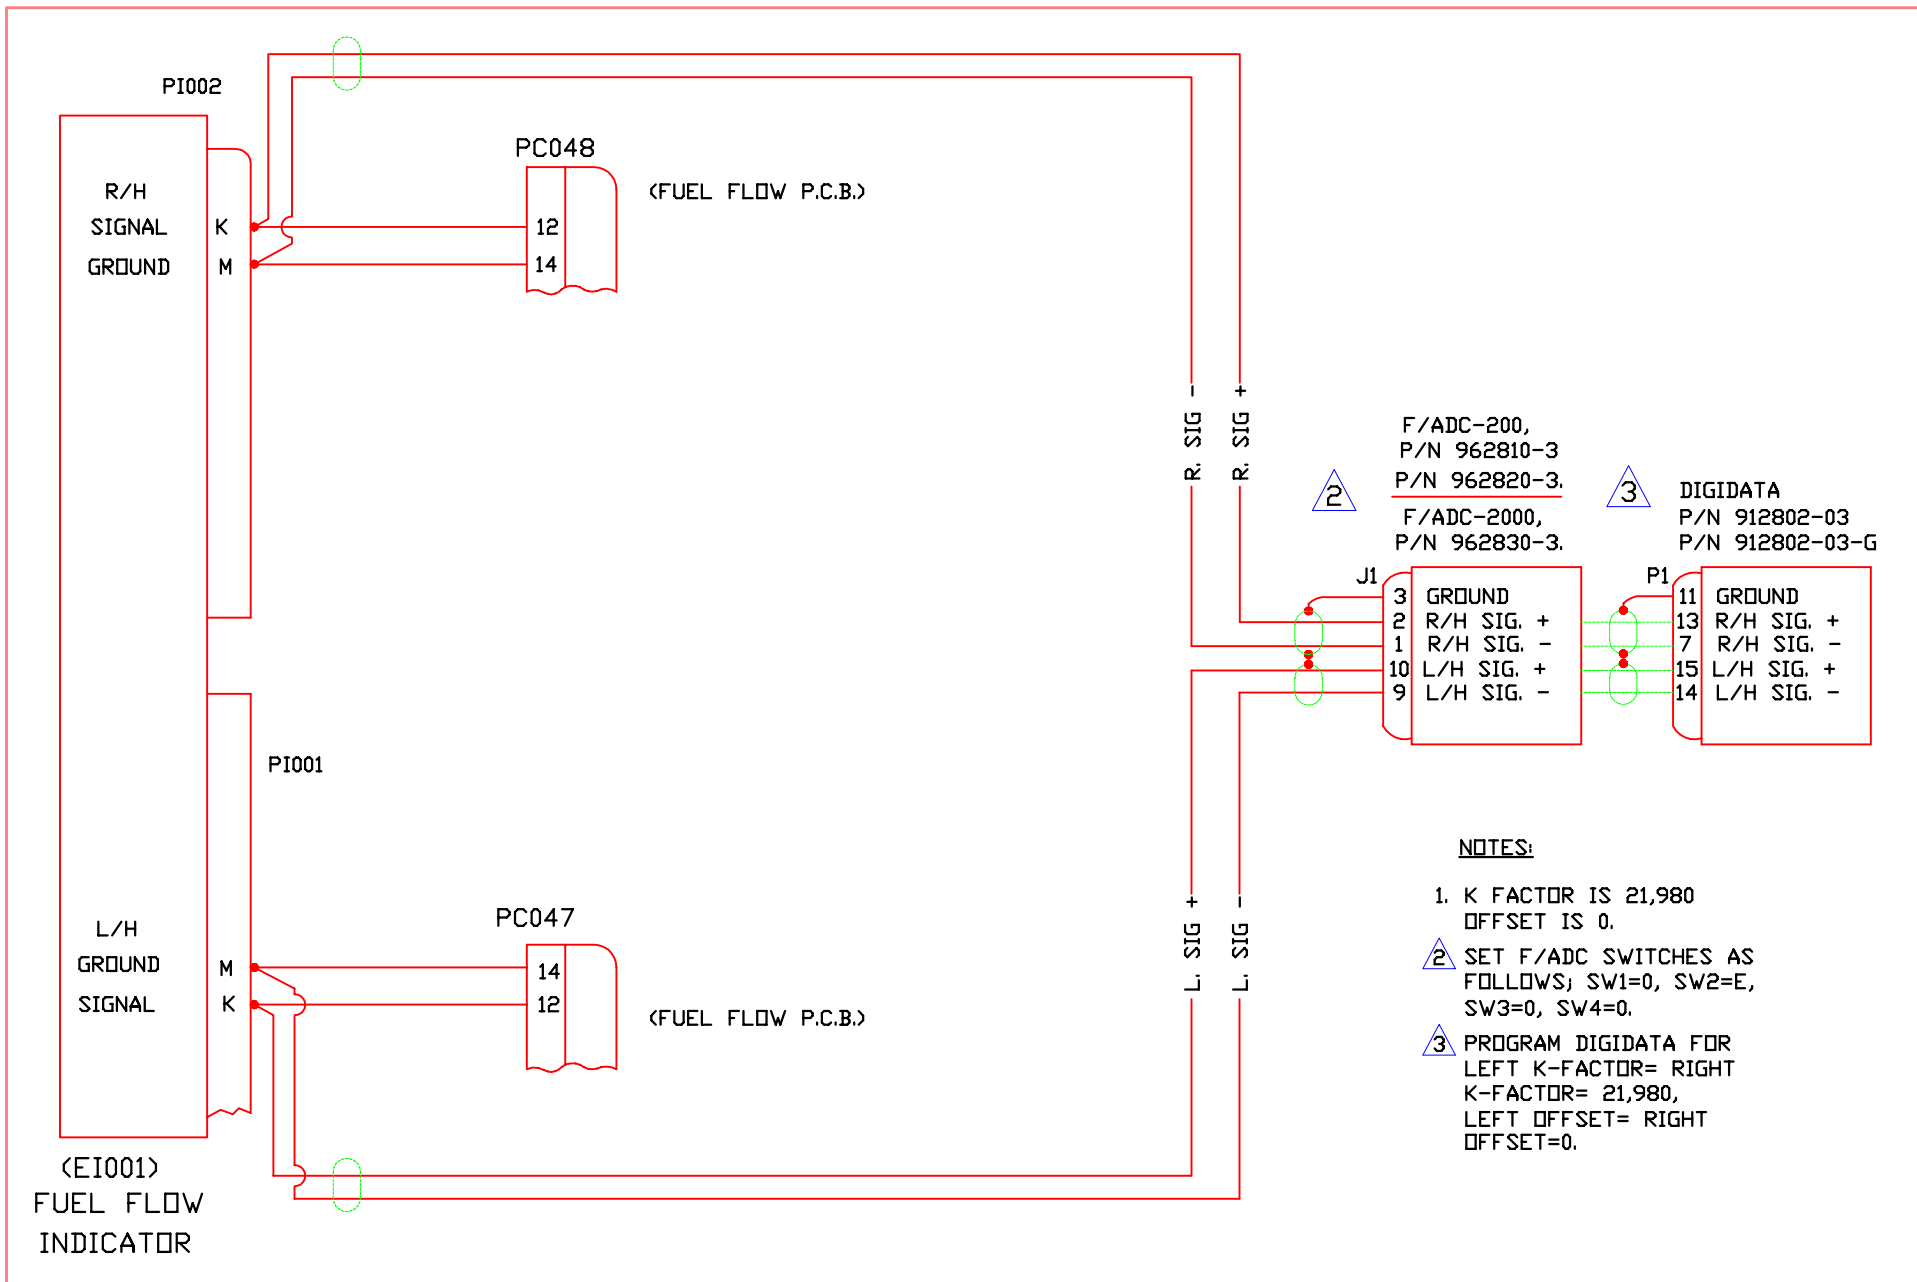

NOTES:

1. K FACTOR IS 21,980
OFFSET IS 0.
2. SET F/ADC SWITCHES AS FOLLOWS; SW1=0, SW2=E, SW3=0, SW4=0.
3. PROGRAM DIGIDATA FOR LEFT K-FACTOR= RIGHT K-FACTOR= 21,980, LEFT OFFSET= RIGHT OFFSET=0.

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|------|---------|-----|-------|---------------------|--------------|---|---------|-----|-----|---------------------|----------|---|---------|-----|-----|------------------|-------|------|------|----|-------|-------------|--|--|--|--|---|----------|
| <table border="1"> <tr> <td>0501/032</td> <td>A</td> <td>2/14/05</td> <td>PAB</td> <td>WMP</td> <td>UPDATED TITLE BLOCK</td> </tr> <tr> <td>9803/025</td> <td>-</td> <td>3/26/98</td> <td>SRB</td> <td>KCL</td> <td>BASELINE RELEASE</td> </tr> <tr> <td>ECD #</td> <td>REV.</td> <td>DATE</td> <td>BY</td> <td>APP'D</td> <td>DESCRIPTION</td> </tr> </table> | | | | | | 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK | 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE | ECD # | REV. | DATE | BY | APP'D | DESCRIPTION | DRAWING DATE 3/24/98 DRAFTER SRB APPROVED KCL FILE NAME 4028-937A.JDWG DIRECTORY 4028 | | SHADIN MINNEAPOLIS, MN 55426 INSTALLATION WIRING, F/ADC200, 2000 OR DIGIDATA WITH DC FF TO CESSNA CITATION 525 JET | | DRAWING NO. 4028-937 SIZE A P/N _____ | REV A |
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK | | | | | | | | | | | | | | | | | | | | | | | | |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE | | | | | | | | | | | | | | | | | | | | | | | | |
| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION | | | | | | | | | | | | | | | | | | | | | | | | |
| NOT TO SCALE | | | | | | SHEET 1 OF 1 | | | | | | | | | | | | | | | | | | | | | | | |

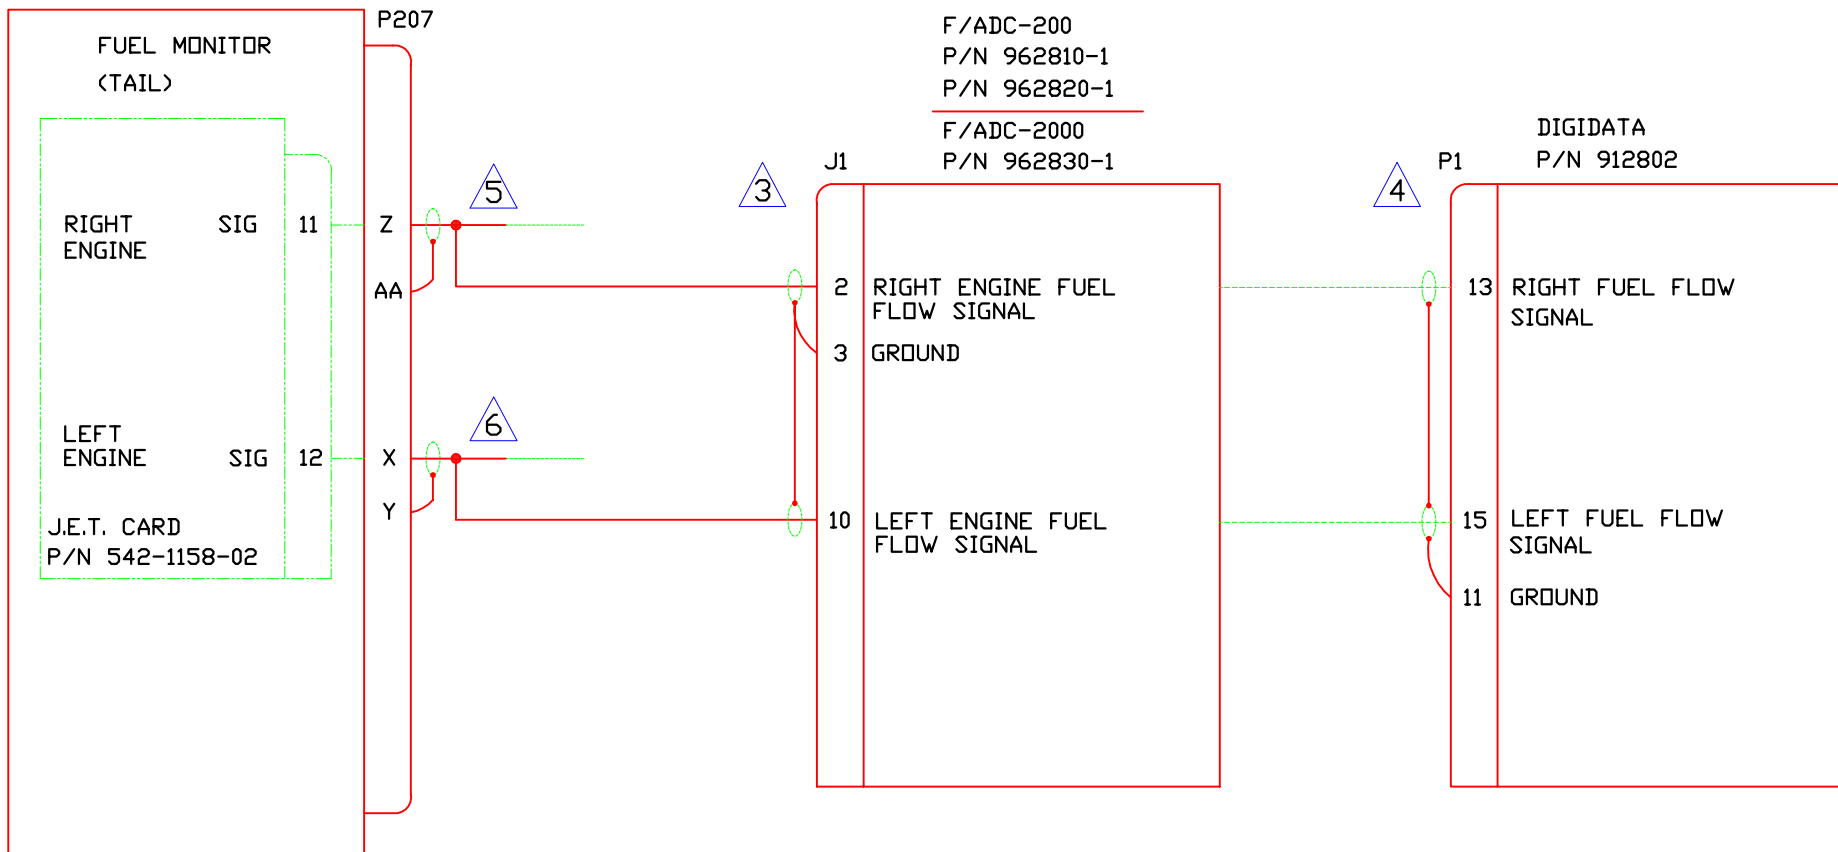

NOTES:

1. THIS INSTALLATION APPLICABLE TO AIRCRAFT WITH J.E.T. FUEL MODULE PART NUMBER 542-1158-02 ONLY. J.E.T. MODULE NOS. 542-1158-01 MAY BE CHANGED TO 542-1158-02 BY J.E.T. SB542-1158-7B.
2. K-FACTOR IS 860.
3. SET F/ADC SWITCHES AS FOLLOWS; SW1=D, SW2=D, SW3=D, SW4=D.
4. PROGRAM THE DIGIDATA FOR LEFT K-FACTOR = RIGHT K-FACTOR = 860 PPG, LEFT OFFSET = RIGHT OFFSET = 0.
5. J.E.T. CARD PIN 11 CORRESPONDS TO FUEL MONITOR PIN Z.
6. J.E.T. CARD PIN 12 CORRESPONDS TO FUEL MONITOR PIN X.


| | | |
|-----------------------------|-------------------------------------|-----------|
| DRAWING DATE 3/24/98 | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER SRB | INSTALLATION WIRING, F/ADC200, 2000 | |
| APPROVED KCL | OR DIGIDATA WITH DIGITAL FF TO | |
| FILE NAME 4028-938A.JDWG | BOMBARDIER LEARJET 24, 25D. | |
| DIRECTORY 4028 | DRAWING NO. 4028-938 | SIZE A |
| SHEET 1 OF 1 | P/N | REV A |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---------------------------|
| 0501/006 | A | 1/17/05 | PAB | ZK | CORRECTED NOTES 1, 5, & 6 |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

NOT TO SCALE

F/ADC-200
P/N 962810-2
P/N 962820-2

F/ADC-2000
P/N 962830-2

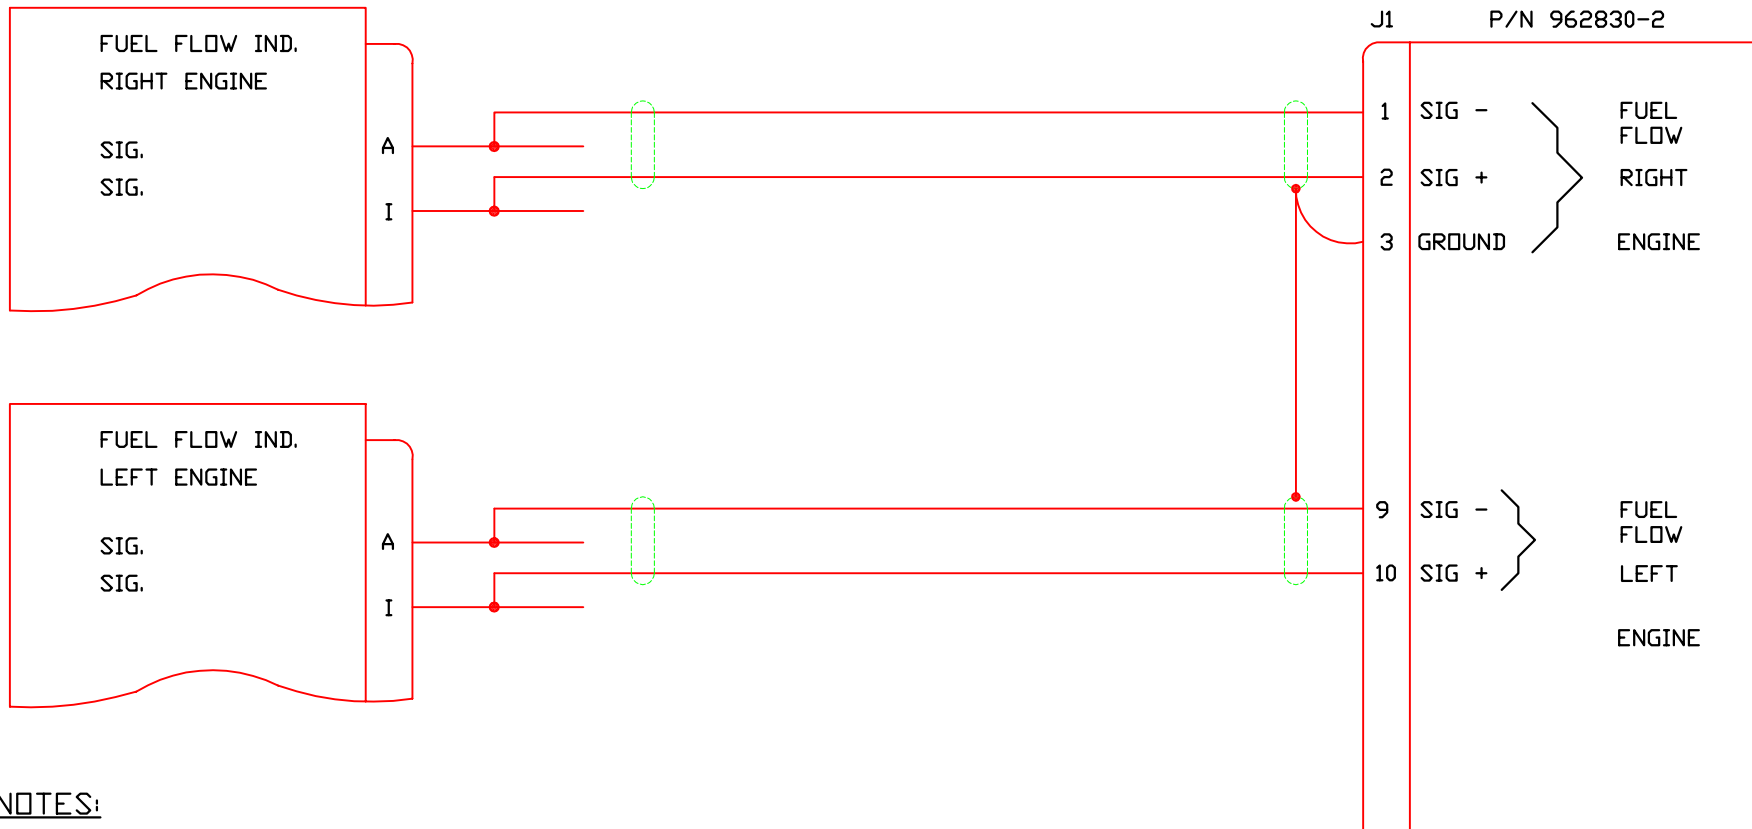


NOTES:

- FOR AIRCRAFT WITH THE FOLLOWING INDICATORS/TRANSMITTERS;
 - INDICATOR PART NOS. 850590-1, 850590-507, DSF1549 OR D5154-9.
 - TRANSMITTER PART NOS. 850590-513, 850590-515, TFF2905-11 OR 151906-001.
- K-FACTOR IS 27.6 (27,600 PPG).
- SET F/ADC SWITCHES TO: SW1 = F, SW2 = 0, SW3 = F, SW4 = 0.

| | | | |
|----------------------------|--|--------------------------------------|-------------|
| DRAWING DATE 3/24/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER SRB | | INSTALLATION WIRING, F/ADC-200, 2000 | |
| APPROVED KCL | | WITH SINE FF TO ROCKWELL COMMANDER | |
| FILE NAME 4028-939A.DWG | | 690 AND 695 | |
| DIRECTOR 4028 | | DRAWING NO. | SIZE |
| SHEET 1 OF 1 | | 4028-939 | A P/N _____ |
| | | | REV A |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---------------------|
| 0501/032 | A | 2/14/05 | PAB | VMP | UPDATED TITLE BLOCK |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

NOT TO SCALE

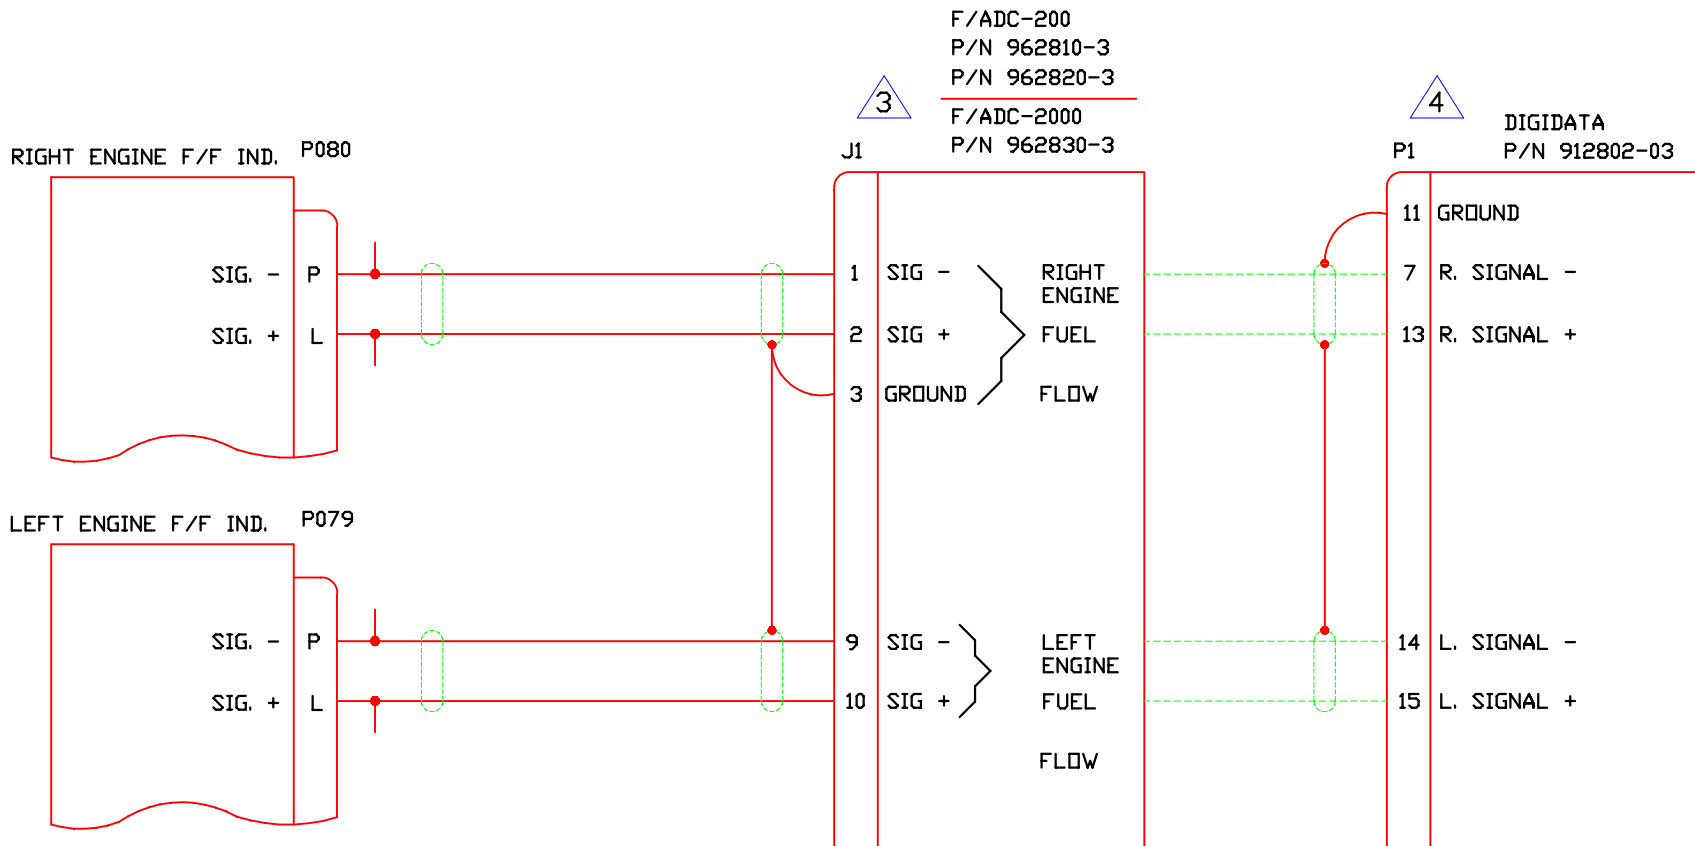

NOTES:


1. FOR AIRCRAFT SERIAL NOS. RK-45, RK-49 AND AFTER WITH FUEL INDICATOR PART NO. PC900-3B2000-PH1.
2. K-FACTOR IS 11.54 (11,540 PPG), OFFSET IS 0.
3. SET F/ADC SWITCHES TO: SW1 = 0, SW2 = 2, SW3 = 0, SW4 = 0.
4. PROGRAM DIGIDATA FOR LEFT K-FACTOR = RIGHT K-FACTOR = 11,540 PPG, LEFT OFFSET = RIGHT OFFSET = 0.

| | | | | | | | | | | | | | |
|---|------|---------|-----|-------|---------------------|-------------------------------------|--|--|--|-------------------------|-----------|-----------|----------|
| DRAWING DATE: 3/24/98 DRAFTER: SRB APPROVED: KCL FILE NAME: 4028-940A.DWG DIRECTORY: 4028 | | | | | | SHADIN MINNEAPOLIS, MN 55426 | | INSTALLATION WIRING, F/ADC-200, 2000 OR DIGIDATA WITH DC FF TO RAYTHEON BEECHJET 400A AIRCRAFT | | DRAWING NO. 4028-940 | SIZE A | P/N _____ | REV A |
| NOT TO SCALE | | | | | | SHEET 1 OF 1 | | | | | | | |
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK | | | | | | | | |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE | | | | | | | | |
| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION | | | | | | | | |

F/ADC-200
P/N 962810-3
P/N 962820-3

3
J1
F/ADC-2000
P/N 962830-3

4
P1
DIGIDATA
P/N 912802-03

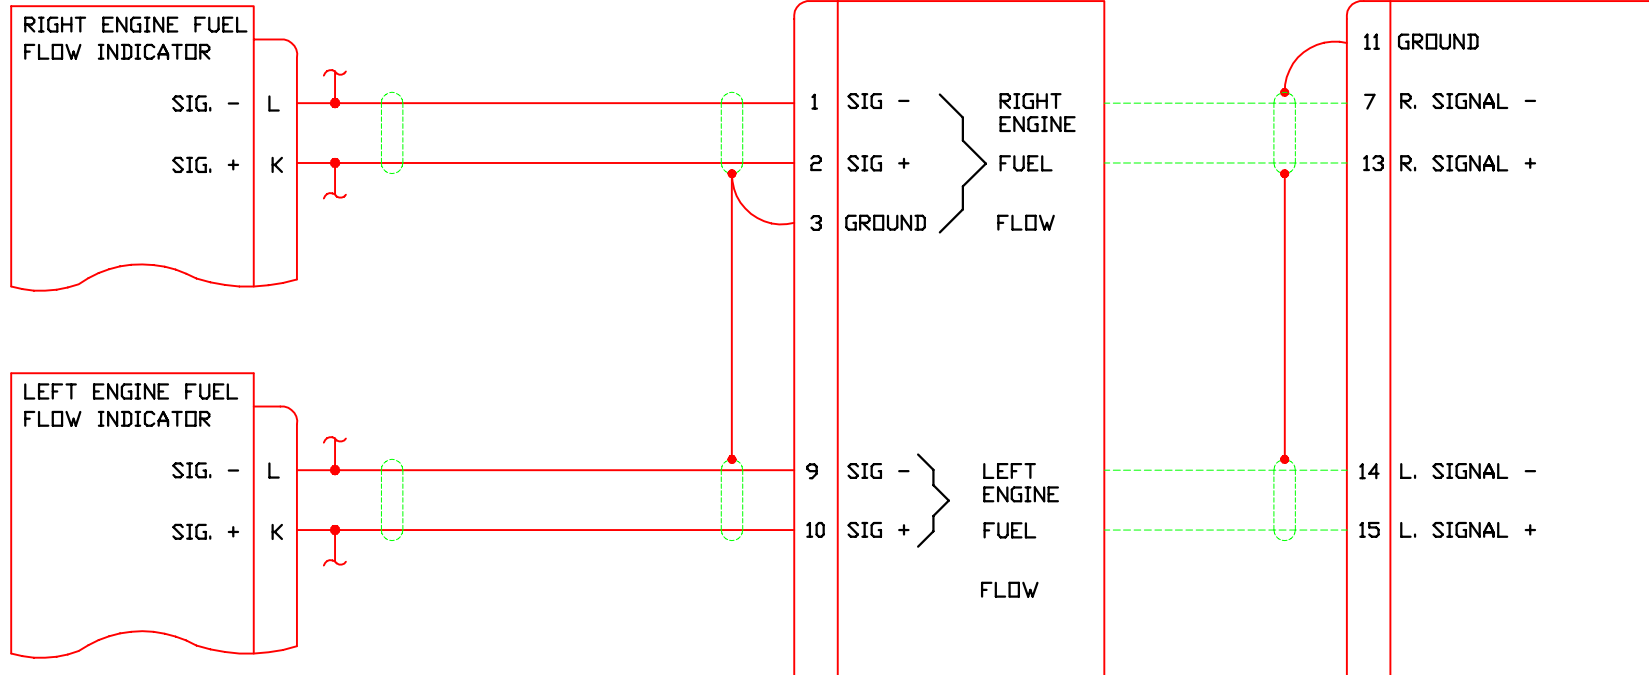


NOTES:

1. FOR AIRCRAFT WITH THE FOLLOWING INDICATOR/TRANSMITTERS;
 - A. INDICATOR PART NO. (RAGEN) 1291-2
 - B. TRANSMITTER PART NO. (GULL) 151-909-001
2. K-FACTOR IS 10.49 (10,490 PPG), OFFSET IS 0.
- 3** SET AIRDATA SWITCHES AS FOLLOWS; SW1 = 1, SW2 = 8, SW3 = 0, SW4 = 0.
- 4** PROGRAM DIGIDATA FOR LEFT K-FACTOR = RIGHT K-FACTOR = 10,490 PPG, LEFT OFFSET = RIGHT OFFSET = 0.

| | | | | | | | | | |
|----------|------|---------|-----|-------|---------------------|------------------------------|--|---|--|
| | | | | | | DRAWING DATE 3/25/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| | | | | | | DRAFTER SRB | | INSTALLATION WIRING, F/ADC-200, 2000 OR DIGIDATA WITH DC FF TO WESTWIND 1124 MODELS | |
| | | | | | | APPROVED KCL | | | |
| | | | | | | FILE NAME 4028-941A.J.DWG | | | |
| | | | | | | DIRECTOR 4028 | | DRAWING NO. 4028-941 | |
| | | | | | | SHEET 1 OF 1 | | SIZE A | |
| | | | | | | | | P/N | |
| | | | | | | | | REV A | |
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK | | | | |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE | | | | |
| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION | NOT TO SCALE | | | |

F/ADC-200
P/N 962810-2
P/N 962820-2
F/ADC-2000
P/N 962830-2

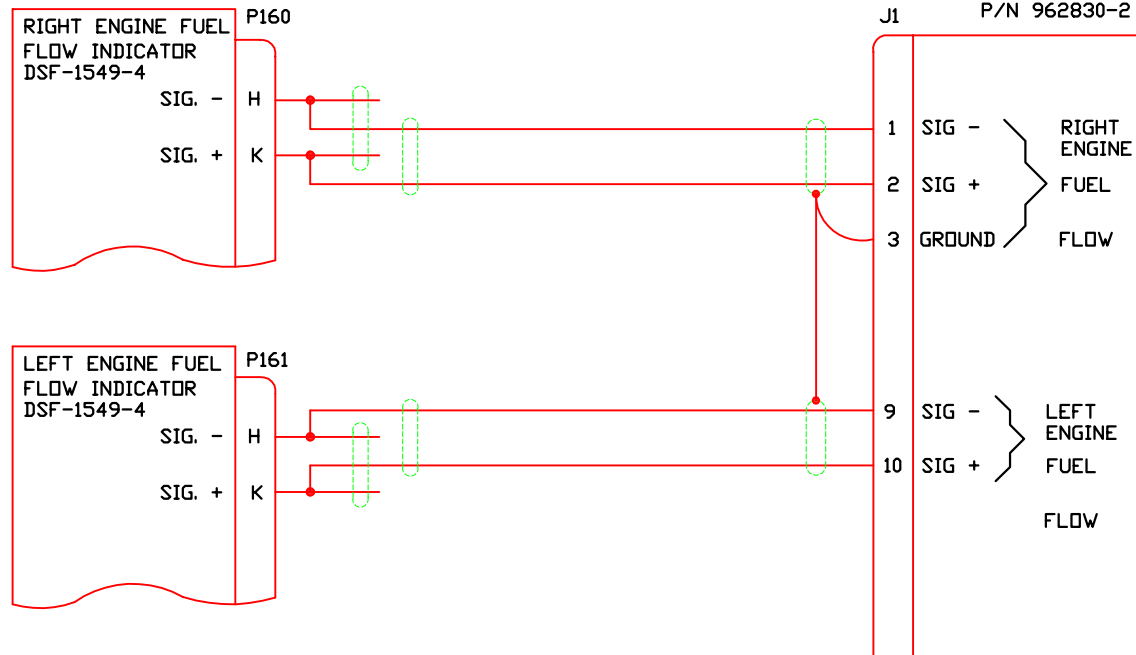

DSF-1549-2

DSF-1549-4

DSF-1549-5

| | |
|---------------------------------|---|
| FLOW TURBINE (FROM PROB) | A |
| COMPENSATOR (ENVIRONMENT) | B |
| SIGNAL GROUND | C |
| CASE GROUND | D |
| DC POWER INPUT (APPROX. 28 VDC) | E |
| TOTALIZER LOW (-) | F |
| TOTALIZER OUTPUT (+) | G |
| TEMP SENSOR | H |
| SIGNAL GROUND | I |
| DC GROUND | J |

| | |
|---------------------------|---|
| 5V LIGHT RETURN | A |
| 28 VDC POWER INPUT | B |
| 28 VDC POWER RETURN | C |
| CASE GROUND | D |
| COMPENSATOR (ENVIRONMENT) | E |
| SIGNAL GROUND | F |
| TOTALIZER GROUND | G |
| SIGNAL GROUND | H |
| TOTALIZER OUTPUT | J |
| FLOW TURBINE (FROM PROB) | K |
| TEMP SENSOR | L |
| 5 VDC LIGHT (+) | M |

| | |
|---------------------------------|---|
| FLOW TURBINE (FROM PROB) | A |
| COMPENSATOR (ENVIRONMENT) | B |
| GROUND | C |
| CASE GROUND | D |
| DC POWER INPUT (APPROX. 28 VDC) | E |
| SIGNAL GROUND | F |
| TOTALIZER OUTPUT | G |
| TEMP SENSOR | H |
| DC GROUND | J |

NOTES:


- FOR AIRCRAFT WITH FUEL FLOW INDICATOR PART NOS. DSF-1549-2, -4, -5. SEE TABLE FOR INDICATOR PINOUTS.
- K-FACTOR IS 26.8 (26,800 PPG).
- SET AIRDATA SWITCHES AS FOLLOWS; SW1 = C, SW2 = 7, SW3 = C, SW4 = 7.

| | | | |
|------------------------------|--------------------------------------|-----------|-----------|
| DRAWING DATE 3/25/98 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER SRB | INSTALLATION WIRING, F/ADC-200, 2000 | | |
| APPROVED KCL | TO FAIRCHILD SA226 SERIES AIRCRAFT. | | |
| FILE NAME 4028-942A.J.DWG | DRAWING NO. 4028-942 | SIZE A | P/N _____ |
| DIRECTORY 4028 | SHEET 1 OF 1 | | REV A |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|----------------------------|
| 0501/006 | A | 2/14/05 | PAB | VMP | CORRECTED PINOUTS & NOTE 1 |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

NOT TO SCALE

962810-X }
 962820-X } X = 1, 2, 3
 962830-X }

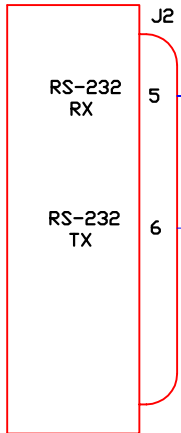


| | | | | | | | | | | | | | | | |
|-----------|--------------------|------------------------------------|--------------------------|---|-------------|----------------------------|----------------|-----------------|-------------------------------------|-----------------|--------------------------|--|----------------------------|-------------------|---------|
| CNX 80 | GARMIN 430, 530 | BENDIX/ KING KLN90 KLN90B | BENDIX/ KING KLN89 | GARMIN 150, 155, 155XL, 165, 250, 250XL 300, 300XL | LNS 6000 | BENDIX/ KING KLN 900 | FOSTER 7000 | IIMORROW 360 | IIMORROW NMS2001 | IIMORROW 820 | IIMORROW GX 50, 60 | ARNAV FMS7000, R5000 STAR5000 | MAGELLAN SKYNAV 5000 | IIMORROW GX 55 | |
| | | | | | | | | | | | | | A B | | |
| TX 22 | TX 56 | TX 13 | TX 2 | TX 24 | TX 25 | TX 6 | TX A | TX 8/1 | TX (SOFTWARE SELECT) 19/37 | TX 6 | TX 5 | TX 3 | TX 12 | TX 25 | TX 6 |
| RX 21 | RX 57 | RX 36 | RX 1 | RX 17 | RX 26 | RX 38 | RX R | RX 20/14 | RX 21/38 | RX 7 | RX 4 | RX 4 | RX 11 | RX 23 | RX 7 |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|------------------------|
| 0501/006 | C | 1/17/05 | PAB | ZK | ADDED CNX 80 |
| 0211/047 | B | 2/7/03 | PAB | BAL | DEL PIN 9; ADDED GND |
| 0009/006 | A | 9/6/00 | PAB | EDJ | ADD GARMIN 430/530 GPS |
| 9803/025 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

| | | | |
|------------------------------|--------------------------------------|-----------|-----------|
| DRAWING DATE 3/25/98 | SHADIN MINNEAPOLIS, MN 55426 | | |
| DRAFTER SRB | INSTALLATION WIRING, F/ADC-200, 2000 | | |
| APPROVED PAB | TO NAV RECEIVERS W/RS-232 | | |
| FILE NAME 4028-943C.J.DWG | DRAWING NO. 4028-943 | SIZE A | P/N _____ |
| DIRECTORY 4028 | SHEET 1 OF 1 | | REV C |

NOT TO SCALE

F/ADC-200
P/N 962810-2
P/N 962820-2
F/ADC-2000
P/N 962830-2

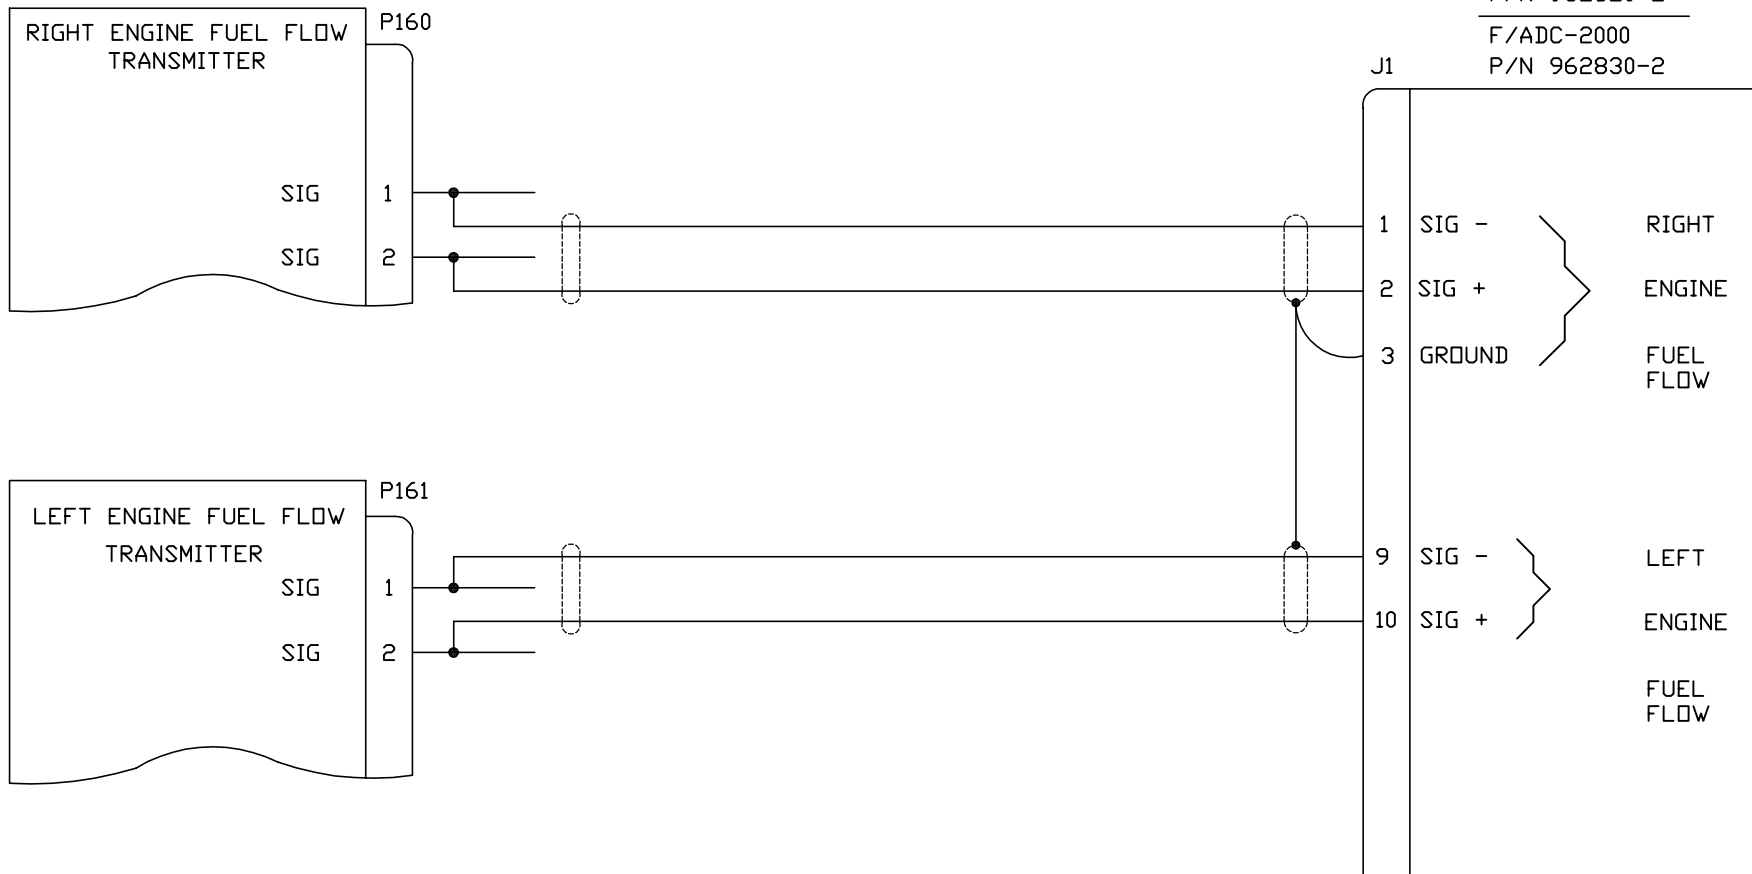


NOTES:

1. FOR AIRCRAFT WITH FAURE-HERMAN FUEL FLOW TRANSMITTERS, PART NO. TN(A)S-1024-118.
2. CONFIGURE THE F/ADC FOR THE ALTERNATE DIGITAL K-FACTOR TABLE: MATRIX 1. K-FACTOR IS 3.88 (3,880 PPG).
3. SET AIRDATA SWITCHES AS FOLLOWS; SW1 = 0, SW2 = 7, SW3 = 0, SW4 = 7.

| | | | |
|------------------------------|--|--|-----------|
| DRAWING DATE 3/26/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER SRB | | INSTALLATION WIRING, F/ADC-200, 2000 TO AEROSPATIALE AS365N2 DAUPHIN. | |
| APPROVED KCL | | | |
| FILE NAME 4028-949A.J.DWG | | DRAWING NO. | |
| DIRECTOR 4028 | | 4028-949 | |
| SHEET 1 OF 1 | | SIZE A | P/N _____ |
| NOT TO SCALE | | REV A | |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---------------------|
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK |
| 9803/041 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |





F/ADC-200
P/N 962810-2
P/N 962820-2
F/ADC-2000
P/N 962830-2

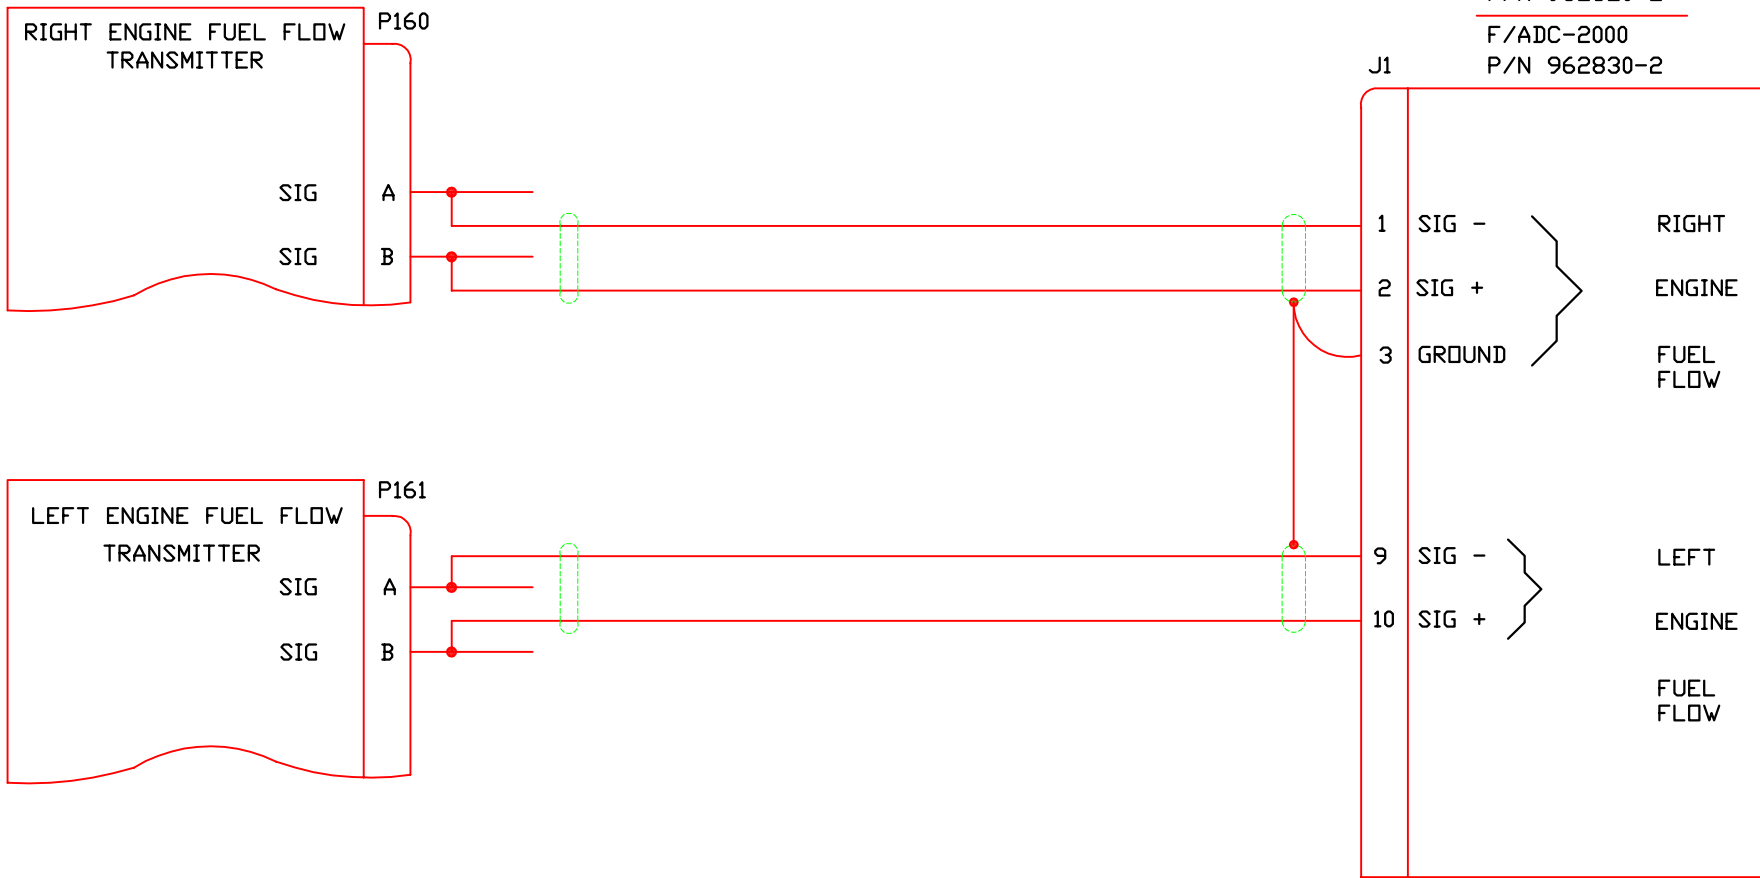

- NOTES:**
1. FOR AIRCRAFT WITH FAURE-HERMAN FUEL FLOW TRANSMITTERS, PART NO. TN(A)S-512-231-1.
 2. CONFIGURE THE F/ADC FOR THE ALTERNATE DIGITAL K-FACTOR TABLE: MATRIX 1. K-FACTOR IS 1.94 (1,940 PPG).
 3. SET AIRDATA SWITCHES TO; SW1 = 8, SW2 = 0, SW3 = 8, SW4 = 0.

| | | | |
|-----------------------------|--|--|-------|
| DRAWING DATE 3/26/98 | | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER SRB | | INSTALLATION WIRING, F/ADC-200, 2000 TO AEROSPATIALE AS332 SUPER PUMA | |
| APPROVED KCL | | | |
| FILE NAME 4028-950AJ.DWG | | DRAWING NO. | SIZE |
| DIRECTOR 4028 | | 4028-950 | A |
| SHEET 1 OF 1 | | P/N | _____ |
| NOT TO SCALE | | REV | A |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|---------------------|
| 0501/032 | A | 2/14/05 | PAB | WMP | UPDATED TITLE BLOCK |
| 9803/041 | - | 3/26/98 | SRB | KCL | BASELINE RELEASE |

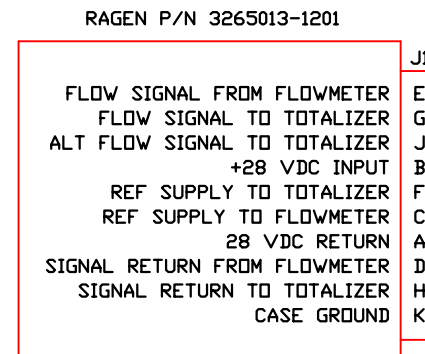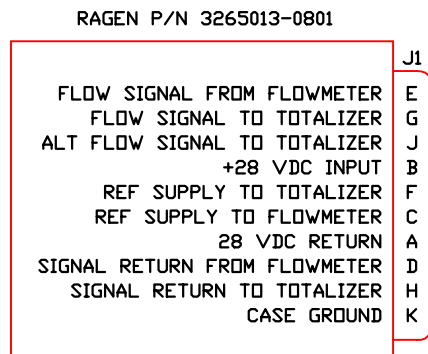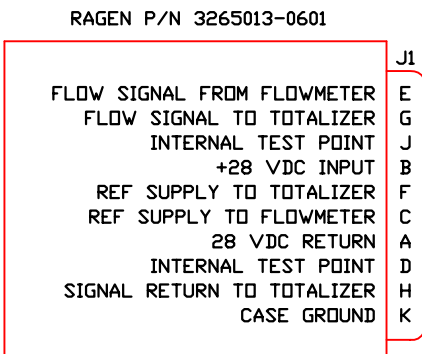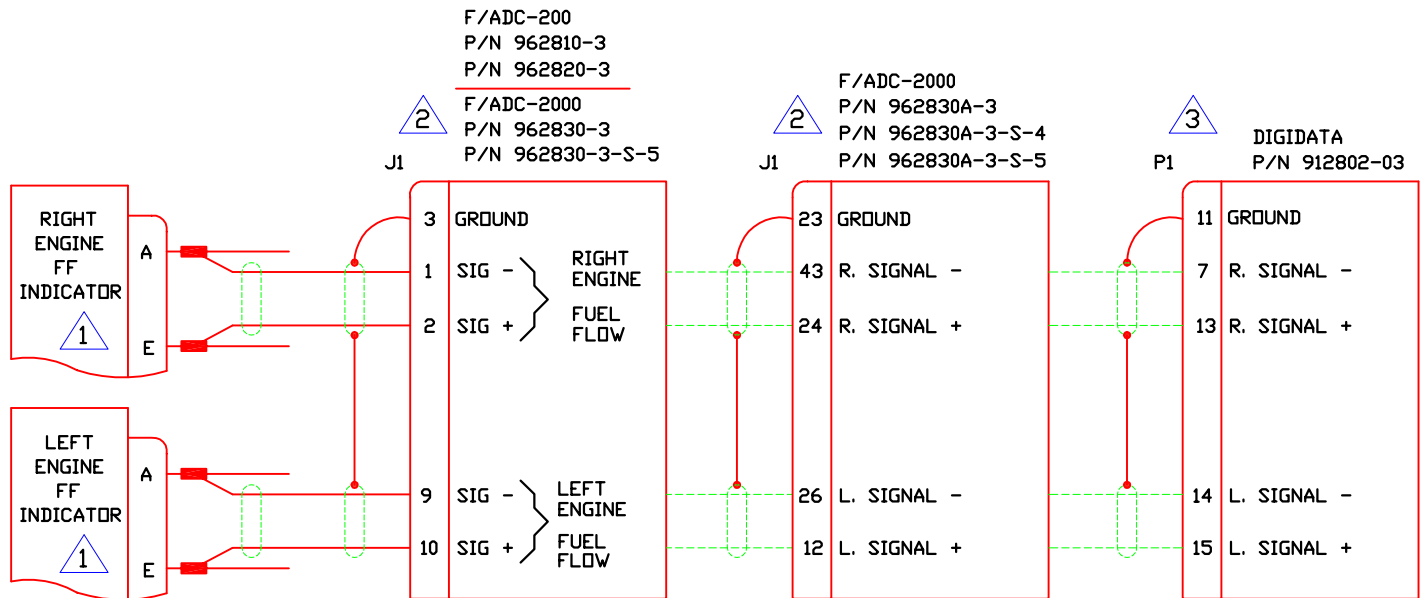

NOTES:

1. FOR AIRCRAFT WITH THE FOLLOWING INDICATOR/TRANSMITTERS; SEE TABLE FOR INDICATOR WIRING.
 INDICATOR PART NO. (RAGEN) 3265013-0601 w/TRANSMITTER PART NO. (RAGEN) 3268011-0101.
 INDICATOR PART NO. (RAGEN) 3265013-0801 + 3265013-1201 w/TRANSMITTER PART NO. (RAGEN) TFF-2905-9 OR PIPER P/N 489-487.
2. SET AIRDATA SWITCHES AS FOLLOWS; SW1 = 1, SW2 = 1, SW3 = 0, SW4 = 0.
3. PROGRAM DIGIDATA FOR LEFT K-FACTOR = RIGHT K-FACTOR = 46,160
 PPG, LEFT OFFSET = RIGHT OFFSET = 0.

| | | |
|-----------------------------|--------------------------------------|-----------|
| DRAWING DATE 8/7/98 | SHADIN MINNEAPOLIS, MN 55426 | |
| DRAFTER DMD | INSTALLATION WIRING, F/ADC-200, 2000 | |
| APPROVED KCL | OR DIGIDATA WITH DC FF PIPER | |
| FILE NAME 4028-A29C.JDWG | CHEYENNE PA31T | |
| DIRECTORY 4028 | DRAWING NO. 4028-A29 | SIZE A |
| SHEET 1 OF 1 | P/N _____ | REV C |

| ECD # | REV. | DATE | BY | APP'D | DESCRIPTION |
|----------|------|---------|-----|-------|--|
| 0501/006 | C | 1/17/05 | PAB | ZK | ADD IND 3265013-0801, & RAGEN P/N TABLES |
| 0001/016 | B | 1/31/00 | LJM | EDJ | ADD IND 3265013-1201, XMTR TFF-2905-9 TO NOTE 1. |
| 9901/015 | A | 1/20/99 | DMD | KCL | ADD P/NS 962830A-3-S-5, 962830-3-S-5 |
| 9808/012 | - | 8/7/98 | DMD | KCL | BASELINE RELEASE |

NOT TO SCALE