


HS and HB Models

50/60 Hz AC Frequency Power Converter
500 to 1200VA

Outline Drawing

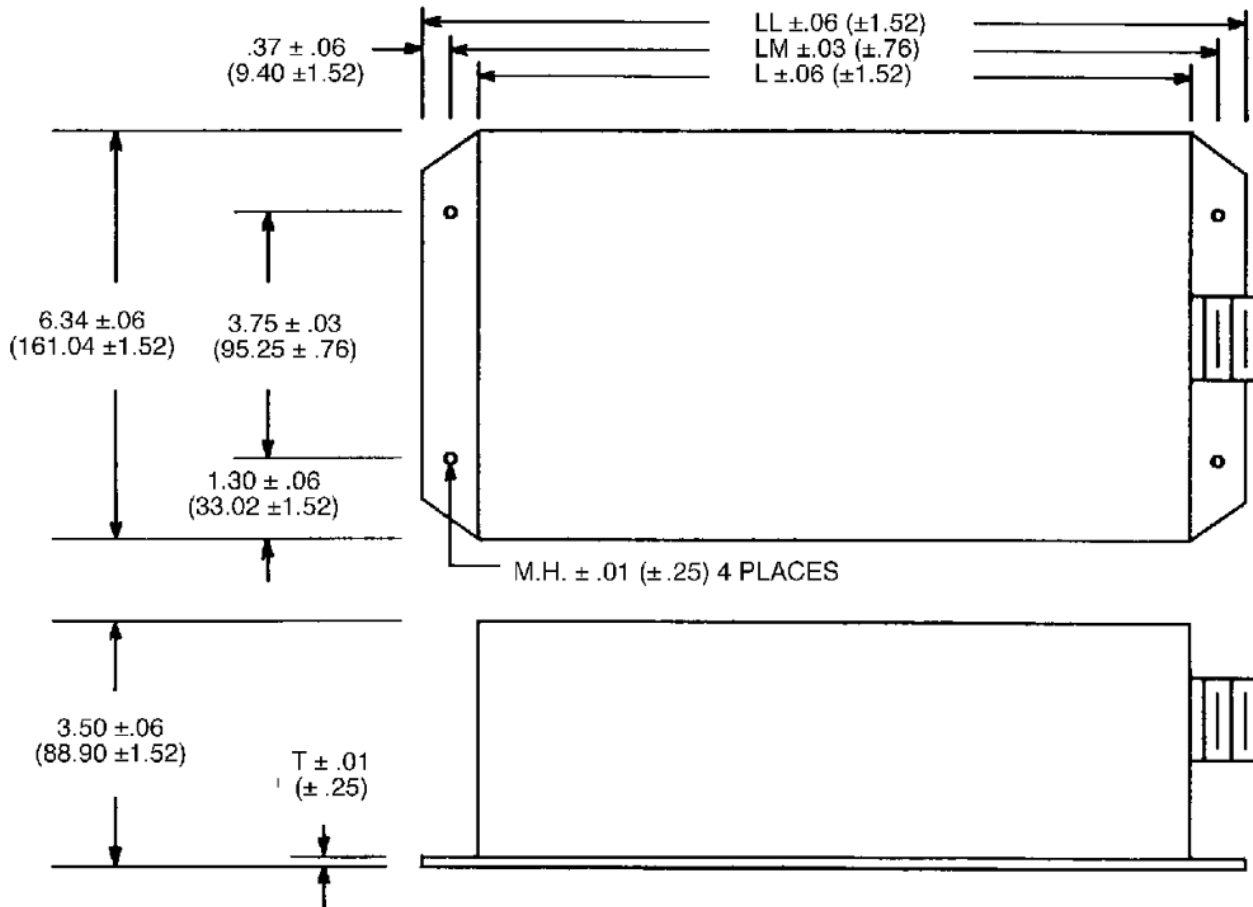

DIMENSIONS ARE IN INCHES (MILLIMETERS)

Model	Input Current (A/PH)	Output				Dimensions (See Figure 1)					Wt Lb (Kg) ±5%
		Voltage (VRMS) ±5%	Current (A) RMS	Frequency (Hz) ±.5 Hz	Power (VA)	LL Inch (MM)	LM Inch (MM)	L Inch (MM)	T Inch (MM)	M.H. Inch (MM)	
HS50	2.0	115	4.3	60	500	9.50 (241.30)	8.75 (222.25)	8.09 (205.49)	.06 (1.52)	.20 (5.08)	4.4 (2.00)
HS100	3.4	115	8.7	60	1000	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)
HS120	4.5	115	10.4	60	1200	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)
HB100	3.4	230	4.3	50	1000	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)
HB120	4.5	230	5.2	50	1200	12.00 (304.80)	11.25 (285.75)	10.60 (269.64)	.08 (2.03)	.28 (7.11)	7.5 (3.40)